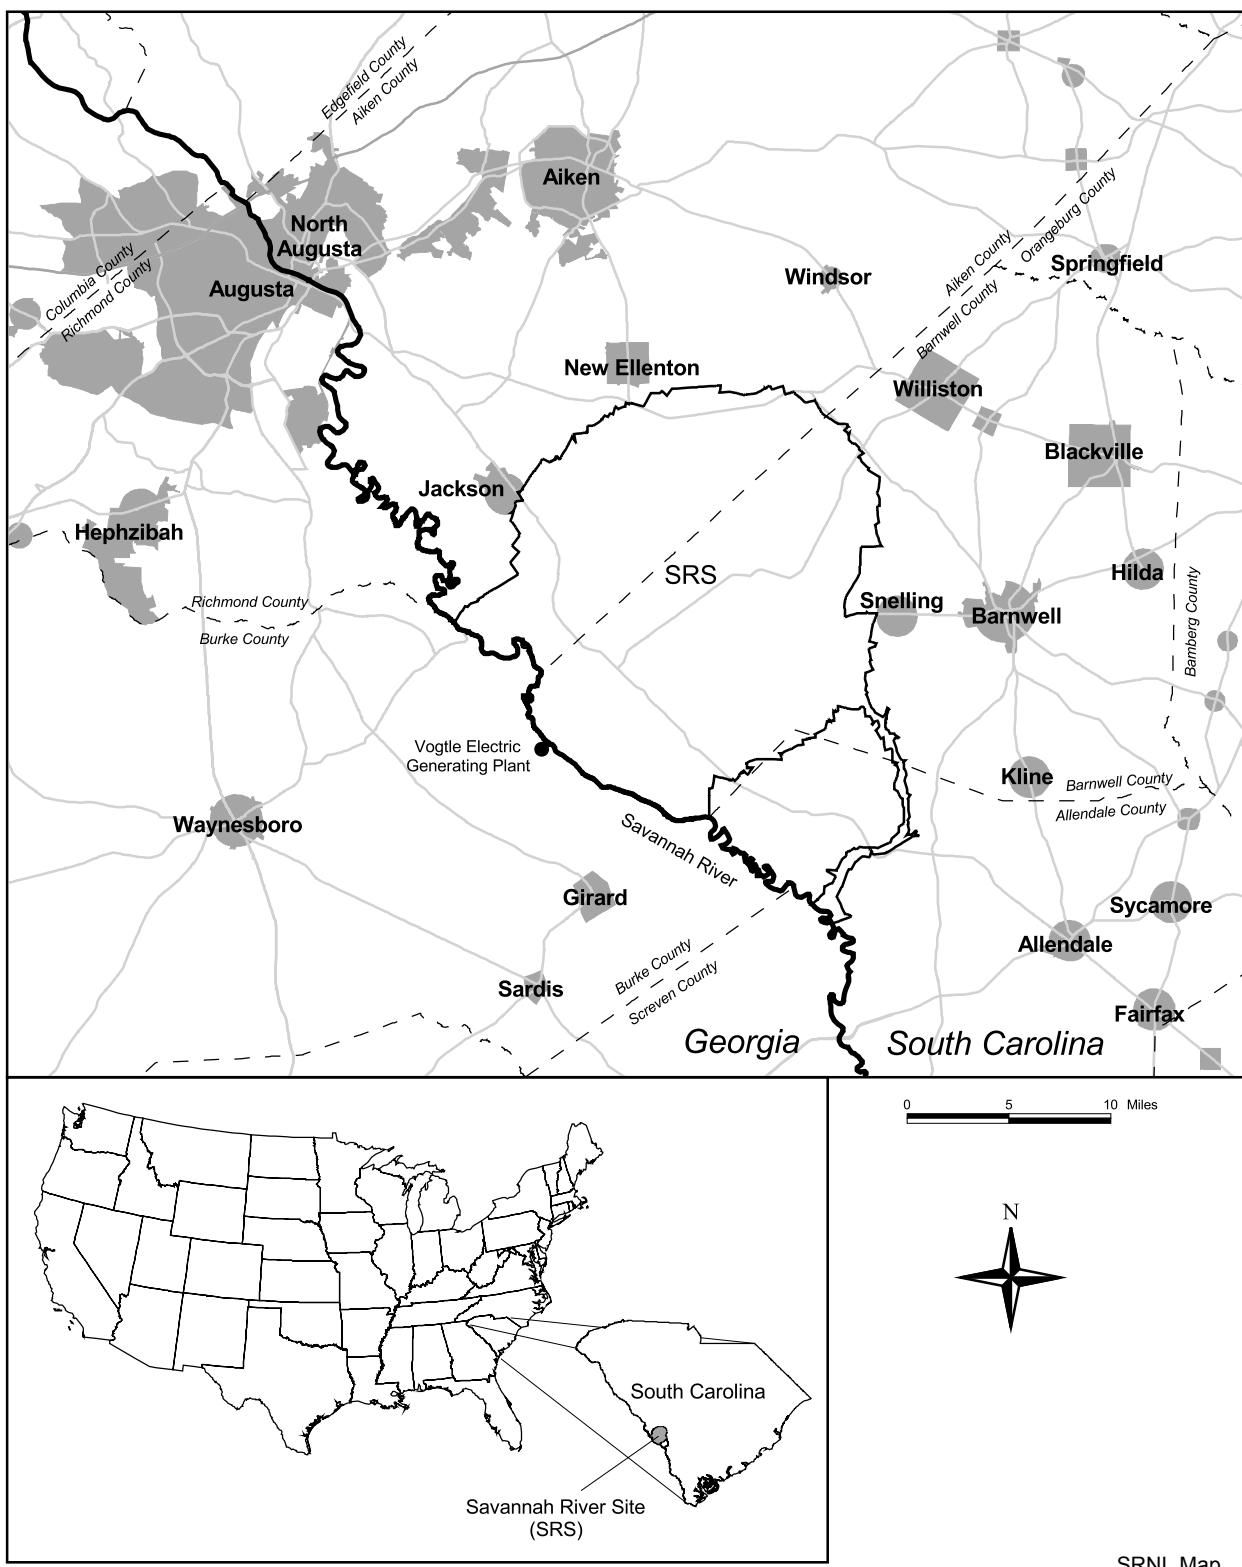


SRS Maps

- Site
- Sampling Locations
- Doses
- Groundwater

Savannah River Site Environmental Report for 2005

**Figure 1 The Savannah River Site**

SRS is located in South Carolina, about 12 miles south of Aiken, South Carolina, and about 15 miles southeast of Augusta, Georgia. The Savannah River flows along a portion of the site's southwestern border.

SRNL Map

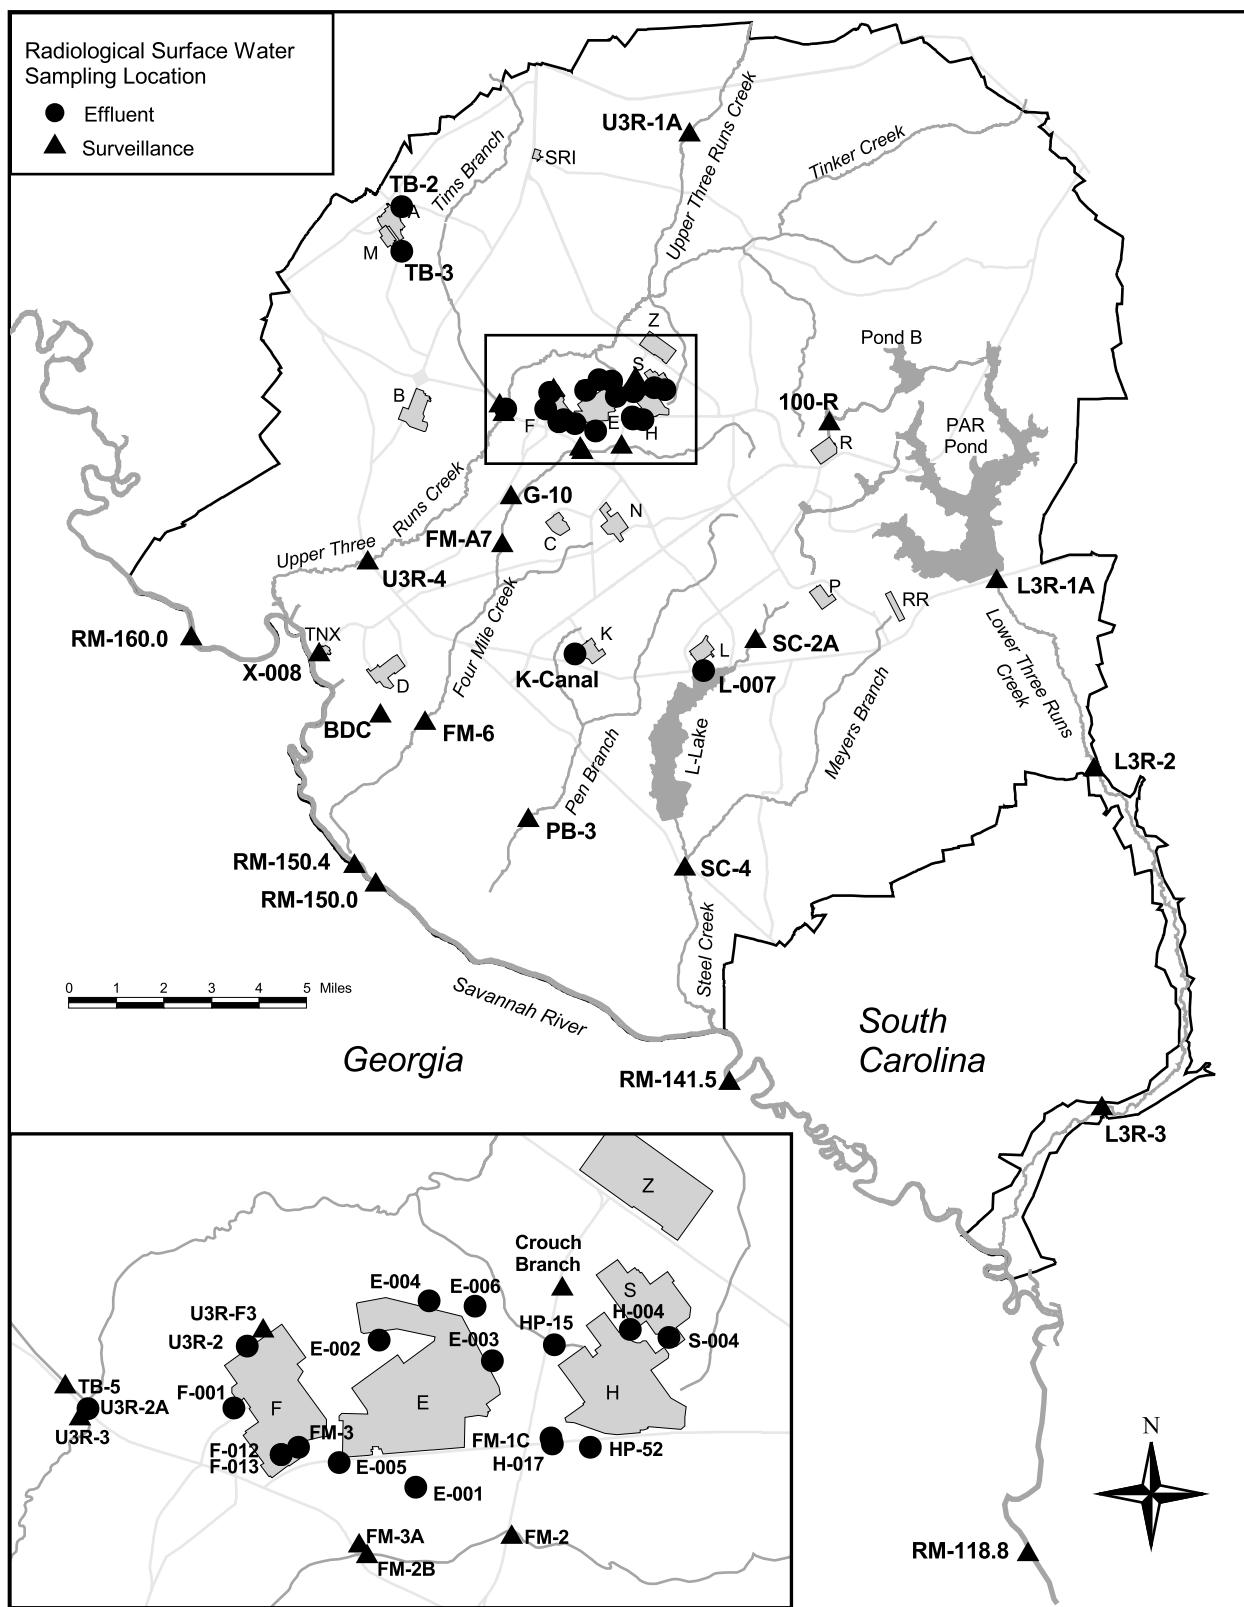


Figure 2 Radiological Surface Water Sampling Locations

Surveillance and effluent sampling points are near SRS facilities, on site streams, and on the Savannah River.


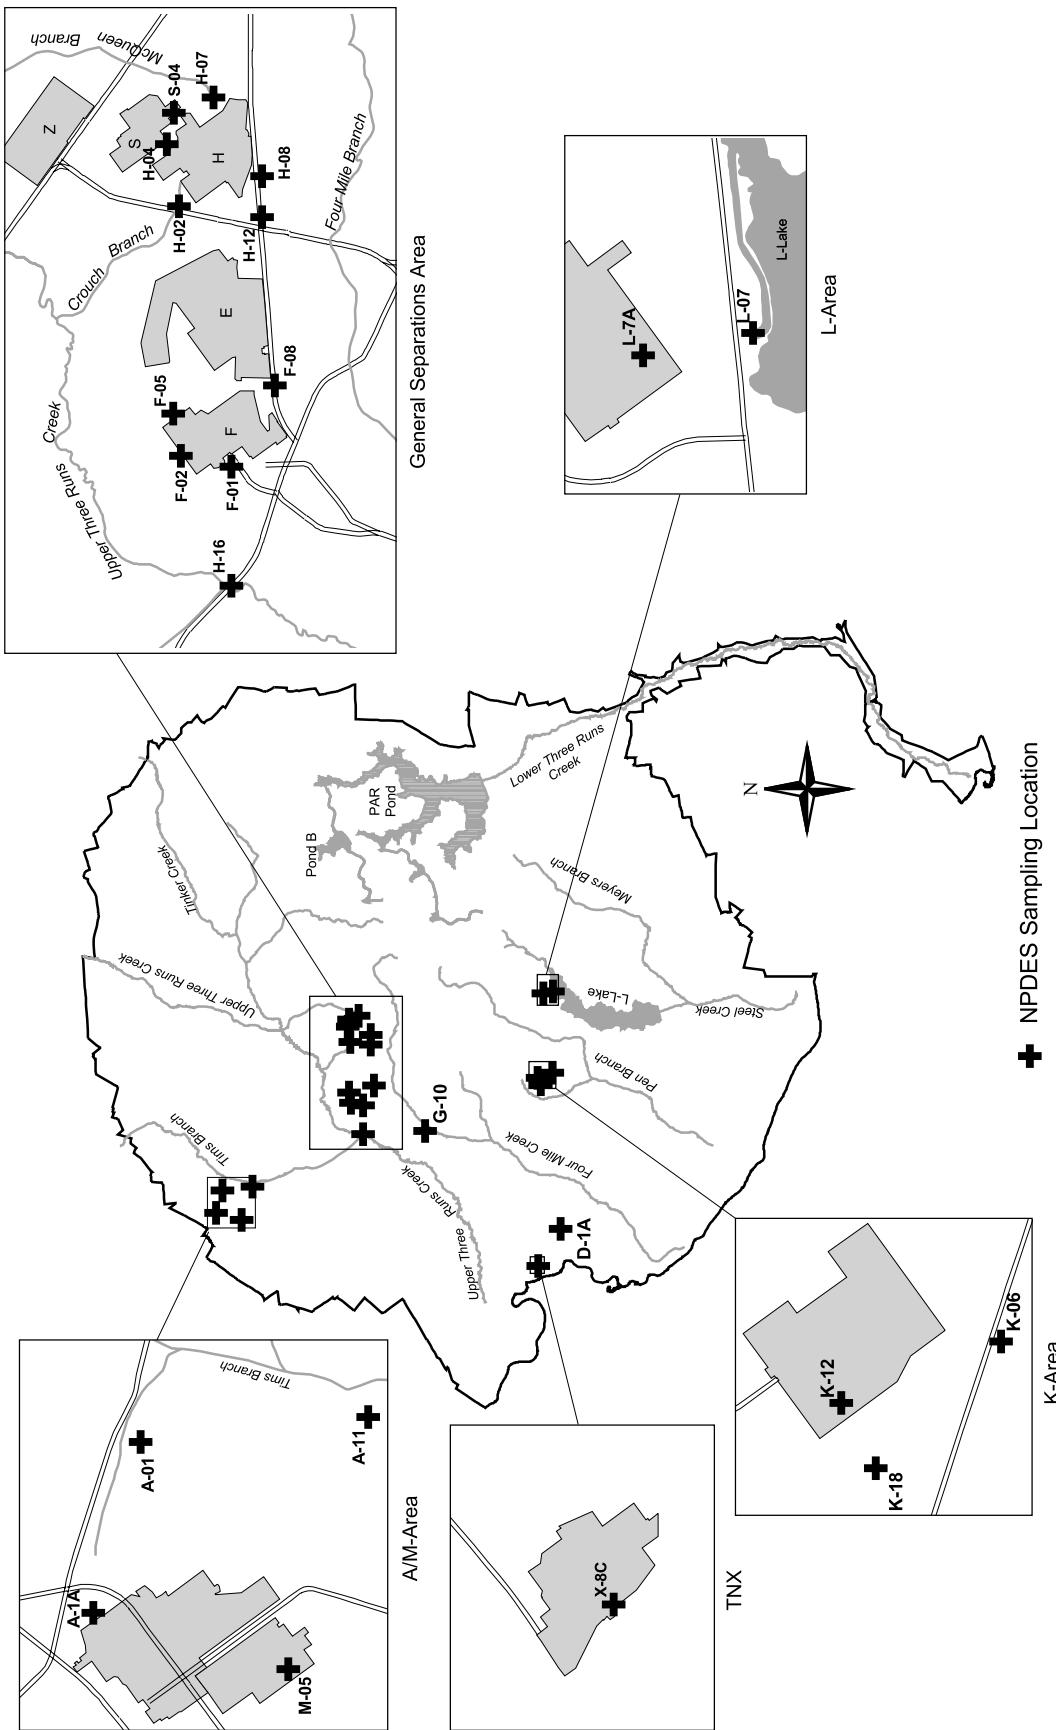


Figure 3 NPDES Sampling Locations
Twenty-three industrial wastewater outfalls were regulated at SRS in 2005 under NPDDES Permit SC00000175.


ESS/SRNL Map

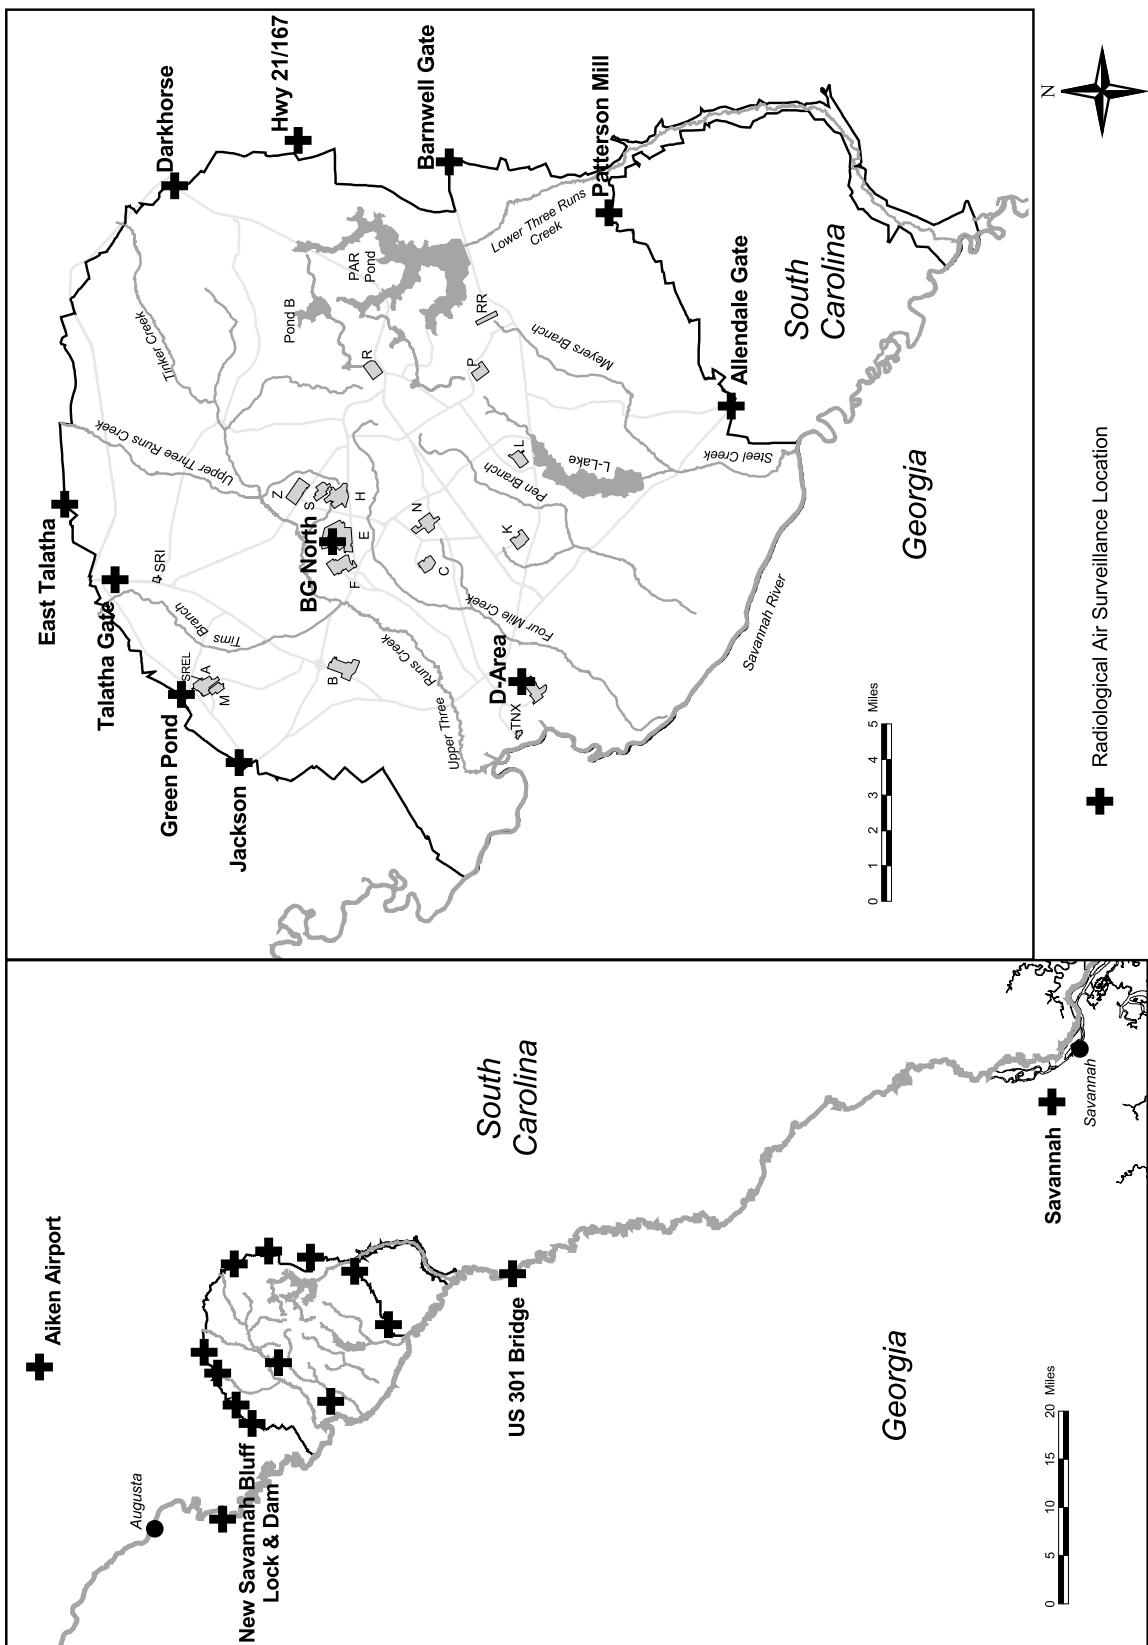

ESS/SRNL Map

Figure 4 Radiological Air Surveillance Sampling Locations

The SRS air surveillance program consists of 11 stations located on site or along the site perimeter, as well as three stations approximately 25 miles from the site perimeter (located near the U.S. Highway 301 Bridge over the Savannah River; near the New Savannah Bluff Lock and Dam, also known as the Augusta Lock and Dam; and at the Aiken airport) and one about 100 miles from the site perimeter (near Savannah, Georgia).

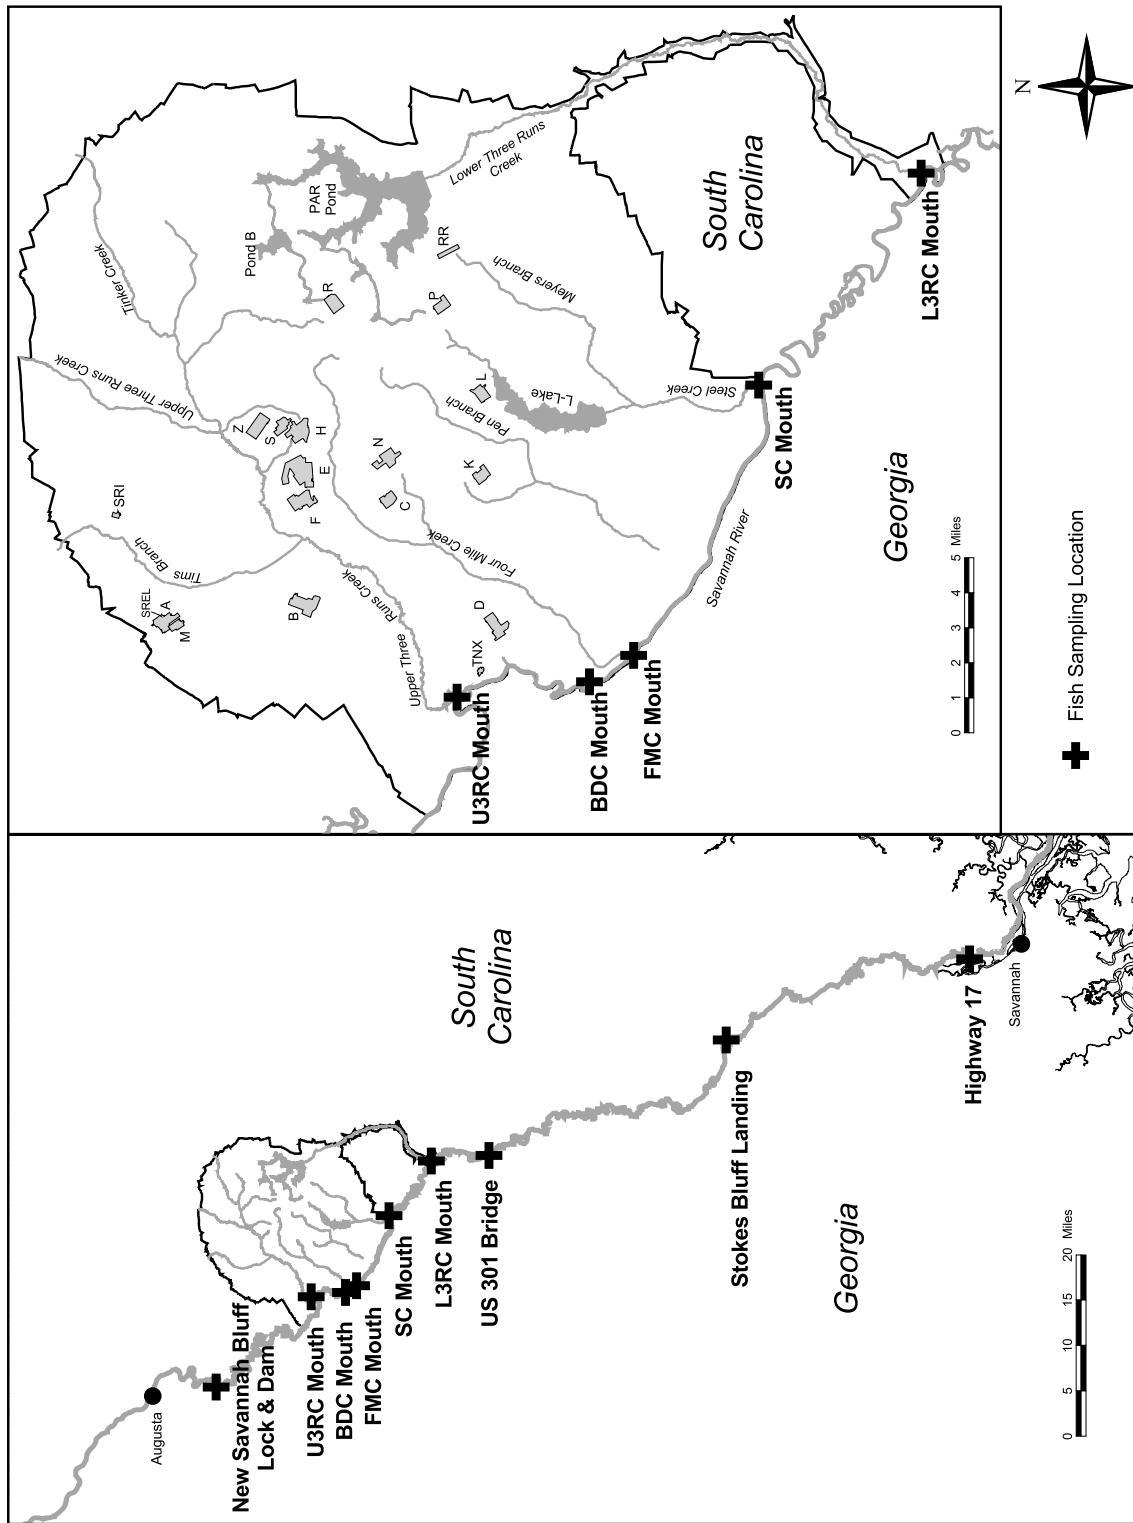

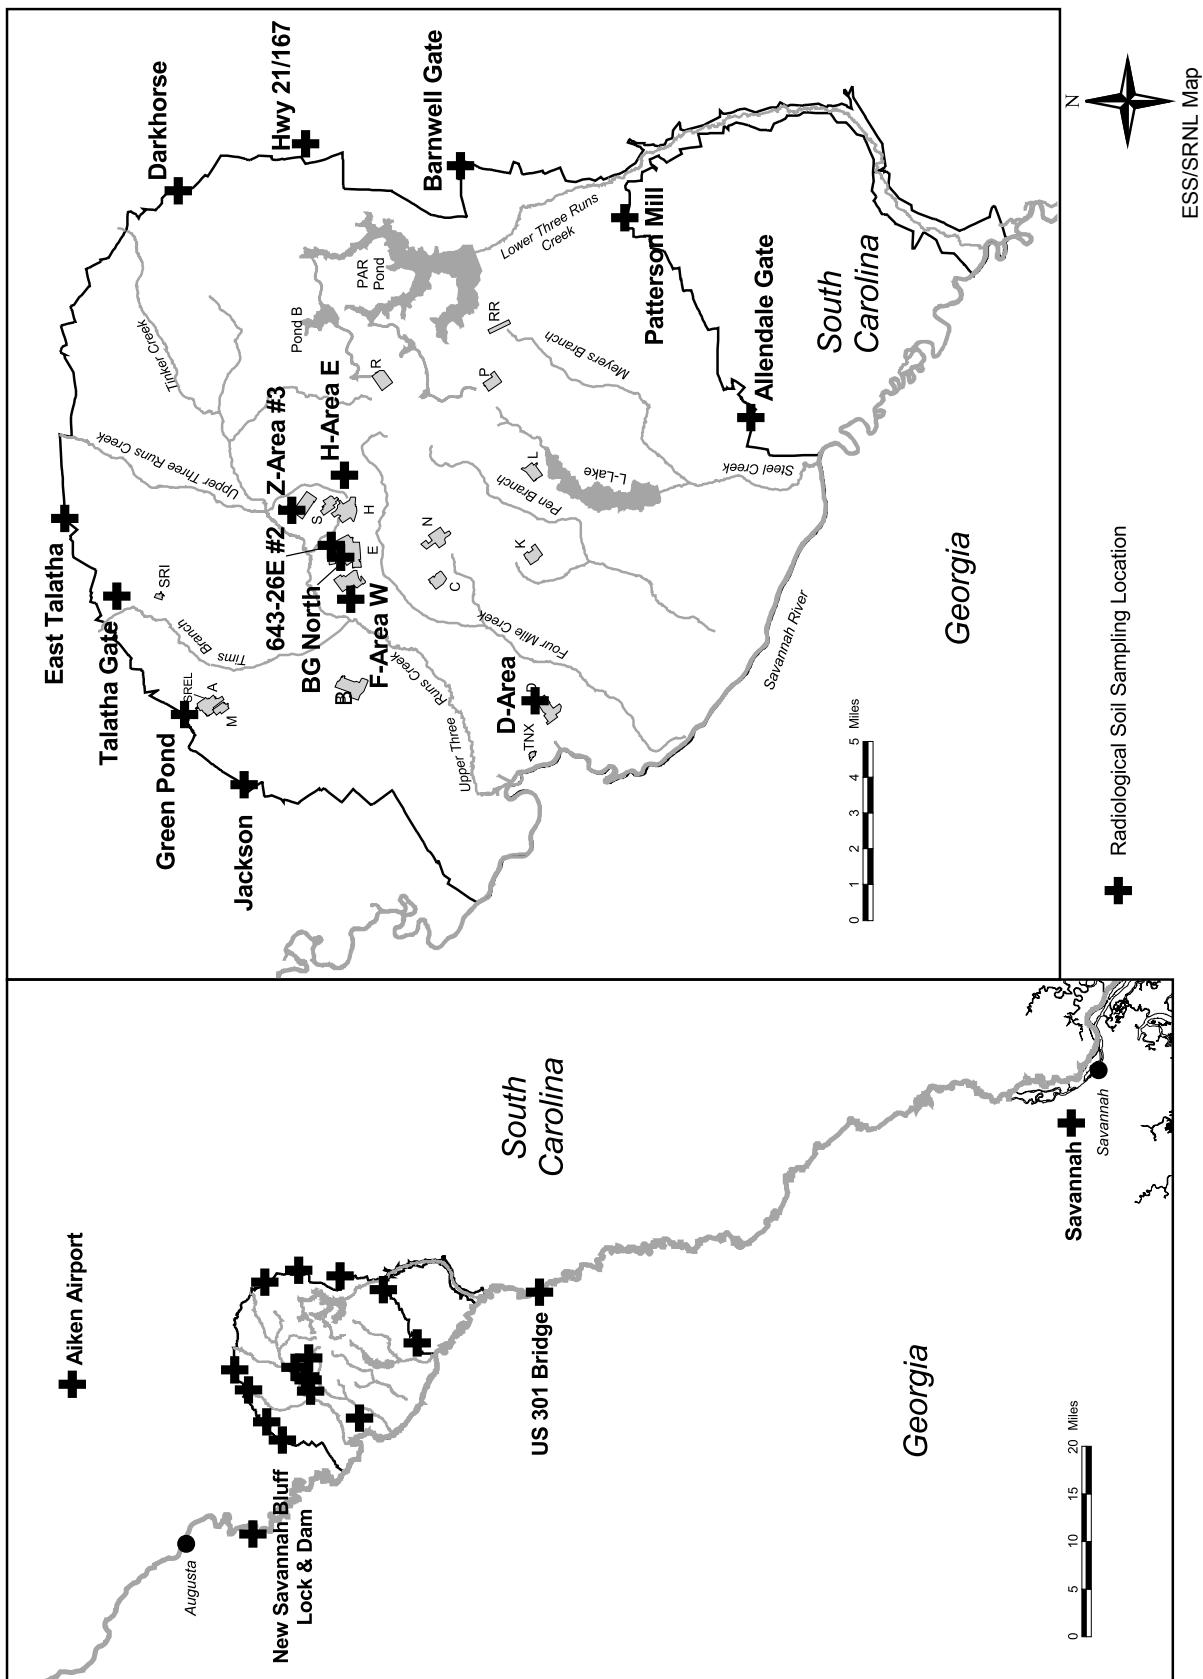
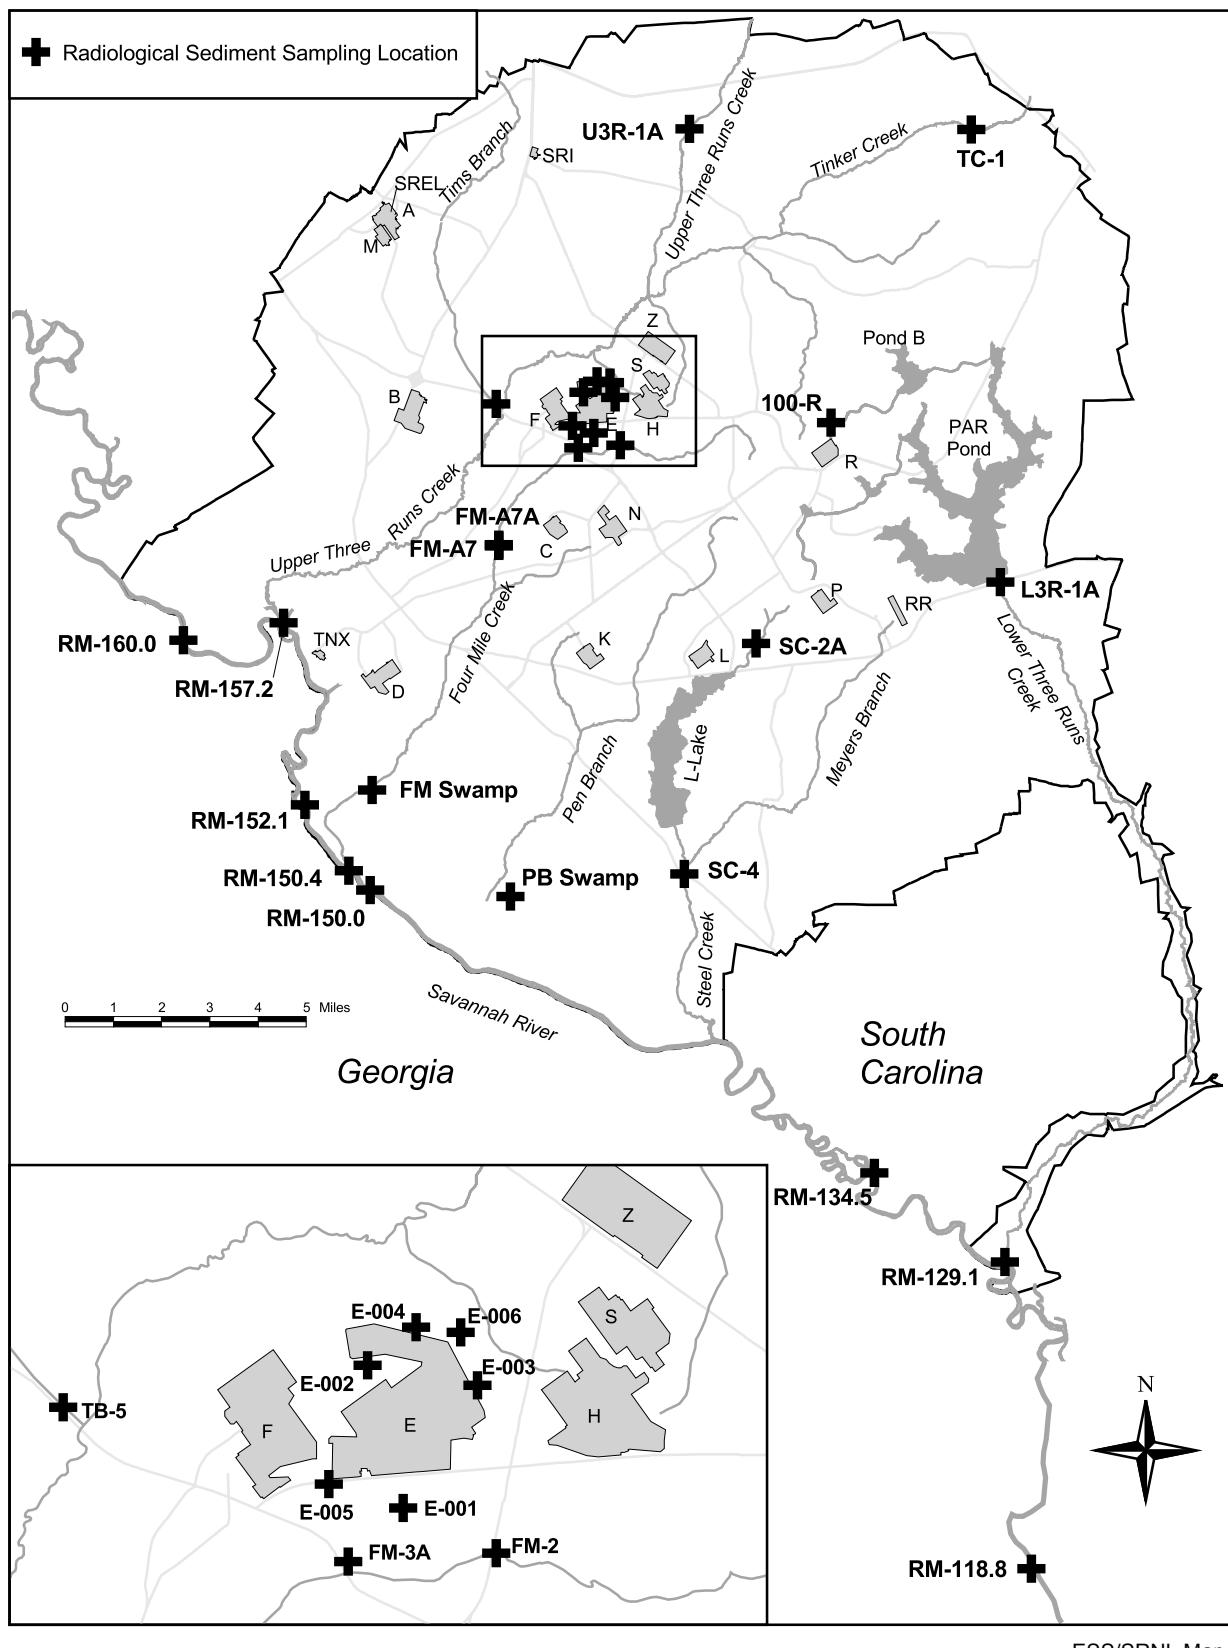


Figure 6 Radiological Soil Sampling Locations
SRS collected soil samples in 2005 from five onsite locations, 10 site perimeter locations, and four offsite locations.

**Figure 7 Radiological Sediment Sampling Locations**

Sediment samples were collected in 2005 at eight Savannah River locations—upriver of, adjacent to, and downriver of the site—and 19 onsite locations.


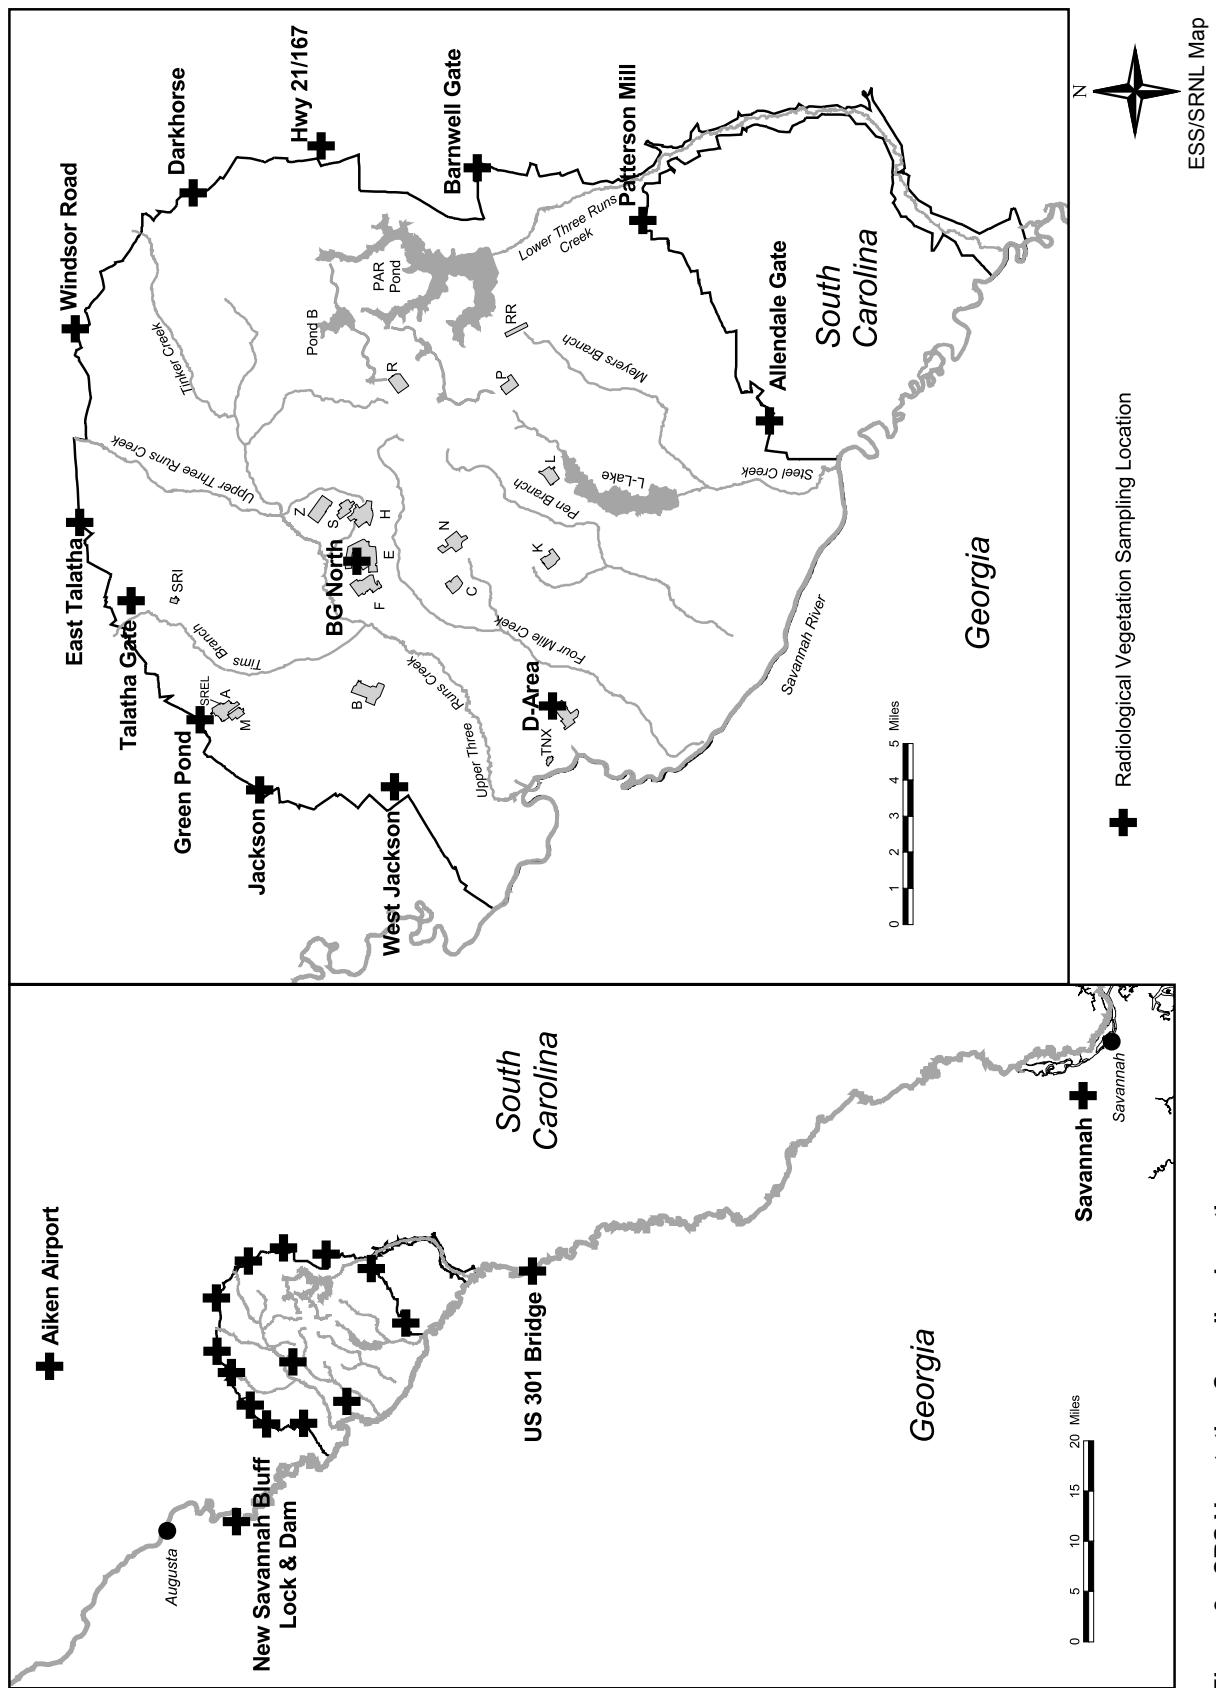


Figure 8 SRS Vegetation Sampling Locations
Vegetation samples were collected for radiological analysis in 2005 from 13 locations on site or along the site perimeter, and from four offsite locations.

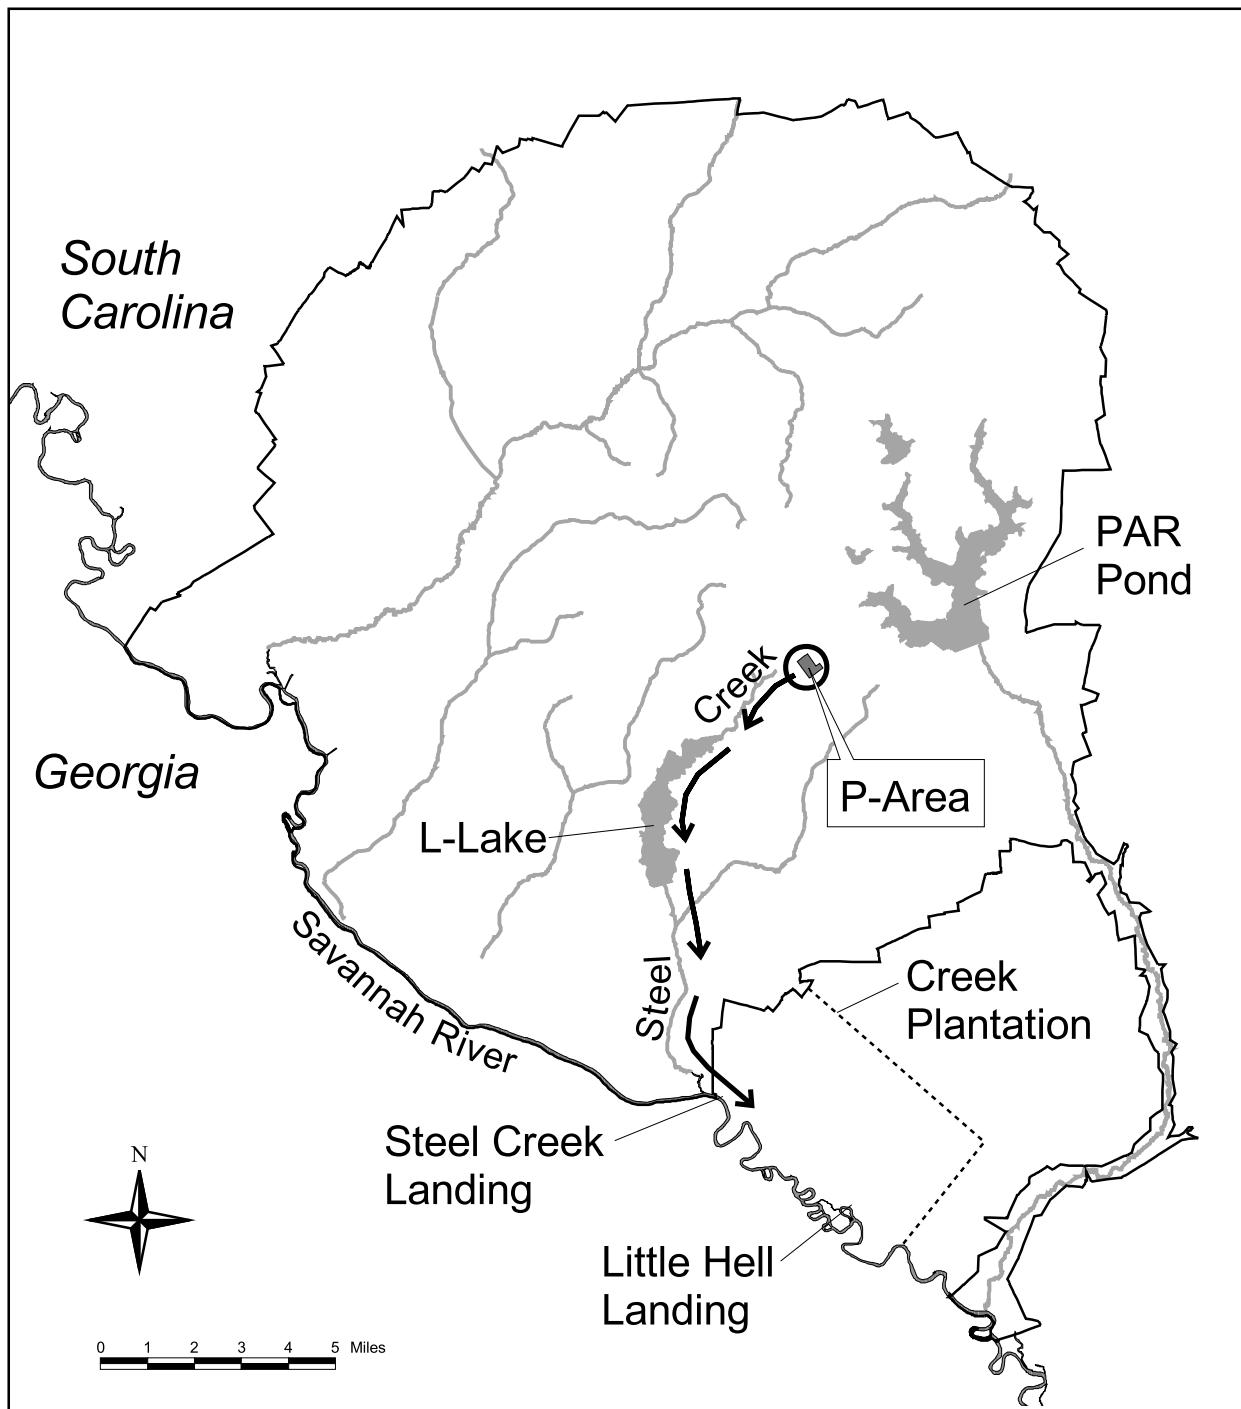

SRNL Map

Figure 9 Swamp Contamination

Radioactivity released from SRS operations contaminated the Savannah River Swamp between Steel Creek and Little Hell Landing—an area outside the SRS boundary—during the 1960s. Approximately 25 Ci of cesium-137 and 1 Ci of cobalt-60 were released from the P-Area storage basin to Steel Creek—L-Lake did not exist at the time of the release—and migrated downstream to a part of the swamp.

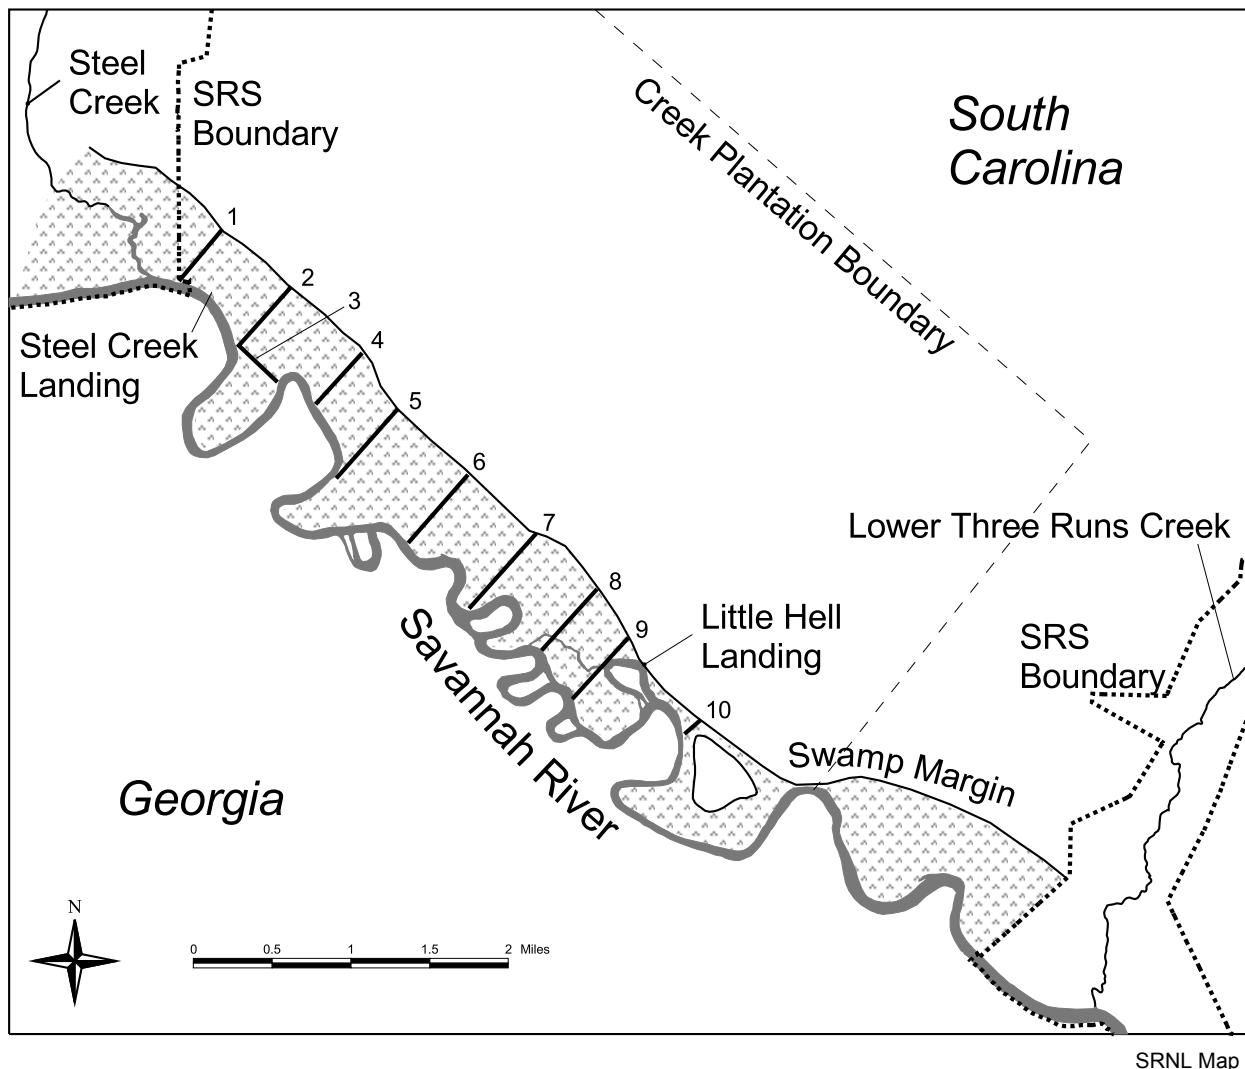
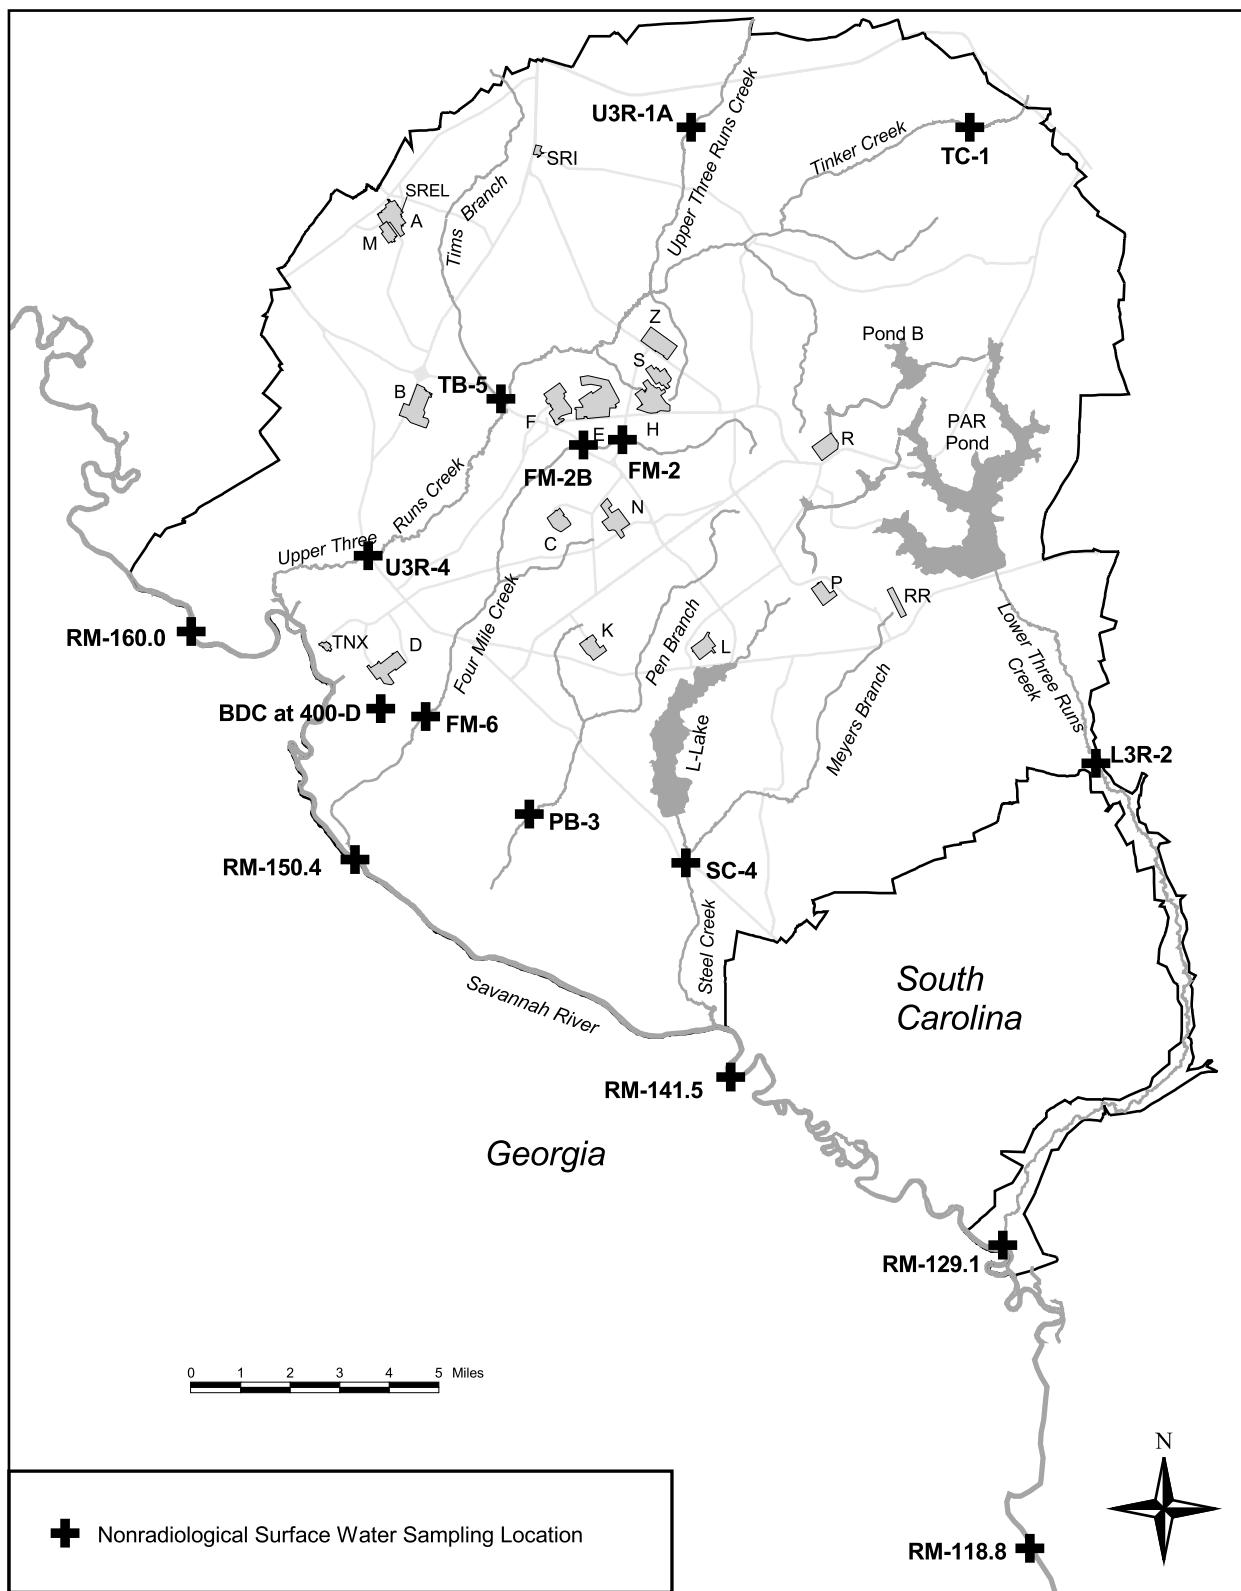


Figure 10 Savannah River Swamp Sampling Trails

Ten sampling trails were established in the Savannah River Swamp in 1974 so that surveys could be conducted on the movement of contamination from SRS operations.

**Figure 11 Nonradiological Surface Water Sampling Locations**

Surface water samples are collected from five Savannah River and 11 SRS stream locations and are analyzed for various chemical and physical properties.

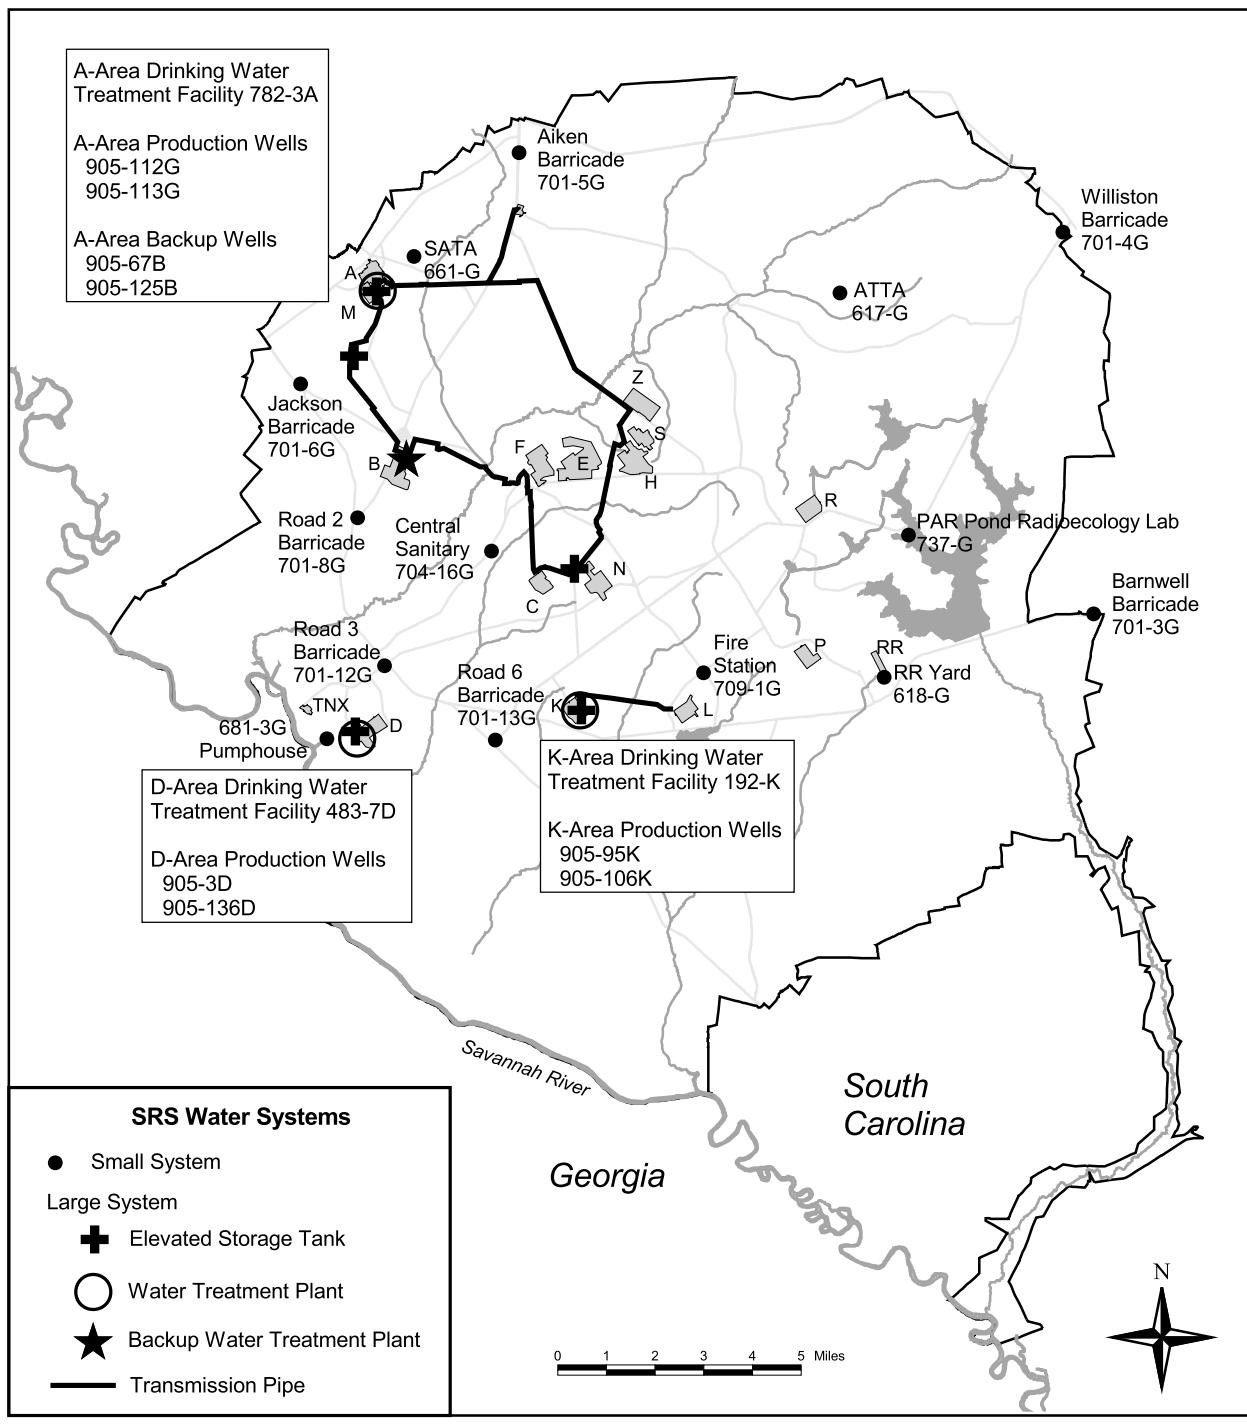
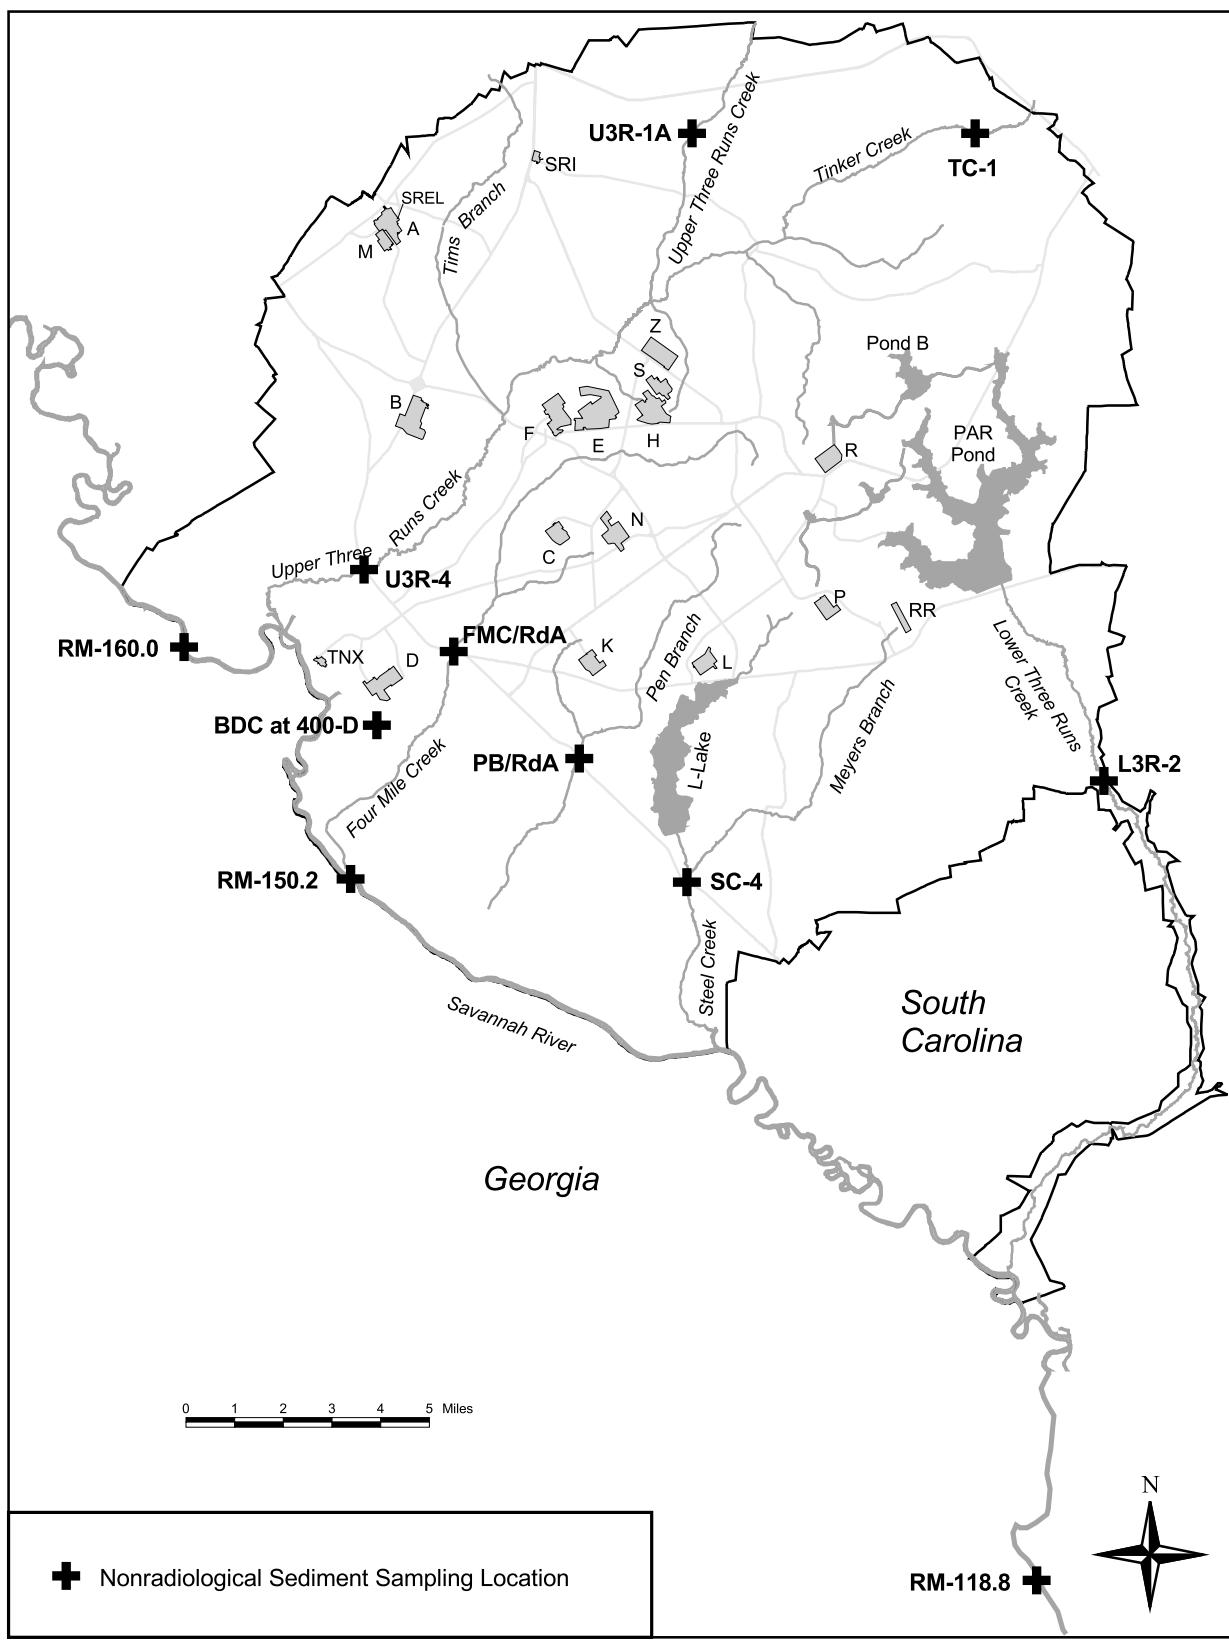


Figure 12 Domestic Water Systems

Most of the drinking water at SRS is supplied by three “large” systems. The site also has 14 “small” domestic water facilities, which serve populations of fewer than 25 persons and require a reduced level of regulatory oversight. The three larger systems have transmission pipes, elevated storage tanks, water treatment plants, and a backup water treatment plant.

**Figure 13 Nonradiological Sediment Sampling Locations**

Sediment samples are collected at eight onsite stream locations and three Savannah River locations. The samples are analyzed for various inorganic contaminants (metals) and pesticides/herbicides.

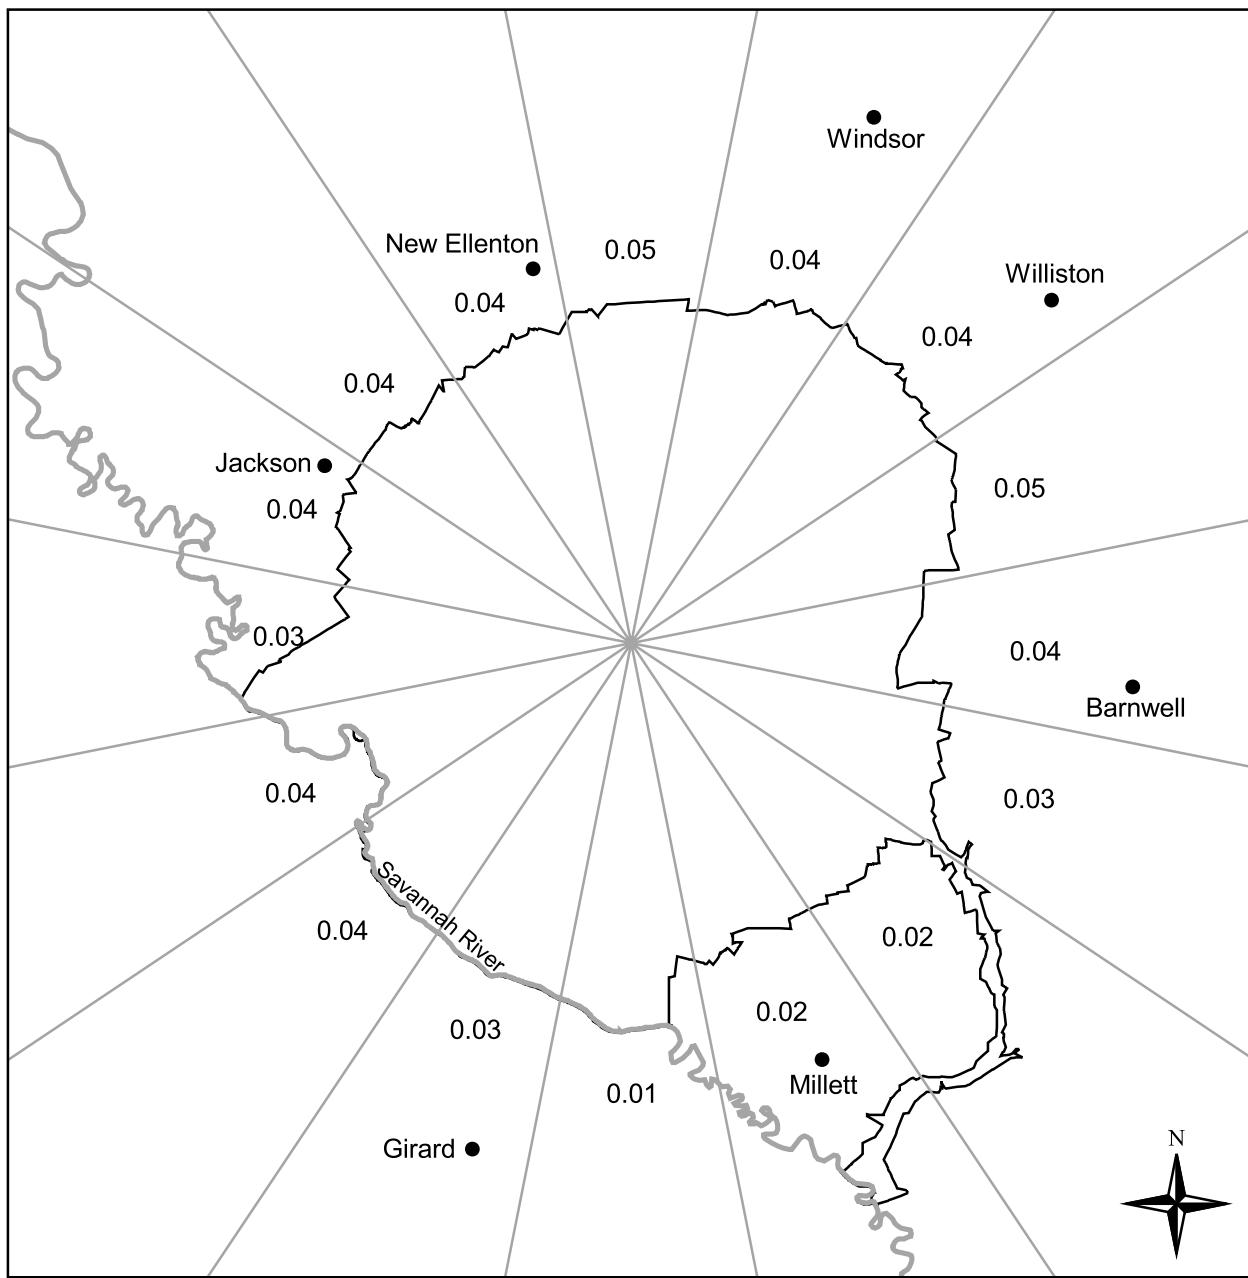
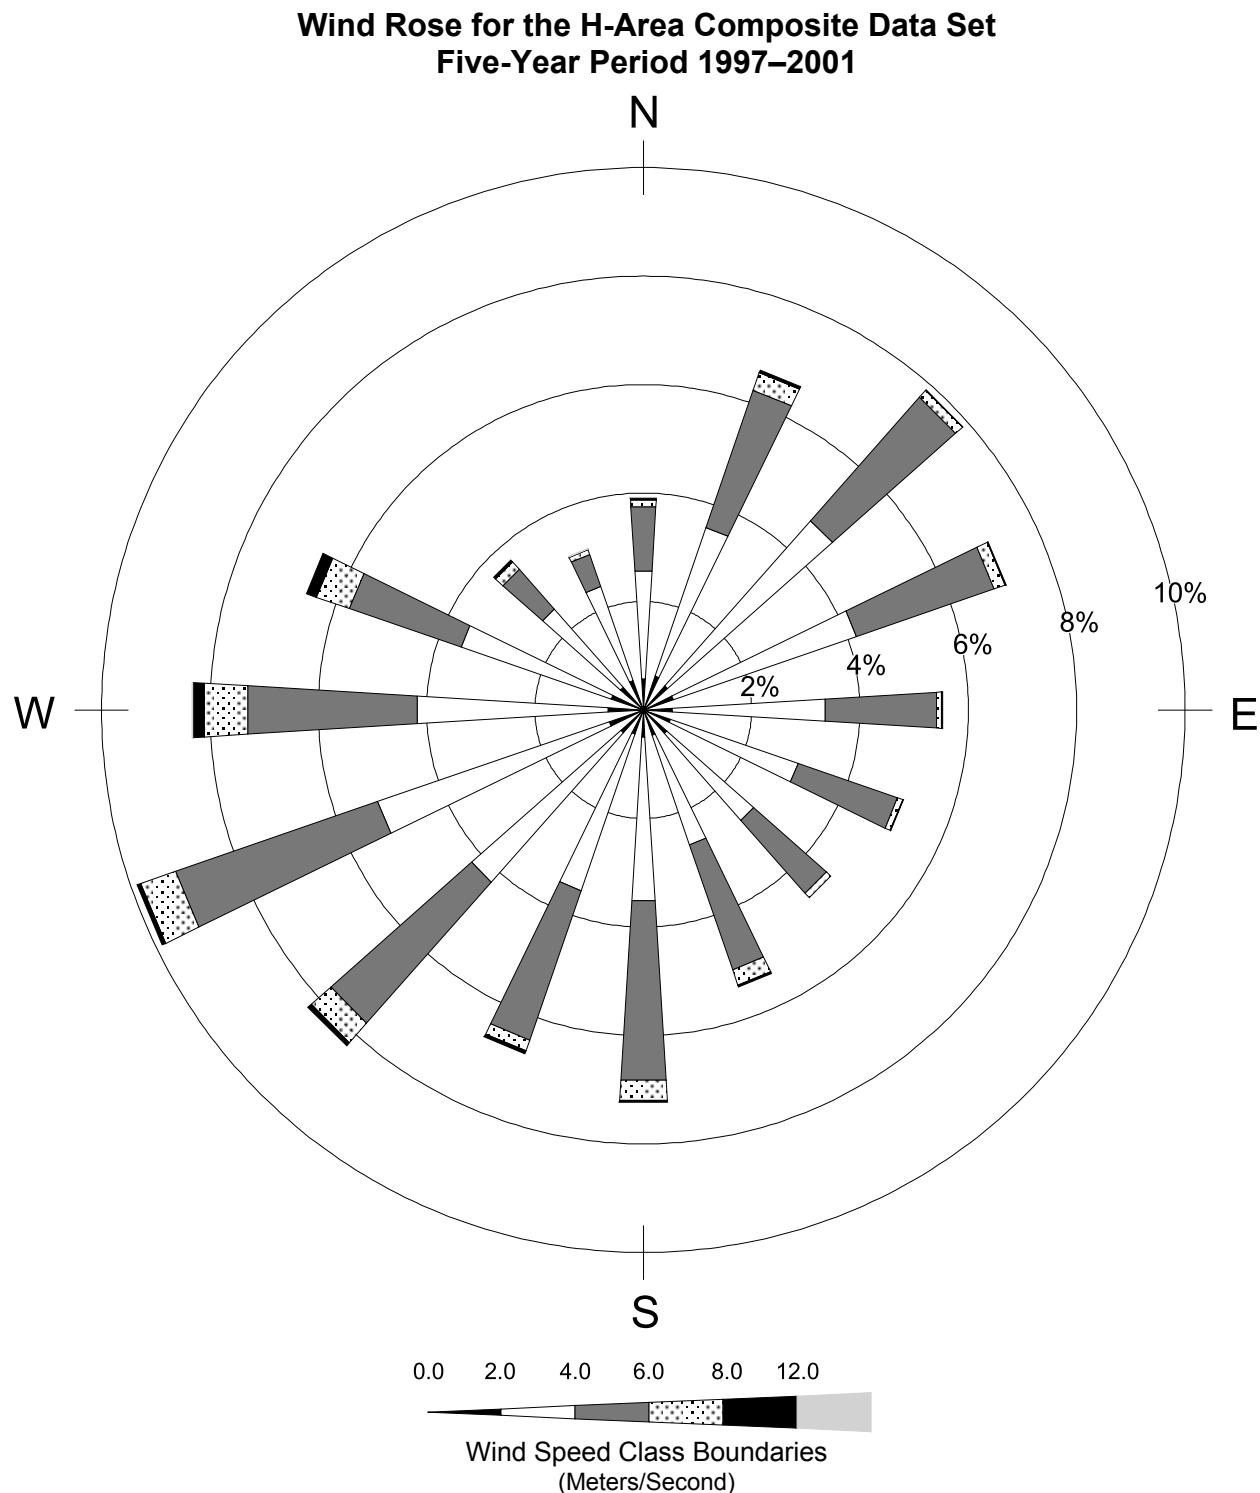


Figure 14 Sector-Specific Adult Maximally Exposed Individual Air Pathway Doses (in mrem) for 2005
 Maximally exposed individual (MEI) site boundary doses from airborne releases are shown for each of the 16 major compass point directions surrounding SRS. In 2005, the N and ENE sectors had essentially the same MEI dose of 0.05 mrem. However, when the third decimal point was considered, the N sector was slightly higher than the ENE sector.

**Figure 15 Wind Rose for SRS, 1997–2001**

This wind rose graphically depicts the percent of occurrence frequencies of six wind speed categories by 16 cardinal wind direction sectors at SRS. The wind speed categories are defined on the plot; direction is defined as the sector *from* which the wind blows. The data used to generate the wind rose consist of hourly averages of wind speed and direction at the H-Area meteorological tower for the 5-year period 1997–2001; measurements were taken 200 feet above the ground.

SRNL Atmospheric Technologies Graphic

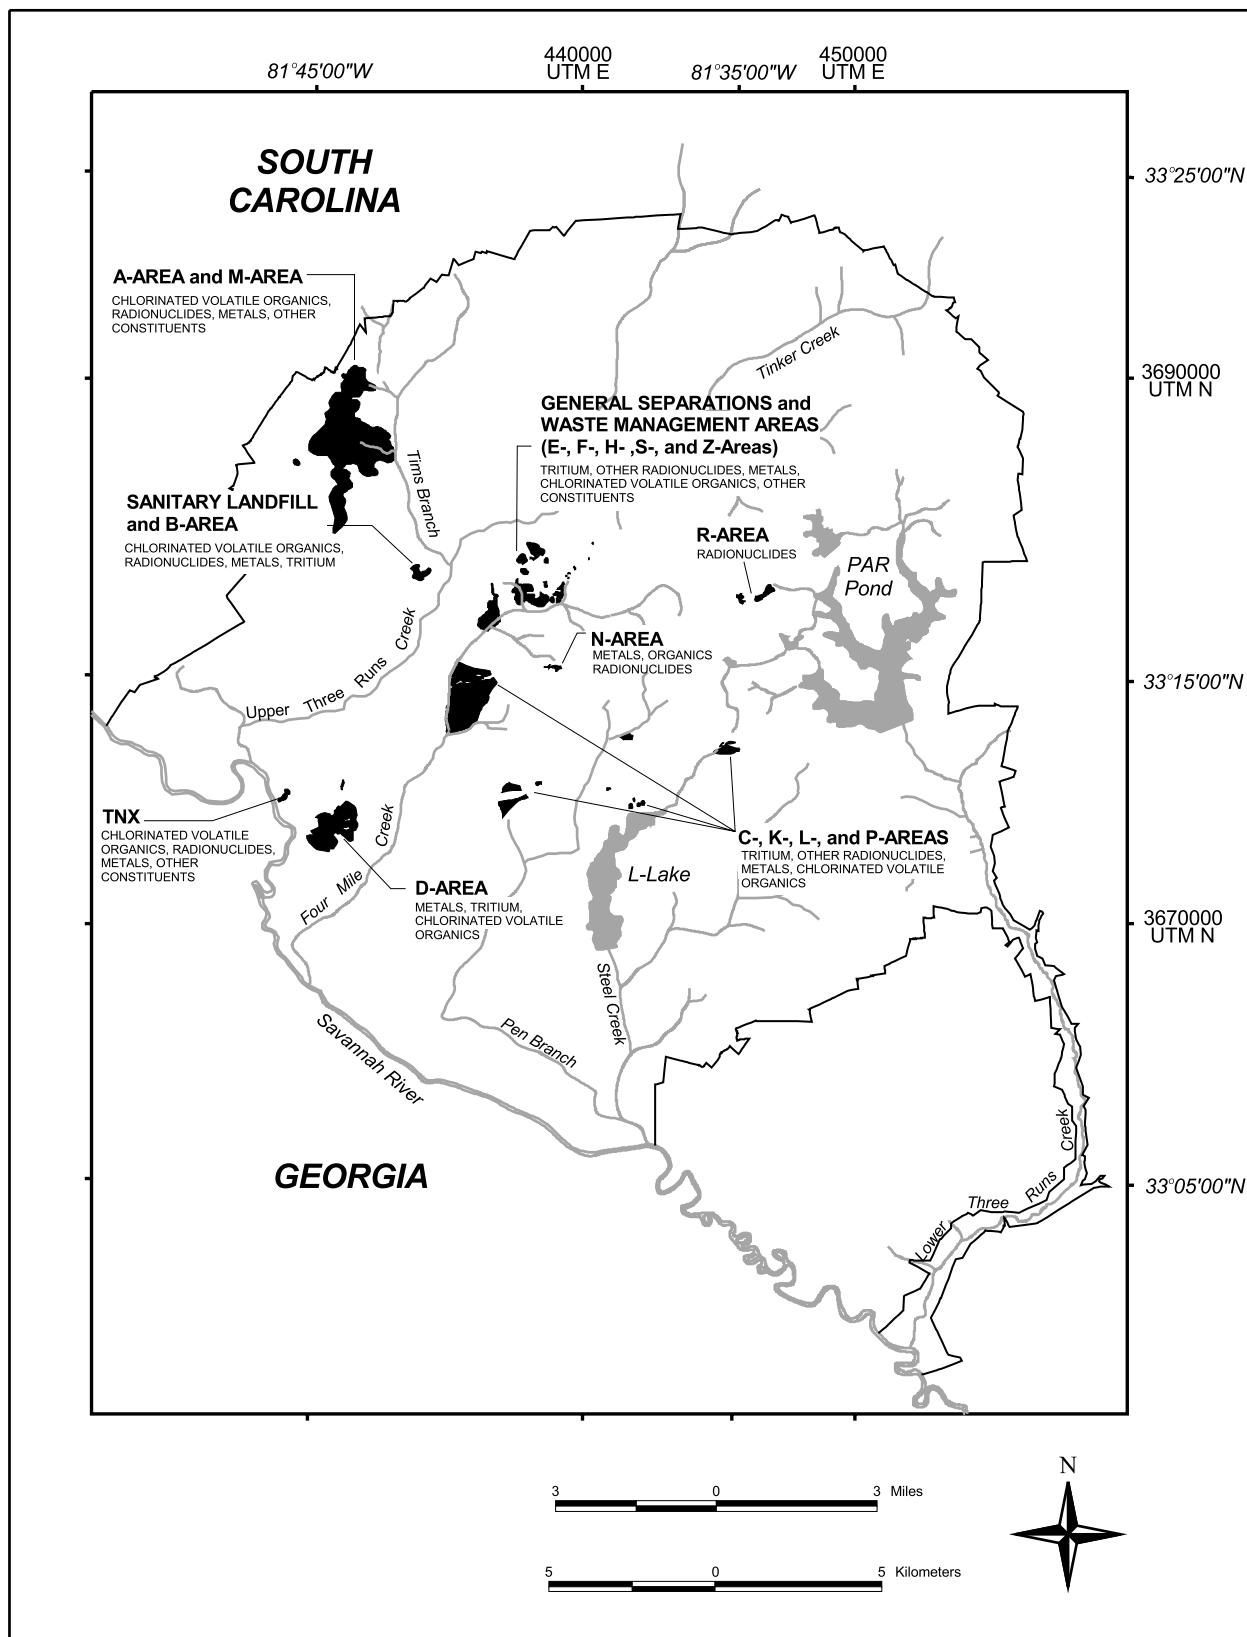
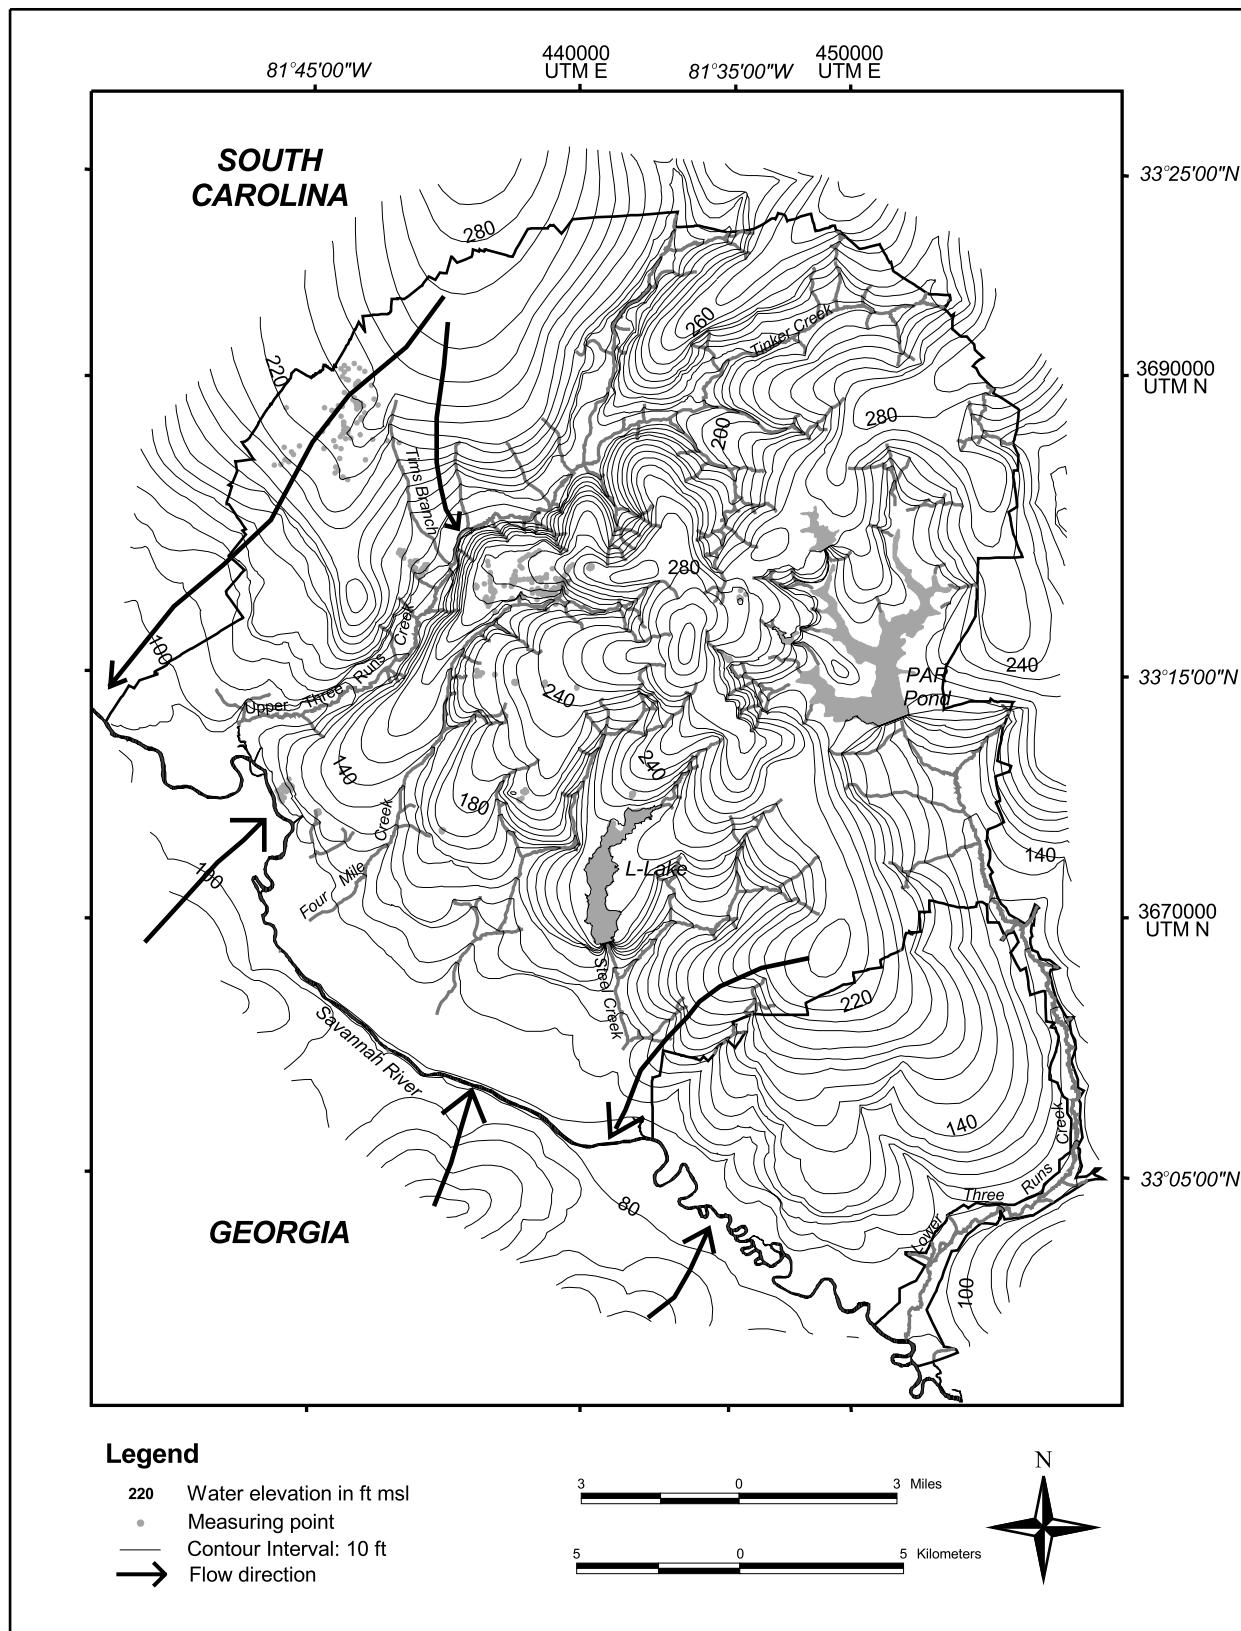


Figure 16 Facilities Monitored by the SRS Monitoring Well Network; Shaded Areas Indicate Extent of Groundwater Contamination.



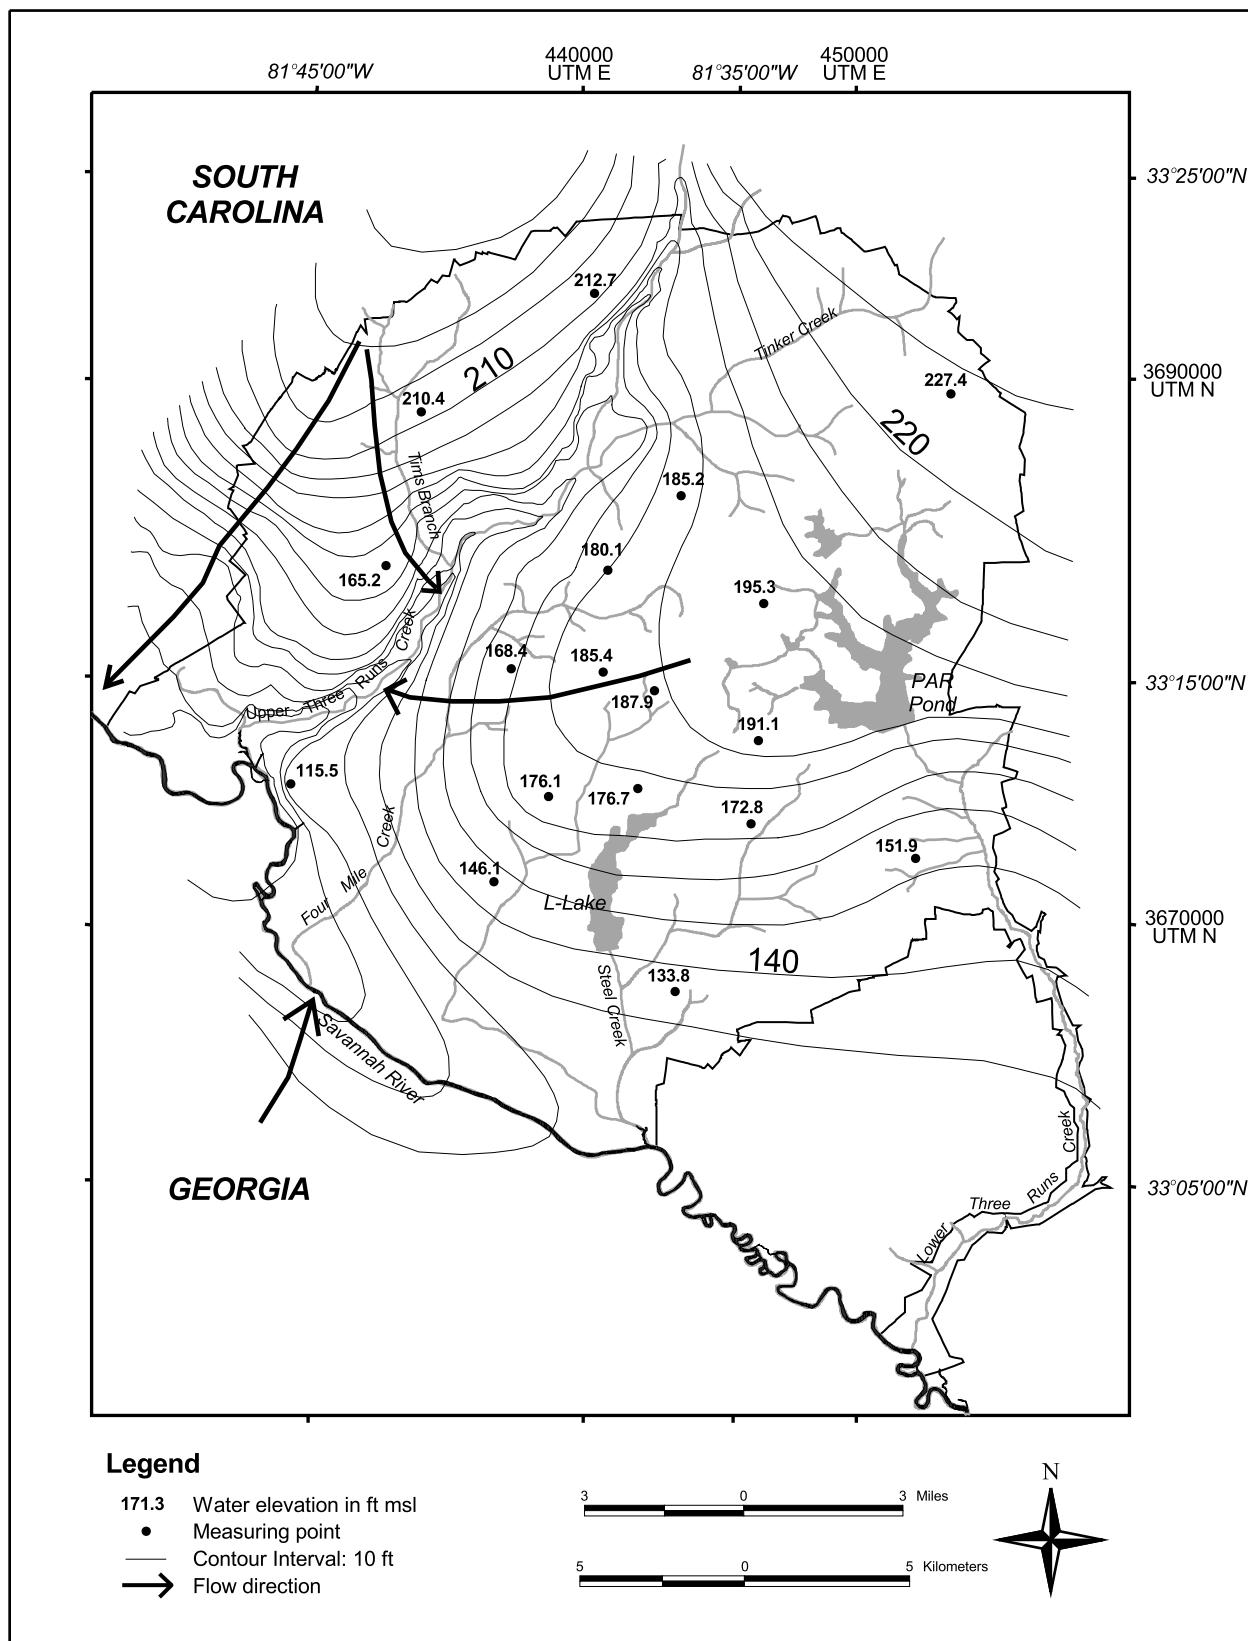


Figure 18 Potentiometric Surface of the Gordon Aquifer at SRS

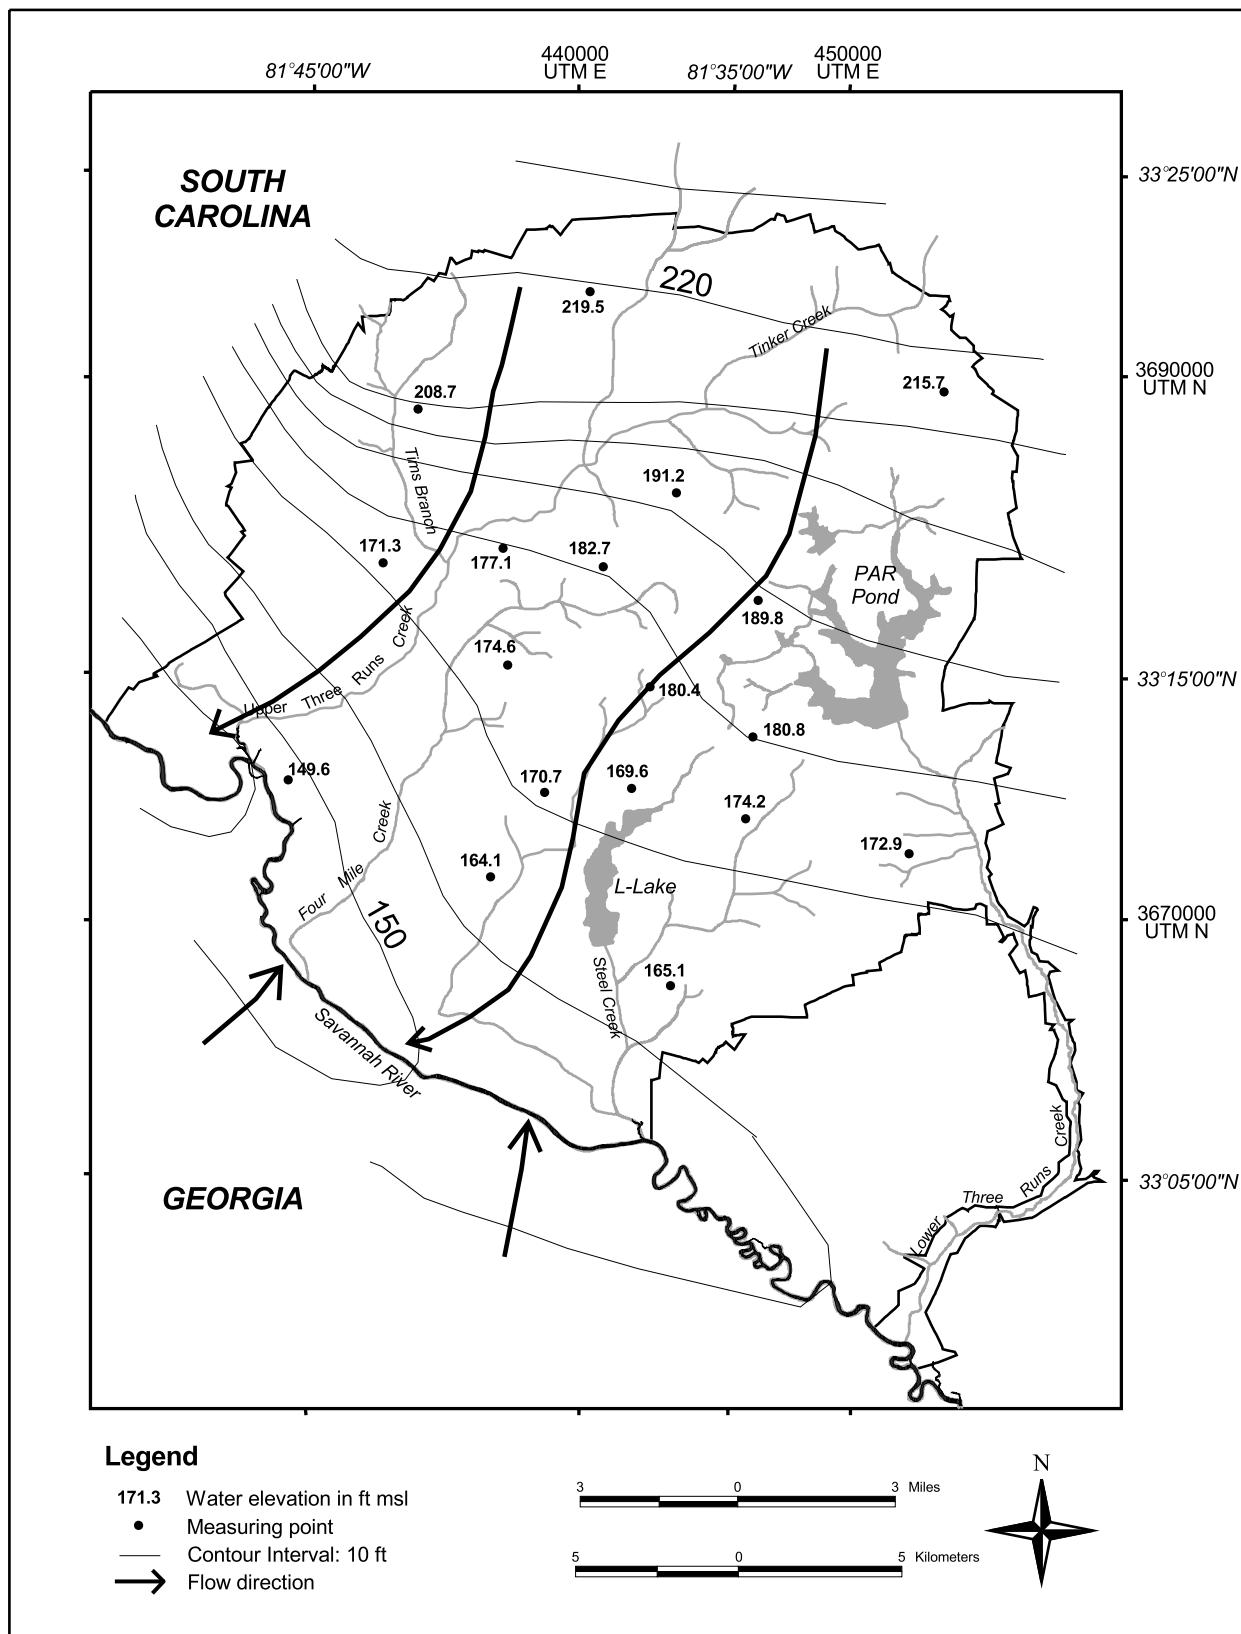


Figure 19 Potentiometric Surface of the Crouch Branch Aquifer at SRS

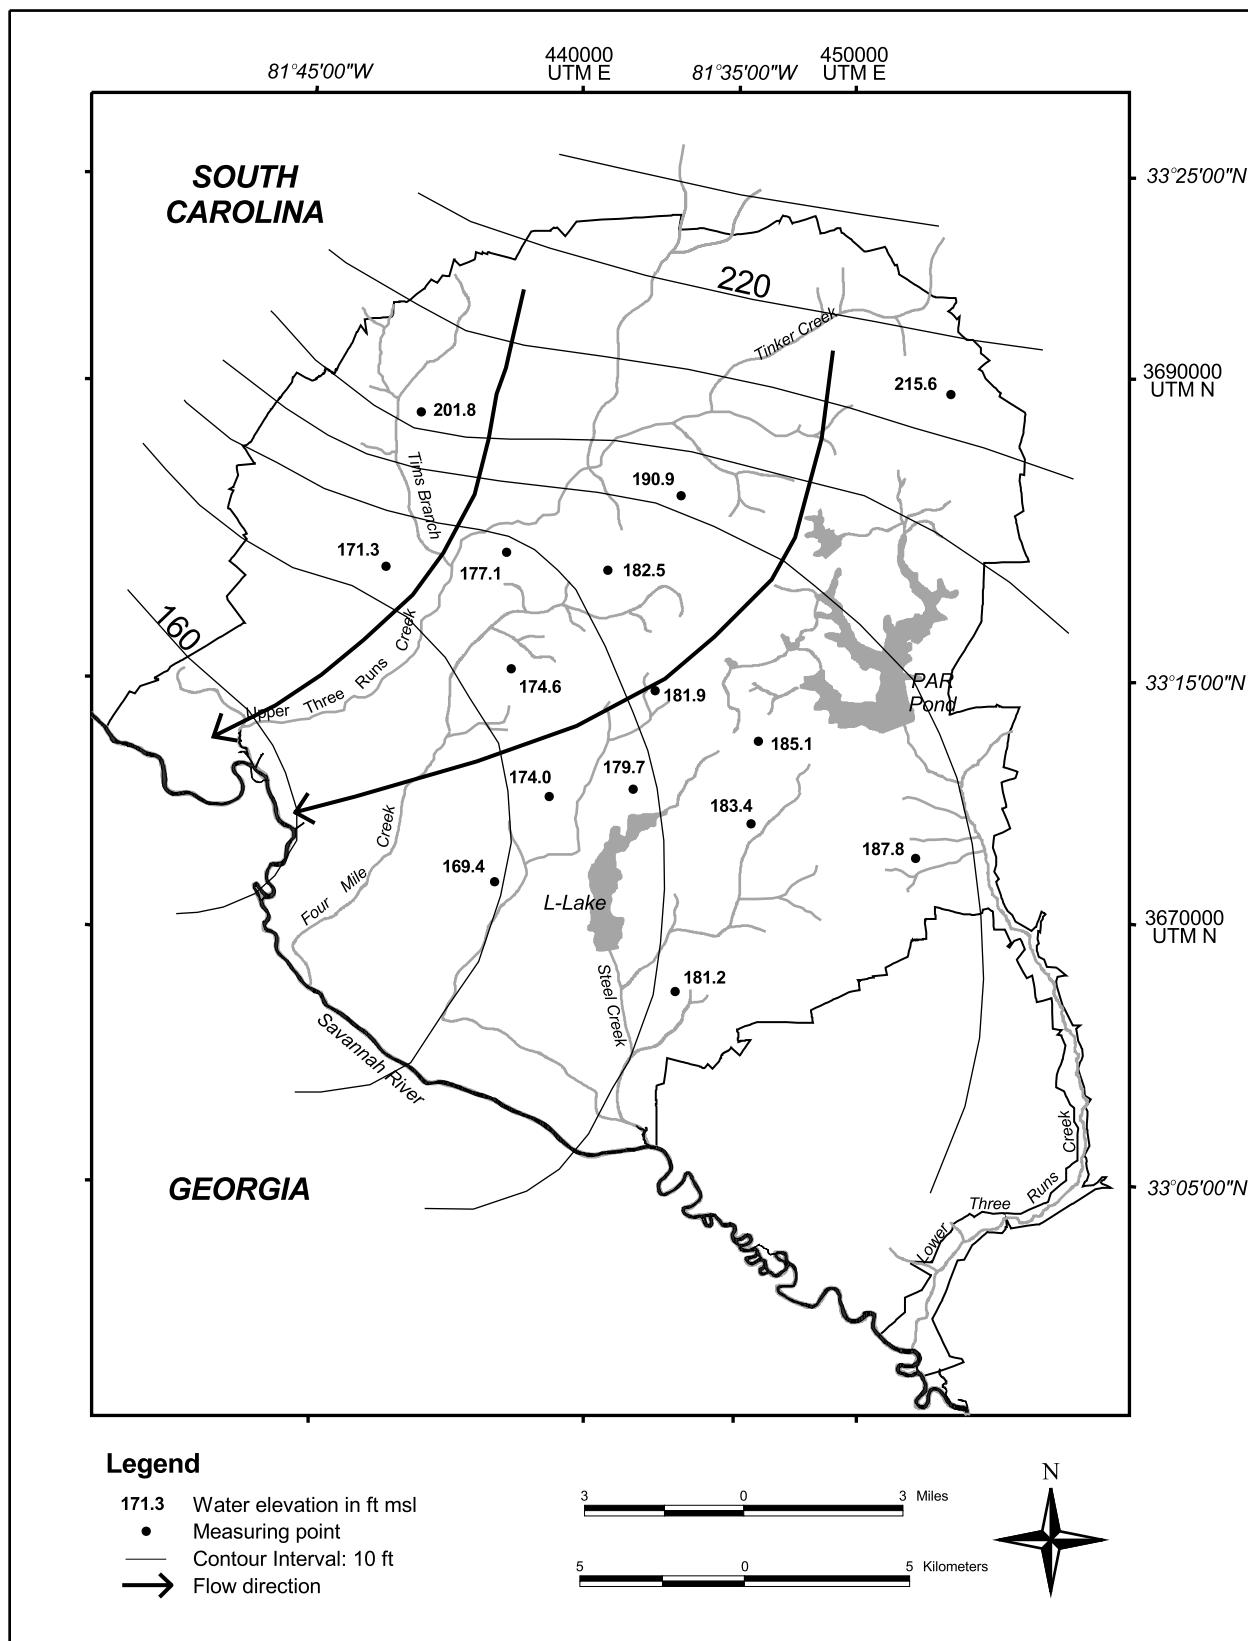


Figure 20 Potentiometric Surface of the McQueen Branch Aquifer at SRS

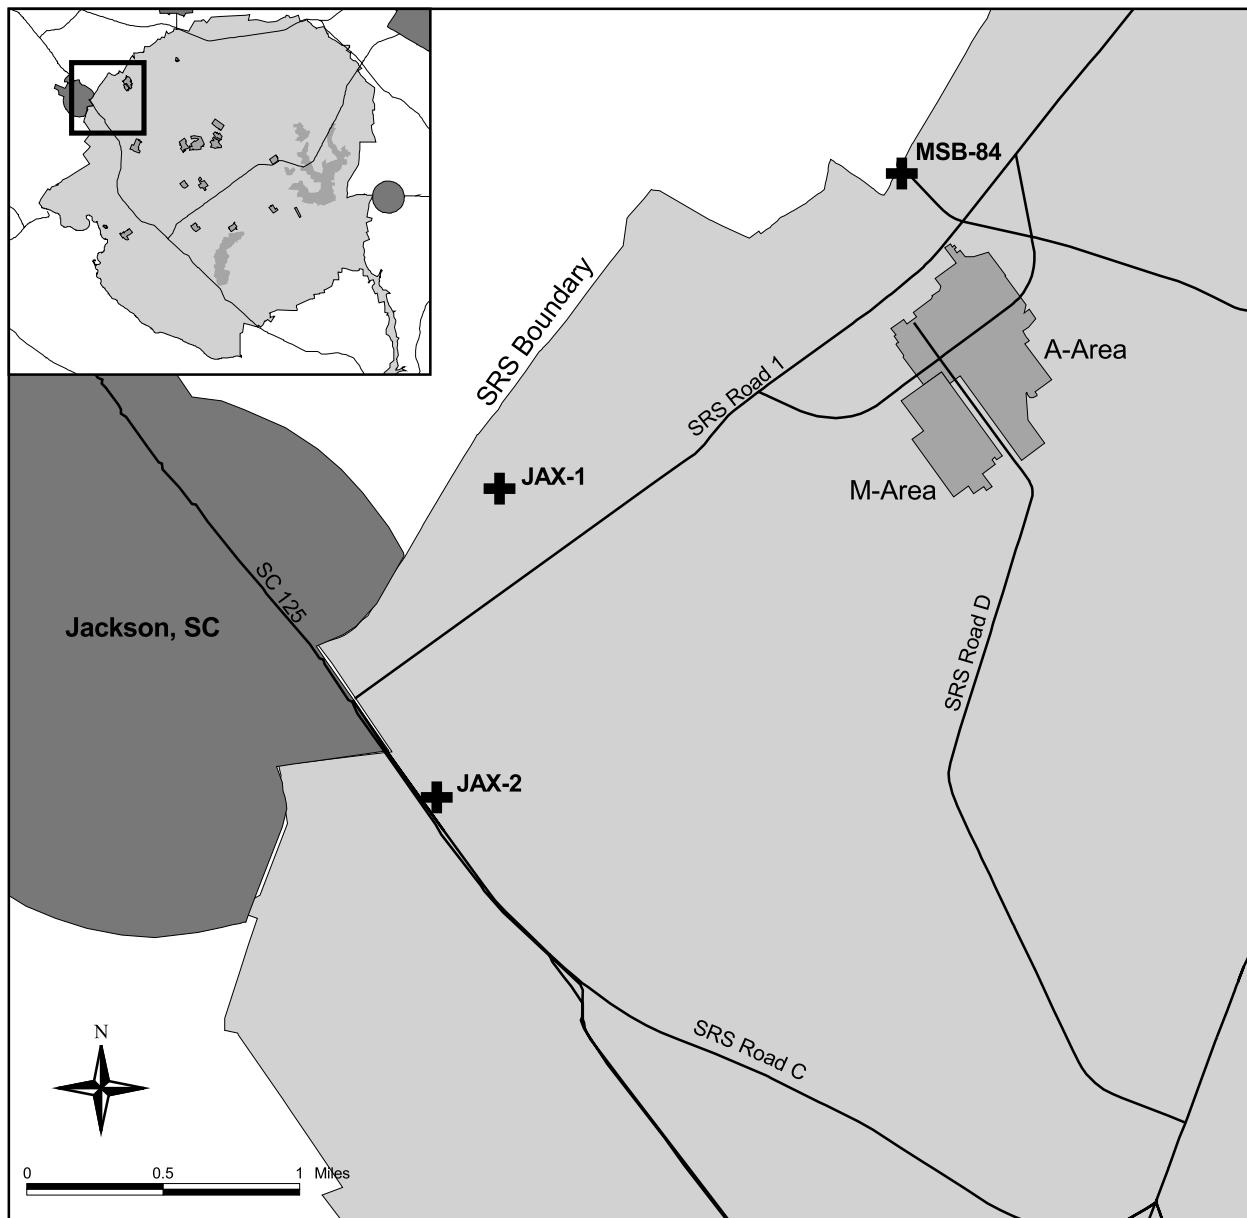


Figure 21 Wells Along Site Boundary Between A-Area/M-Area and Jackson, South Carolina (Nearest Population Center)

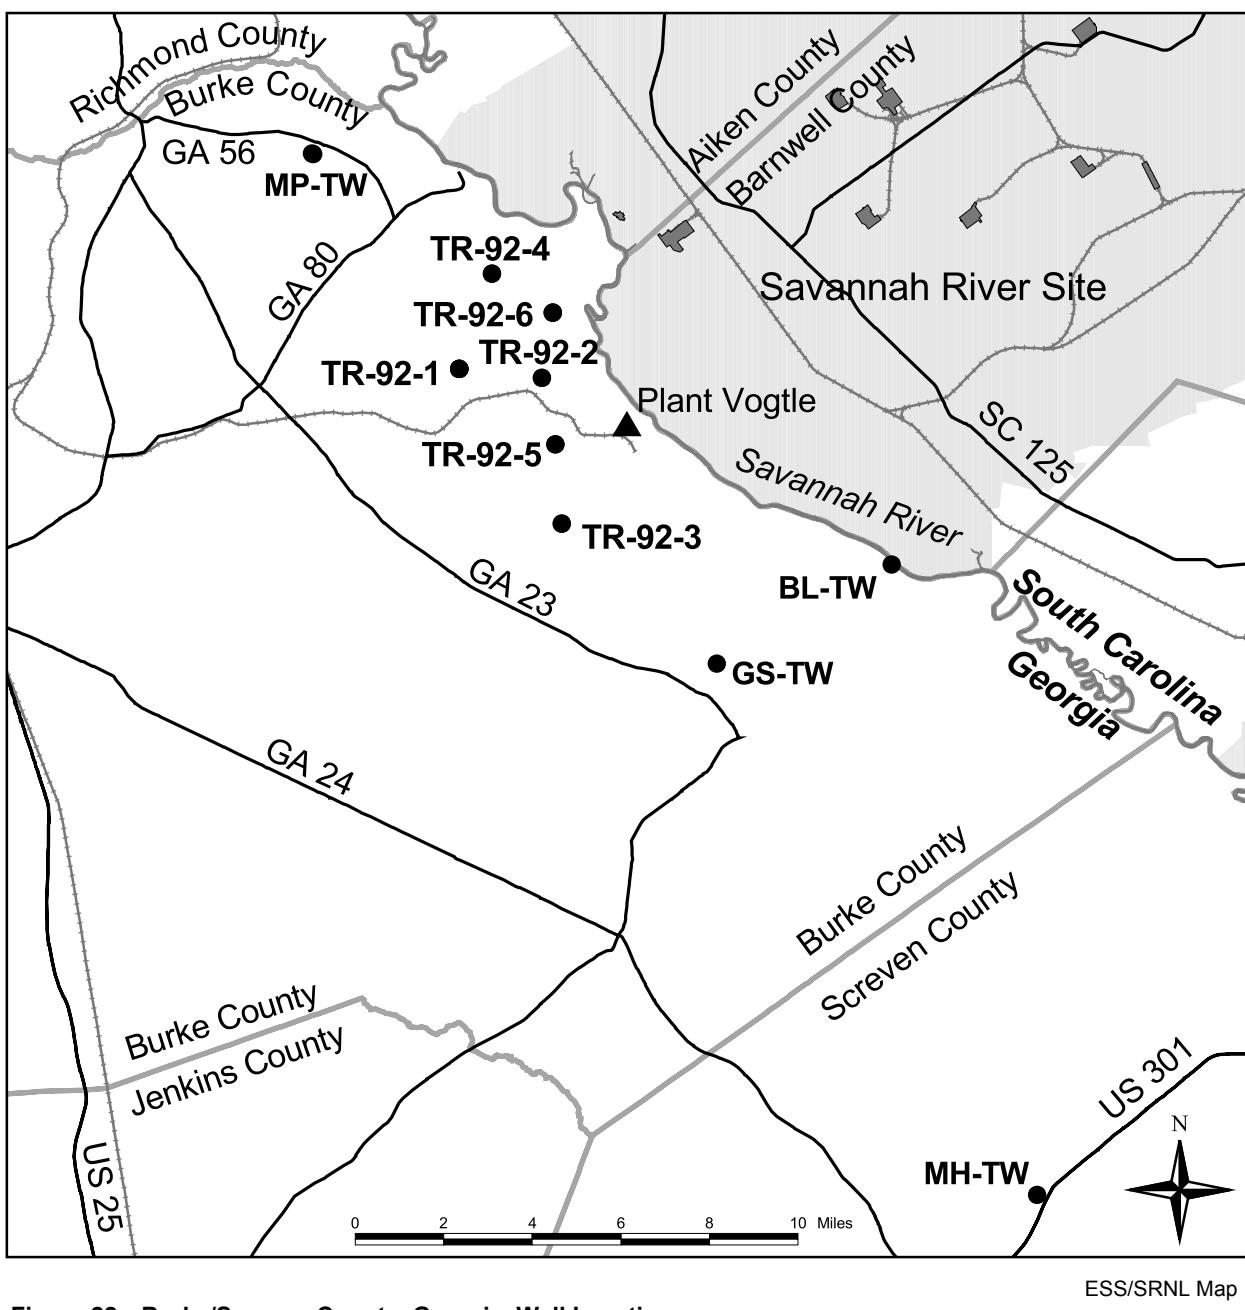


Figure 22 Burke/Screven County, Georgia, Well Locations

ESS/SRNL Map