

Presentation to the SRS Citizens Advisory Board

Alternative Storage of Vitrified Waste Canisters: Canister Interim Storage Project (CISP)

July 24, 2012

closure

Jean M. Ridley, P.E. Federal Project Director DOE-SR/AMWDP



Acronyms

- > CISP Canister Interim Storage Project
- > CISC Canister Interim Storage Container
- CISCC Canister Interim Storage Container Carrier
- CTS Canister Transfer Station
- DWPF Defense Waste Processing Facility
- GWSB Glass Waste Storage Building
- > SCT- Shielded Canister Transporter
- SRS Savannah River Site

 Environmental Management

 safety * performance * cleanup * closure www.em.doe.gov

Purpose

- Discuss storage of vitrified high level waste canisters produced by the Defense Waste Processing Facility (DWPF)
- Discuss the most promising storage alternative to a Glass Waste Storage Building
- > To fulfill the Waste Management Committee 2012 Work Plan topic



Background

- Additional storage for vitrified high level waste canisters is needed by December 2016.
- ➤ A 3rd Glass Waste Storage Building (GWSB #3) has high upfront costs:

Total Project Cost Range:

\$96 - \$138 Million

➤ SRS pursuing a lower cost alternative - impacts to the public and environment are less than or equal to that of existing GWSBs.








Alternatives Analysis


- > Alternatives Analysis was conducted:
 - GWSB #3 with an option to increase capacity to 3,000 canisters

- Above grade cask storage
- Additional options
- > Final Report issued January 17, 2012
 - "SRS Dry Cask" Alternative selected for further development
 - Based on commercial spent nuclear fuel dry storage concept

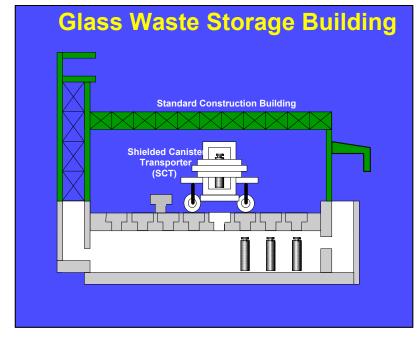



Alternatives Analysis – Up Front Cost Comparison

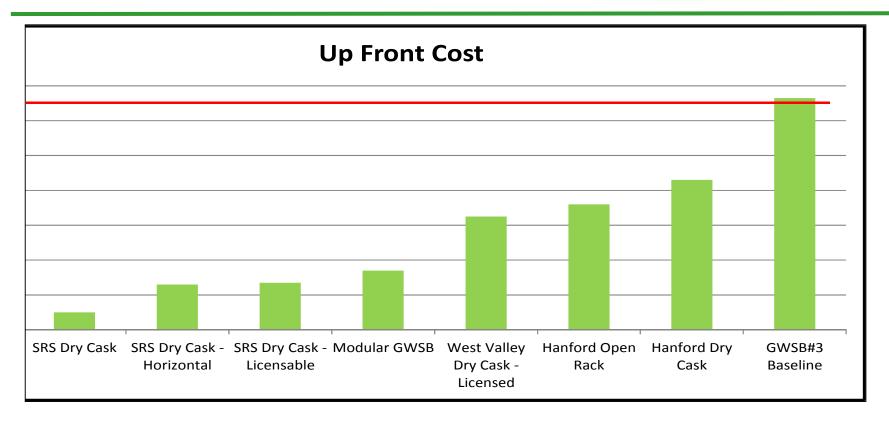


- Cask Options include: vertical or horizontal w/ shielding only, licensable, or **NRC** licensed
- Hanford Open Rack underground open vault cans stacked 2 high
- **GWSB** underground concrete vault with individual canister supports





Alternatives Analysis – Life Cycle Comparison

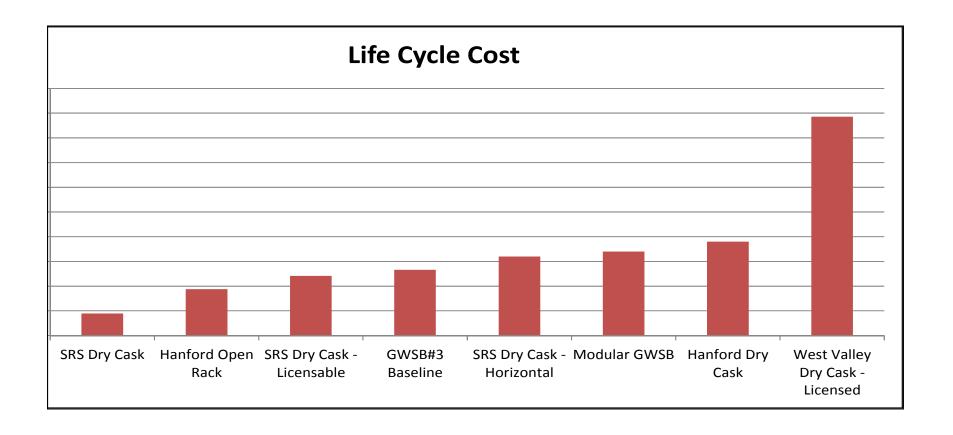



SRS Storage Alternative - Development/Decision

- Titled: Canister Interim Storage Project (CISP)
- Conceptual Design Prepared Feb May 2012
 - Define scope and prepare conceptual design drawings (~5% of total design)
 - Perform risk assessment
 - Prepare a preliminary hazards assessment
 - > Prepare schedule and cost estimates
 - Reduces risk by supporting more accurate cost estimates for all project scope

closure



Canister Interim Storage Project

- Use existing Shielded Canister Transporter (SCT)
- > Remove ~ 3000 lowest radiological dose canisters from

GWSB #1 and #2



GWSB #1



Shielded Canister Transporter



CISC - Canister Interim Storage Container


- > Concrete-reinforced with 30" wall x 12' diameter x 15.5' high
- **>** 106 tons empty; 126 tons w/7 canisters
- ➤ Safety: Preliminary analysis indicates mass, low center of gravity, and height-todiameter ratio, CISC will not tip during high winds or a tornado and cannot be significantly damaged by missiles. Seismically safe configuration.
- ➤ Not licensed for shipment






CISP – Canister Transfer Station & Carrier

- Shielded Canister
 Transporter (SCT)
 will remove canister
 from GWSB and
 transport canister to
 Canister Transfer
 Station (CTS)
- SCT will place 7 canisters into the container in the CTS
- Carrier will move container to storage pad

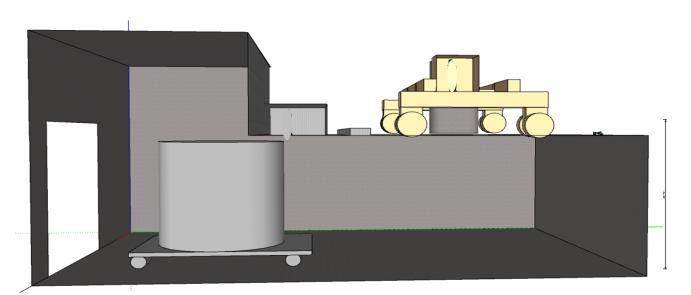




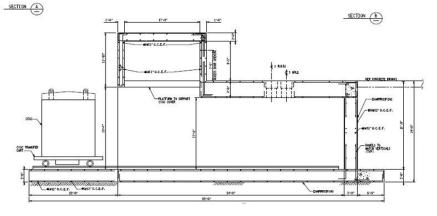



10

Proposed CISP Site Plan

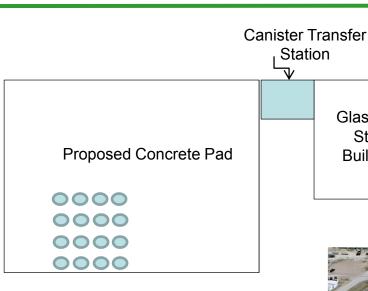

Glass Waste Storage Building #2

Glass Waste Storage Building #1

- > Reinforced concrete pad 18" thick x 350' x 350' for 430 containers
- > Canister Transfer **Station (CTS)**





Alternative Storage of Vitrified Waste - Conclusion

- DOE Reviewed Multiple Alternatives for Storage
 - Upfront costs of GWSB #3 are not supported by out year budget projections
 - Other safe storage options provide opportunity for improved cash flow and lower overall costs
 - Above ground storage option developed Canister Interim Storage Project (CISP)
- Next step Selection of Preferred Alternative
- Projected path forward:
 - > FY 13 Design Start
 - > FY 14 Long-Lead Procurement Start
 - > FY 15 Construction Start
 - > FY 16 Ready for Operations





