
Potential Radiation Doses



Timothy Jannik, Patricia Lee, and Eduardo Farfan
Savannah River National Laboratory

This chapter presents the potential doses to offsite individuals and the surrounding population from the 2007 Savannah River Site (SRS) atmospheric and liquid radioactive releases. Also documented are potential doses from special-case exposure scenarios—such as the consumption of deer meat, fish, and goat milk. Unless otherwise noted, the generic term “dose” used in this report includes both the committed effective dose equivalent (50-year committed dose) from internal deposition of radionuclides and the effective dose equivalent attributable to sources external to the body. Use of the effective dose equivalent allows doses from different types of radiation and to different parts of the body to be expressed on the same basis.

Descriptions of the SRS effluent monitoring and environmental surveillance programs discussed in this chapter can be found in chapter 4, “Effluent Monitoring,” and chapter 5, “Environmental Surveillance.” A complete description of how potential doses are calculated can be found in section 1108 of the Savannah River Site Environmental Monitoring Section Plans and Procedures, WSRC–3Q1–2, Volume 1 [SRS EM Program, 2001].

All potential dose calculation results are presented in data tables on the CD accompanying this report.

Calculating Dose

Potential offsite doses from SRS effluent releases of radioactive materials (atmospheric and liquid) are calculated for the following scenarios:

- hypothetical maximally exposed individual living at the SRS boundary
- population living within an 80-km (50-mile) radius of SRS

Because the U.S. Department of Energy (DOE) has adopted dose factors only for adults [DOE, 1988],

Dose to the Hypothetical Maximally Exposed Individual

When calculating radiation doses to the public, SRS uses the concept of the hypothetical maximally exposed individual; however, because of the conservative lifestyle assumptions used in the dose models, no such person is known to exist. The parameters used for the dose calculations are as follows:

For airborne releases - Someone who lives at the SRS boundary 365 days per year and consumes milk, meat, and vegetables produced at that location

For liquid releases - Someone who lives downriver of SRS (near River Mile 118.8) 365 days per year, drinks 2 liters of untreated water per day from the Savannah River, consumes 19 kg (42 pounds) per year of Savannah River fish, and spends the majority of time on or near the river

To demonstrate compliance with the DOE Order 5400.5 all-pathway dose standard of 100 mrem per year, SRS conservatively combines the airborne pathway and liquid pathway dose estimates, even though the two doses are calculated for hypothetical individuals residing at different geographic locations.

SRS calculates maximally exposed individual and collective doses as if the entire 80-km population consisted of adults. For the radioisotopes that contribute the most to SRS's estimated maximum individual doses (i.e., tritium and cesium-137), the dose to infants could be approximately two to three times more than to adults. The dose to older children becomes progressively closer to the adult dose.

SRS also uses adult consumption rates for food and drinking water and adult usage parameters to estimate intakes of radionuclides. These [intake values](#) and [parameters](#) were developed specifically for SRS based on a regional survey [Hamby, 1991].

For dose calculations, unspecified alpha releases were conservatively treated as plutonium-239, and unspecified beta releases were treated as strontium-90. These radionuclides have the highest dose factors of the alpha- and beta-emitters, respectively, that are commonly found in SRS waste streams.

Dose Calculation Methods

To calculate annual offsite doses, SRS uses transport and dose models developed for the commercial nuclear industry [NRC, 1977]. The models are described in SRS EM Program, 2001.

Meteorological Database

To show compliance with DOE environmental orders, potential offsite doses from releases of [radioactivity to the atmosphere](#) were calculated with quality-assured meteorological data for A-Area, K-Area (for combined releases from C-Area, K-Area, and L-Area), and H-Area (for combined releases from all other areas). The [meteorological databases](#) used were for the years 2002–2006, reflecting the most recent 5-year compilation period.

To show compliance with U.S. Environmental Protection Agency (EPA) regulations, only the [H-Area database](#) was used in the calculations because the EPA-required dosimetry code (CAP88, Mainframe version 1.0) is limited to a single release location.

Population Database and Distribution

Collective (population) doses from atmospheric releases are calculated for the population within an 80-km radius of SRS. Within this radius, the total population is 713,500, based on 2000 [census data](#). Some of the collective doses resulting from SRS liquid releases are calculated for the populations served by

the City of Savannah Industrial and Domestic Water Supply Plant (Savannah I&D), near Port Wentworth, Georgia, and by the Beaufort-Jasper Water and Sewer Authority's (BJWSA) Chelsea and Purrysburg Water Treatment Plants, near Beaufort, South Carolina. According to the treatment plant operators, the population served by the Savannah I&D facility during 2007 was 26,300 persons, while the population served by the BJWSA Chelsea facility was 77,000 persons and by the BJWSA Purrysburg facility, 58,000 persons.

River Flow Rate Data

Savannah River [flow rates](#) are recorded at a gauging station near River Mile 118.8 (U.S. Highway 301 bridge) and are based on the measured water elevation. However, these data are not used directly in dose calculations. Used instead are "effective" flow rates, which are based on 1) the measured annual release of tritium and 2) the annual average tritium concentrations measured at River Mile 118.8 and at the three downriver water treatment plants. The use of effective river flow rates in the dose calculations generally is more conservative than the use of measured flow rates because it accounts for less dilution of other radionuclides.

For 2007, the River Mile 118.8 calculated (effective) flow rate of 5,390 cubic feet per second (cfs) was used. For comparison, the 2007 measured annual average flow rate was 6,090 cfs. The 2007 [effective flow rate](#) was 9 percent less than the 2006 effective flow rate of 5,790 cfs.

The 2007 effective flow rate was 6,890 cfs for the Savannah I&D facility, 7,210 cfs for the BJWSA Chelsea facility, and 6,870 cfs for the BJWSA Purrysburg facility.

Dose Calculation Results

Liquid Pathway

Liquid Release Source Terms ([Table](#))

The 2007 radioactive [liquid release quantities](#) used as the source term in SRS dose calculations are discussed in chapter 4 and shown by radionuclide in table 6–1.

Tritium accounts for more than 99 percent of the total amount of radioactivity released from the site to the Savannah River. In 2007, a total of 1,300 curies of tritium were released from SRS to the river. In the recent past, the total amount of tritium used in SRS

dose calculation was based on the measured tritium concentration at River Mile 118.8. However, the total from this location includes the tritium releases from Georgia Power Company's Vogtle Electric Generating Plant (VEGP). Beginning in 2006, maximally-exposed-individual doses are calculated and documented in this report using SRS-only releases. Data from continuously monitored liquid effluent

discharge points are used in conjunction with site seepage basin and Solid Waste Disposal Facility migration release measurements to quantify the total tritium released from SRS. A separate dose calculation is performed (for information only) that includes the total amount of tritium (SRS plus VEGP) measured at River Mile 118.8, which in 2007 was 1,940 curies.

**Table 6-1
2007 Radioactive Liquid Release Source Term and 12-Month Average Downriver Radionuclide Concentrations Compared to EPA's Drinking Water Maximum Contaminant Levels (MCLs)**

Nuclide	Curies Released	12-Month Average Concentration (pCi/mL)				
		Below SRS ^a	BJWSA Chelsea ^b	BJWSA Purrysburg ^b	Savannah I&D ^c	EPA MCL
H-3 ^d	1.94E+03	4.03E-01	3.01E-01	3.16E-01	3.15E-01	2.00E+01
Co-60	4.41E-04	9.17E-08	6.85E-08	7.19E-08	7.17E-08	1.00E-01
Sr-90	2.45E-02	5.09E-06	3.80E-06	3.99E-06	3.98E-06	8.00E-03
Tc-99	2.15E-04	4.47E-08	3.34E-08	3.51E-08	3.49E-08	9.00E-01
I-129	9.26E-03	1.93E-06	1.44E-06	1.51E-06	1.50E-06	1.00E-03
Cs-137	4.18E-02	8.69E-06	6.49E-06	6.81E-06	6.79E-06	2.00E-01
U-234 ^e	3.18E-04	6.61E-08	4.94E-08	5.18E-08	5.17E-08	1.87E+02
U-235 ^e	1.46E-05	3.04E-09	2.27E-09	2.38E-09	2.37E-09	6.48E-02
U-238 ^e	2.09E-04	4.35E-08	3.25E-08	3.41E-08	3.40E-08	1.01E-02
Pu-238	2.59E-04	5.39E-08	4.02E-08	4.22E-08	4.21E-08	1.50E-02
Pu-239	7.79E-06	1.62E-09	1.21E-09	1.27E-09	1.27E-09	1.50E-02
Am-241	3.16E-05	6.57E-09	4.91E-09	5.15E-09	5.14E-09	1.50E-02
Cm-244	1.46E-05	3.04E-09	2.27E-09	2.38E-09	2.37E-09	1.50E-02
Alpha	1.78E-02	3.70E-06	2.76E-06	2.90E-06	2.89E-06	1.50E-02

^a Near Savannah River Mile 118.8, downriver of SRS at the U.S. Highway 301 bridge
^b Beaufort-Jasper, South Carolina, drinking water
^c Port Wentworth, Georgia, drinking water
^d The tritium concentrations and source term are based on actual measurements of the Savannah River water at the various locations. They include contributions from the VEGP. All other radionuclide concentrations are calculated based on the effective river flow rate.
^e MCL for uranium in natural water, based on radioisotope-specific activity X 30 µg/L

Radionuclide Concentrations in Savannah River Water, Drinking Water, and Fish

The concentrations of tritium in Savannah River water and cesium-137 in Savannah River fish are measured at several locations along the river for use in dose determinations and model comparisons. The amounts of all other radionuclides released from SRS are so small that they usually cannot be detected in the Savannah River using conventional analytical techniques. Therefore, their concentrations in the river are calculated using the LADTAP XL code, based on the annual release amounts and on the applicable effective flow rate.

Radionuclide Concentrations in River Water and Treated Drinking Water

The measured concentrations of tritium in the Savannah River near River Mile 118.8 and at the Savannah I&D and BJWSA water treatment facilities are shown in table 6-1, as are the calculated concentrations for the other released radionuclides. These downriver tritium concentrations include the tritium releases from SRS and the neighboring VEGP.

Because the combined total amount of tritium released from SRS and VEGP decreased from 3,330 curies in 2006 to 1,940 curies in 2007, the 12-month average tritium concentration measured in Savannah River water near River Mile 118.8 (0.403 pCi/mL) was 38 percent less than the 2006 concentration of 0.645 pCi/mL. The concentrations at the BJSWA Chelsea (0.301 pCi/mL) and Purrysburg (0.316 pCi/mL) facilities, and at the Savannah I&D (0.315 pCi/mL) water treatment plant, remained below the EPA maximum contaminant level (MCL) of 20 pCi/mL.

The MCL for each radionuclide released from SRS during 2007 is provided in table 6-1. The table indicates that all individual radionuclide concentrations at the three downriver community drinking water systems, as well as at River Mile 118.8, were below the MCLs.

Because more than one radionuclide is released from SRS, the sum of the fractions of the observed concentration of each radionuclide to its corresponding MCL must not exceed 1.0. The sum of the fractions was 0.0291 at the BJSWA Chelsea facility, 0.0305 at the BJSWA Purrysburg facility, and 0.0304 at the Savannah I&D facility. These are below the 1.0 sum-of-the-fractions requirement.

For 2007, the sum of the fractions at the River Mile 118.8 location was 0.0389. This is provided only for comparison because River Mile 118.8 is not a

community water system location.

Radionuclide Concentrations in River Fish At SRS, an important dose pathway for the maximally exposed individual is from the consumption of fish.

Fish exhibit a high degree of bioaccumulation for certain elements. For the element cesium (including radioactive isotopes of cesium), the bioaccumulation factor for Savannah River fish is approximately 3,000. That is, the concentration of cesium found in fish flesh is about 3,000 times the concentration of cesium found in the water in which the fish live [Carlton et al., 1994].

Because of this high bioaccumulation factor, cesium-137 is detected more easily in fish flesh than in river water. Therefore, the fish pathway dose from cesium-137 normally is based directly on the radioanalysis of the fish collected near Savannah River Mile 118.8, which is the assumed location of the hypothetical maximally exposed individual. However, in 2007, the calculated concentration of cesium-137 in fish, which is based on measured effluent releases, was determined to be more than the actual measured concentration in fish. To be conservative, the higher calculated [cesium-137 concentration in fish](#) was used in the 2007 dose determinations.

Dose to the Maximally Exposed Individual

As shown in table 6-2, the [highest potential dose to the maximally exposed individual from liquid releases](#) in 2007 was estimated at 0.05 mrem (0.0005 mSv). This dose is 0.05 percent of the DOE Order 5400.5 ("Radiation Protection of the Public and the Environment") 100-mrem all-pathway dose standard for annual exposure. The 2007 dose is about 40 percent less than the 2006 dose of 0.09 mrem (0.0009 mSv). This decrease is attributed to reduced tritium, cesium-137, and unspecified alpha releases from the site in 2007 compared to 2006 (chapter 4).

Approximately 46 percent of the [2007 dose to the maximally exposed individual](#) resulted from the ingestion of cesium-137, mainly from the consumption of fish. About 24 percent of the dose resulted from the ingestion of unspecified alpha emitters (mainly via drinking water) and an additional 24 percent from the ingestion of tritium. Every other radionuclide contributed less than 2 percent to the dose.

Using the 2007 total tritium source term (which includes SRS and VEGP releases measured at River Mile 118.8) of 1,940 curies, the maximally-exposed-individual dose was calculated to be 0.06 mrem

Table 6–2
Potential Dose to the Maximally Exposed Individual from SRS Liquid Releases in 2007

	Committed Dose (mrem)	Applicable standard (mrem)	Percent of Standard
Maximally Exposed Individual			
Near Site Boundary (all liquid pathways)	0.05	100 ^a	0.05
At BJSWA Chelsea (public water supply only)	0.02	4 ^b	0.50
At BJSWA Purrysburg (public water supply only)	0.02	4 ^b	0.50
At Savannah I&D (public water supply only)	0.02	4 ^b	0.50
^a All-pathway dose standard: 100 mrem per year (DOE Order 5400.5) ^b Drinking water pathway standard: 4 mrem per year (DOE Order 5400.5)			

(0.0006 mSv). This dose is 40 percent less than the equivalent 2006 dose of 0.1 mrem (0.001 mSv).

Drinking Water Pathway Persons downriver of SRS may receive a radiation dose by consuming drinking water that contains radioactivity as a result of liquid releases from the site. In 2007, tritium in downriver drinking water represented the majority of the dose (about 47 percent) received by persons at the three downriver [water treatment plants](#). Unspecified alpha-emitters accounted for about 44 percent.

Based on SRS-only releases, the maximum potential drinking water dose during 2007 was determined to be 0.02 mrem (0.0002 mSv)—about 33 percent less than the 2006 dose of 0.03 mrem (0.0003 mSv). Again, this decrease is attributed to reduced releases from the site of tritium and unspecified alpha emitters. As shown in table 6–2, the maximum dose of 0.02 mrem is 0.5 percent of the DOE standard of 4 mrem per year for public water supplies.

Using the SRS-plus-VEGP total tritium source term of 1,940 curies, the maximum drinking water dose was calculated to be 0.03 mrem (0.0003 mSv) in 2007.

Collective (Population) Dose

The collective drinking water consumption dose is calculated for the discrete population groups served by the BJWSA and Savannah I&D water treatment plants. The collective dose from other pathways is calculated

for a diffuse population that makes use of the Savannah River; however, this population cannot be described as being in a specific geographical location.

In 2007, the [collective dose from SRS liquid releases](#) was estimated at 2.1 person-rem (0.021 person-Sv). This is 28 percent less than the 2006 collective dose of 2.9 person-rem (0.029 person-Sv).

Using the SRS-plus-VEGP total tritium source term of 1,940 curies, the collective dose was calculated to be 2.5 person-rem (0.025 person-Sv) in 2007.

Potential Dose from Agricultural Irrigation

Based on surveys of county agricultural extension agencies, there are no known large-scale uses of river water downstream of SRS for agricultural irrigation purposes [Hamby, 1991]. However, the potential for irrigation does exist, so potential doses from this pathway are calculated for information purposes only but are not included in calculations of the official maximally exposed individual or collective doses.

As in previous years, [collective doses from agricultural irrigation](#) were calculated for 1,000 acres of land devoted to each of four major food types—vegetation, leafy vegetation, milk, and meat. It is assumed that all the food produced on the 1,000-acre parcels is consumed by the population (713,500) within 80 km of the site.

For 2007, a potential offsite dose of 0.05 mrem (0.0005 mSv) to the maximally exposed individual and a collective dose of 3.5 person-rem (0.035 person-Sv) were estimated for this exposure pathway.

Air Pathway

Atmospheric Source Terms

The 2007 radioactive [atmospheric release quantities](#) used as the source term in SRS dose calculations are discussed in chapter 4. Estimates of unmonitored diffuse and fugitive sources were included in the atmospheric source term, as required, for demonstrating compliance with National Emission Standards for Hazardous Air Pollutants (NESHAP) regulations.

Atmospheric Concentrations

Calculated radionuclide concentrations are used for dose determinations instead of measured concentrations. This is because most radionuclides released from SRS cannot be measured (using conventional analytical methods) in the air samples collected at the site perimeter and offsite locations. However, the [concentrations of tritium oxide](#) at the site perimeter locations usually can be measured and are compared with calculated concentrations as a verification of the dose models.

Dose to the Maximally Exposed Individual

In 2007, the estimated [dose from atmospheric releases](#) to the maximally exposed individual was 0.04 mrem (0.0004 mSv), which is 0.4 percent of the DOE Order 5400.5 air pathway standard of 10 mrem per year. Table 6-3 compares the maximally-exposed-individual dose with the DOE standard. The 2007 dose is about 60 percent less than the 2006 maximally-exposed-individual dose of 0.11 mrem (0.0011 mSv). This decrease is attributed to [reduced diffuse and fugitive releases](#) of unspecified alpha- and beta-emitters—primarily from a specific remediation project called the General Separations Area Consolidated Unit (GSACU). This one-time project was completed in 2006 and did not affect the 2007 source term. By definition, diffuse and fugitive releases cannot be measured but are conservatively estimated based on the inventory of residual radionuclides in waste sites being remediated.

Tritium oxide releases accounted for about 69 percent of the dose to the maximally exposed individual, and iodine-129 releases accounted for about 11 percent of

the dose. No other individual radionuclide accounted for more than 10 percent of the [maximally-exposed-individual dose](#).

The major pathways contributing to the maximally-exposed-individual dose from atmospheric releases were inhalation (41 percent), vegetation consumption (40 percent), meat and milk consumption (15 percent), and ground exposure (4 percent). For 2007, the [north sector](#) of the site was the [location of the highest dose](#) to the maximally exposed individual.

Additional calculations of the dose to the maximally exposed individual again were performed substituting goat milk for the customary cow milk pathway. The potential dose using the [goat milk pathway](#) was estimated at 0.05 mrem (0.0005 mSv).

Collective (Population) Dose

In 2007, the [airborne-pathway collective dose](#) was estimated at 1.8 person-rem (0.018 person-Sv)—less than 0.01 percent of the annual collective dose received from natural sources of radiation (about 214,000 person-rem). Tritium oxide releases accounted for about 75 percent of the collective dose. The 2007 collective dose is 64 percent less than the 2006 collective dose of 5.0 person-rem (0.05 person-Sv). Again, the relatively large decrease in dose is attributed to reduced diffuse and fugitive releases of unspecified alpha- and beta-emitters estimated from the GSACU remediation project.

NESHAP Compliance

To demonstrate [compliance with NESHAP](#) regulations [EPA, 2002], maximally exposed individual and collective doses were calculated using 1) the CAP88 computer code, 2) the 2007 airborne-release source term, and 3) [site-specific input parameters](#) [SRS EM Program, 2001]. The CAP88 code estimates a higher dose for tritium oxide than do the MAXDOSE-SR and POPDOSE-SR codes, which are used for demonstrating compliance with DOE environmental orders. Most of the differences occur in the tritium dose estimated from food consumption. The major cause of this difference is the CAP88 code's use of 100-percent equilibrium between tritium in air moisture and tritium in food moisture, whereas the MAXDOSE-SR and POPDOSE-SR codes use 50-percent equilibrium values, as recommended by the Nuclear Regulatory Commission [NRC, 1977]. A site-specific study indicated that the 50-percent value is correct for the atmospheric conditions at SRS [Hamby and Bauer, 1994].

Table 6–3
Potential Dose to the Maximally Exposed Individual from SRS Atmospheric Releases in 2007

	MAXDOSE–SR	CAP88 (NESHAP)
Calculated dose (mrem)	0.04	0.04
Applicable standard (mrem)	10 ^a	10 ^b
Percent of standard	0.40	0.40

^a DOE: DOE Order 5400.5, February 8, 1990
^b EPA: (NESHAP) 40 CFR 61, Subpart H, December 15, 1989

Because tritium oxide dominates the doses determined using the CAP88 code, other radionuclides (such as iodine-129) are less important—on a percentage-of-dose basis—for the CAP88 doses than for the MAXDOSE–SR and POPDOSE–SR doses.

For 2007, the maximally-exposed-individual dose was estimated at 0.04 mrem (0.0004 mSv), which is 0.4 percent of the 10-mrem-per-year EPA standard, as shown in table 6–3. Tritium oxide releases accounted for about 93 percent of this dose.

For NESHAP, the dose from [diffuse and fugitive releases](#) is required to be reported separately. For 2007, the maximally-exposed-individual dose from diffuse and fugitive releases was estimated to be 0.02 mrem (0.0002 mSv), which accounts for about half the total maximally-exposed-individual dose.

The CAP88-determined collective dose was estimated at 4.4 person-rem (0.044 person-Sv). Tritium oxide releases accounted for about 93 percent of this dose.

All-Pathway Dose

To demonstrate compliance with the DOE Order 5400.5 all-pathway dose standard of 100 mrem (1.0 mSv) per year, SRS conservatively combines the maximally exposed individual airborne pathway and liquid pathway dose estimates, even though the two doses are calculated for hypothetical individuals residing at different geographic locations. For 2007, the potential maximally exposed individual all-pathway dose was 0.10 mrem (0.001 mSv)—slightly more than 0.04 mrem from air pathways plus slightly more than 0.05 mrem from liquid pathways—which is 0.10 percent of the 100-mrem-per-year DOE dose standard. This [dose is 50 percent less](#) than the

2006 all-pathway dose of 0.20 mrem (0.002 mSv). As previously discussed, this relatively large decrease is attributed to reduced releases of tritium in liquid effluents and unspecified alpha and beta emitters in atmospheric releases.

Figure 6–1 shows a 10-year history of SRS’s all-pathway (airborne pathway plus liquid pathway) doses to the maximally exposed individual.

Sportsman Dose

DOE Order 5400.5 specifies radiation dose standards for individual members of the public. The dose standard of 100 mrem per year includes doses a person receives from routine DOE operations through all exposure pathways. Nontypical exposure pathways, not included in the standard calculations of the doses to the maximally exposed individual, are considered and quantified separately. This is because they apply to low-probability scenarios, such as consumption of fish caught exclusively from the mouths of SRS streams, or to unique scenarios, such as volunteer deer hunters.

In addition to deer, hog, and fish consumption, the following exposure pathways were considered for an offsite hunter and an offsite fisherman—both on Creek Plantation, a privately owned portion of the Savannah River Swamp, which was contaminated by SRS operations in the 1960s (chapter 5):

- External exposure to contaminated soil
- Incidental ingestion of contaminated soil
- Incidental inhalation of resuspended contaminated soil

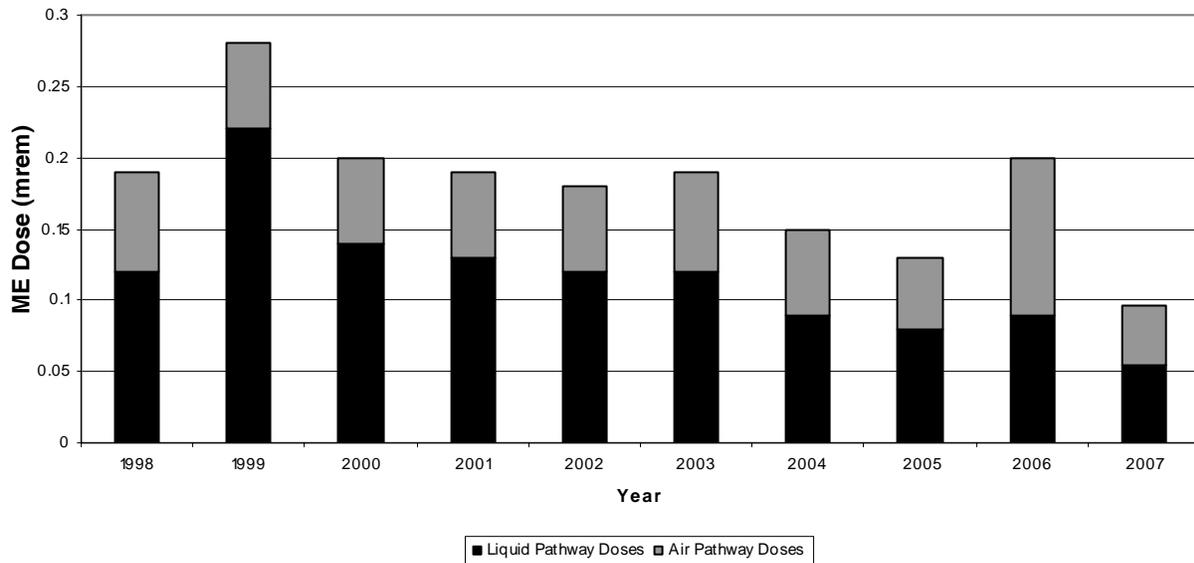


Figure 6–1 Ten-Year History of SRS Maximum Potential All-Pathway Doses

Onsite Hunter Dose

Deer and Hog Consumption Pathway Annual hunts, open to members of the general public, are conducted at SRS to control the site’s deer and feral hog populations, and to reduce animal-vehicle accidents. The estimated dose from the consumption of harvested deer or hog meat is determined for every onsite hunter. During 2007, the maximum dose that could have been received by an actual onsite hunter was estimated at 9 mrem (0.09 mSv), or 9 percent of DOE’s 100-mrem all-pathway dose standard (table 6–4). This dose was determined for an actual hunter who in fact harvested eight animals (all deer) during the 2007 hunts. The hunter-dose calculation is based on the conservative assumption that this prolific hunter individually consumed the entire edible portion—approximately 179 kg (396 pounds)—of the animals he harvested from SRS.

Deer and Hog Consumption Pathway The deer and hog consumption pathway considered was for hypothetical offsite individuals whose entire intake of meat during the year was either deer or hog meat. It was assumed that these individuals harvested deer or hogs that had resided on SRS, but then moved off site.

Based on these low-probability assumptions and on the measured average concentration of cesium-137 in all deer (1.46 pCi/g) and hogs (1.58 pCi/g) harvested from SRS during 2007, the potential maximum doses

from this pathway were estimated at 1.9 mrem (0.019 mSv) for the deer hunter and 2.3 mrem (0.023 mSv) for the hog hunter.

A background cesium-137 concentration of 1 pCi/g is subtracted from the onsite average concentrations before calculating the doses. The background concentration is based on previous analyses of deer harvested at least 80 km from SRS (table 33, *SRS Environmental Data for 1994, WSRC-TR-95-077*).

Savannah River Swamp Hunter Soil Exposure Pathway The potential dose to a recreational hunter exposed to SRS legacy contamination in Savannah River Swamp soil on the privately owned Creek Plantation in 2007 was estimated using the RESRAD code [Yu et al., 2001]. It was assumed that this recreational sportsman hunted for 120 hours during the year (8 hours per day for 15 days) at the location of maximum radionuclide contamination.

Using the worst-case radionuclide concentrations from the most recent comprehensive survey—conducted in 2005—the potential dose to a hunter from a combination of (1) external exposure to the contaminated soil, (2) incidental ingestion of the soil, and (3) incidental inhalation of resuspended soil was estimated to be 2.9 mrem (0.029 mSv).

As shown in table 6–4, the offsite deer consumption pathway and the Savannah River Swamp hunter soil

Table 6–4
2007 Maximum Potential All-Pathway and Sportsman Doses Compared to the DOE
All-Pathway Dose Standard

	Dose (mrem)	Applicable Standard (mrem) ^a	Percent of Standard
Maximally-Exposed-Individual Dose			
All-Pathway (Liquid Plus Airborne Pathway)	0.10	100	0.10
Sportsman Dose			
Onsite Hunter	9	100	9
Creek Mouth Fisherman ^b	0.24	100	0.24
Savannah River Swamp Hunter			
Offsite Hog Consumption	2.30		
Offsite Deer Consumption	1.90		
Soil Exposure ^c	2.90		
Total Offsite Deer Hunter Dose	4.80	100	4.8
Savannah River Swamp Fisherman			
Steel Creek Fish Consumption	0.22		
Soil Exposure ^d	0.28		
Total Offsite Fisherman Dose	0.50	100	0.50

^a All-pathway dose standard: 100 mrem per year (DOE Order 5400.5)
^b In 2007, the maximum fisherman dose was caused by the consumption of bass from the mouth of Lower Three Runs.
^c Includes the dose from a combination of external exposure to—and incidental ingestion and inhalation of—the worst-case Savannah River Swamp soil
^d Includes the dose from a combination of external exposure to—and incidental ingestion and inhalation of—Savannah River Swamp soil near the mouth of Steel Creek

exposure pathway were conservatively added together to obtain a total offsite hunter dose of 4.8 mrem (0.048 mSv). This potential dose is 4.8 percent of the DOE 100-mrem all-pathway dose standard.

Offsite Fisherman Dose

Creek Mouth Fish Consumption Pathway

For 2007, radioanalyses were conducted of fish taken from the mouths of five SRS streams, and the resulting estimated doses were calculated. As shown in table 6–4, the maximum potential dose from this pathway was estimated at 0.24 mrem (0.0024 mSv) from the [consumption of bass](#)

collected at the mouth of Lower Three Runs. This hypothetical dose is based on the low-probability scenario that, during 2007, a fisherman consumed 19 kg of bass caught exclusively from the mouth of Lower Three Runs. About 92 percent of this potential dose was from cesium-137.

Savannah River Swamp Fisherman Soil Exposure Pathway

The potential dose to a recreational fisherman exposed to SRS legacy contamination in Savannah River Swamp soil on the privately owned Creek Plantation in 2007 was estimated using the RESRAD code [Yu et al., 2001]. It was assumed that this recreational sportsman fished on the South Carolina bank of the

Savannah River near the mouth of Steel Creek for 250 hours during the year.

Using the radionuclide concentrations measured at this location, the potential dose to a fisherman from a combination of (1) external exposure to the contaminated soil, (2) incidental ingestion of the soil, and (3) incidental inhalation of resuspended soil was estimated to be 0.28 mrem (0.0028 mSv).

As shown in table 6-4, the maximum Steel Creek mouth fish consumption dose (0.22 mrem) and the Savannah River Swamp fisherman soil exposure pathway were conservatively added together to obtain a total offsite creek mouth fisherman dose of 0.50 mrem (0.005 mSv). This potential dose is 0.50 percent of the DOE 100-mrem all-pathway dose standard.

Potential Risk from Consumption of SRS Creek Mouth Fish

During 1991 and 1992, in response to a U.S. House of Representatives Appropriations Committee request for a plan to evaluate risk to the public from fish collected from the Savannah River, SRS developed—in conjunction with EPA, the Georgia Department of

Natural Resources, and the South Carolina Department of Health and Environmental Control—the *Westinghouse Savannah River Company/ Environmental Monitoring Section Fish Monitoring Plan*, which is summarized in SRS EM Program, 2001. Among the reporting requirements of this plan are (1) assessing radiological risk from the consumption of Savannah River fish and (2) presenting a summary of the results in the annual *SRS Environmental Report*.

Risk Comparisons For 2007, the maximum potential radiation doses and lifetime risks from the consumption of SRS creek mouth fish for 1-year, 30-year, and 50-year exposure durations are shown in table 6-5, and are compared to the radiation risks associated with the DOE Order 5400.5 all-pathway dose standard of 100 mrem (1.0 mSv) per year. The potential risks were estimated using the cancer morbidity risk coefficients from Federal Guidance Report No. 13 [EPA, 1999].

For 2007, the maximum recreational fisherman dose was caused by the consumption of bass collected at the mouth of Lower Three Runs. Figure 6-2 shows a 10-year history of the annual potential radiation doses

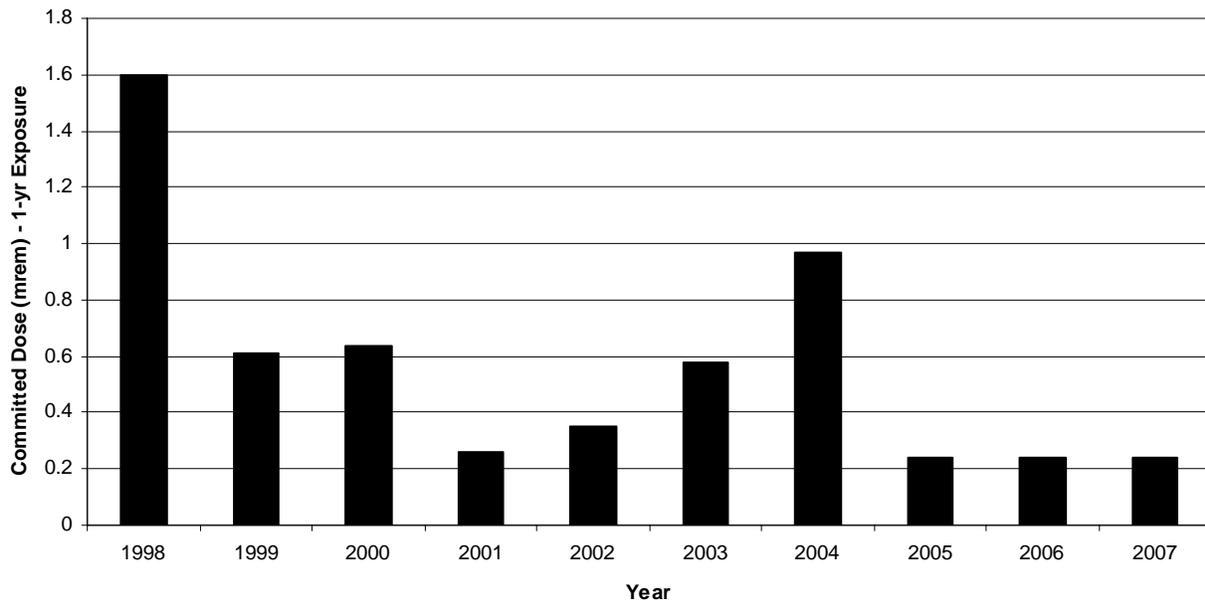


Figure 6-2 Ten-Year History of SRS Creek Mouth Fisherman’s Dose

**Table 6-5
Potential Lifetime Risks from the Consumption of Savannah River Fish Compared to Dose Standards**

	Committed Dose (mrem)	Potential Risk^a (unitless)
2007 Savannah River Fish		
1-Year Exposure	0.24	1.8E-07
30-Year Exposure	7.20	5.4E-06
50-Year Exposure	12.0	9.0E-06
Dose Standard		
100-Mrem/Year All Pathway		
1-Year Exposure	100	7.3E-05
30-Year Exposure	3,000	2.2E-03
50-Year Exposure	5,000	3.7E-03
^a It should be noted that all radiological risk factors are based on observed and documented health effects to actual people who have received high doses (more than 10,000 mrem) of radiation, such as the Japanese atomic bomb survivors. Radiological risks at low doses (less than 10,000 mrem) are theoretical and are estimated by extrapolating the observed health effects at high doses to the low-dose region by using a linear, no-threshold model. However, cancer and other health effects have not been observed consistently at low radiation doses because the health risks either do not exist or are so low that they are undetectable by current scientific methods.		

from consumption of Savannah River fish. No apparent trends can be discerned from these data. This is because there is large variability in the annual strontium-90 and cesium-137 concentrations measured in fish from the same location due to differences in

- the size of the fish collected each year
- their mobility and location within the stream mouth from which they are collected
- the time of year they are collected
- the amount of strontium-90 and cesium-137 available in the water and sediments at the site stream mouths—caused by annual changes in stream flow rates (turbulence) and water chemistry

As indicated in table 6-5, the 50-year maximum potential lifetime risk from consumption of SRS creek mouth fish was 9.0E-06, which is below the 50-year risk (3.7E-03) associated with the 100-mrem-per-year dose standard.

According to EPA practice, if a potential lifetime risk is calculated to be less than 1.0E-06 (i.e., one

additional case of cancer over what would be expected in a group of 1,000,000 people), then the risk is considered minimal and the corresponding contaminant concentrations are considered negligible. If a calculated risk is more than 1.0E-04 (one additional case of cancer in a population of 10,000), then some form of corrective action or remediation usually is required. However, if a calculated risk falls between 1.0E-04 and 1.0E-06, which is the case with the maximum potential lifetime risks from the consumption of Savannah River fish, then the risk may be deemed acceptable if it is kept as low as reasonably achievable (ALARA), although actions to further reduce this risk can be considered. At SRS, the environmental ALARA program [SRS EM Program, 2001] is in place to ensure that the potential risk from site radioactive liquid effluents (and, therefore, from consumption of Savannah River fish) is kept ALARA.

Radiation Dose to Aquatic and Terrestrial Biota

DOE Order 5400.5 establishes an interim dose standard for protection of native aquatic animals. The absorbed dose limit to these organisms is 1.0 rad per

day (0.01 Gy per day) from exposure to radioactive material in liquid effluents released to natural waterways.

DOE Biota Concentration Guides

At SRS, the evaluations of biota doses for aquatic and terrestrial systems are performed using the RESRAD-Biota model (version 1.21), which is based on the DOE standard entitled *A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota* [DOE, 2002].

The aquatic-systems evaluation includes exposures to primary (herbivores) and secondary (predators) aquatic animals, and the biota concentration guides (BCGs) are based on the 1.0-rad-per-day dose limit. Aquatic plants are not considered. The terrestrial-systems evaluation includes exposures to terrestrial plants and animals and is based on a 10-rad-per-day dose limit for plants and a 0.1-rad-per-day dose limit for animals.

For the aquatic-systems evaluation, an initial screening was performed using maximum radionuclide concentration data for the 10 SRS Environmental Permitting and Monitoring (EPM) stream sampling locations from which co-located water and sediment samples are collected. An exception to this was made

for sample location FM-2B (located on Four Mile Creek between F-Area and H-Area) because of its historically high cesium and tritium concentration levels. This location was included in the initial screening even though no co-located sediment sample is collected there. The combined water-plus-sediment BCG sum of the ratios was used for the aquatic systems evaluation. A sum of the ratios less than 1.0 indicates the sampling site has passed the initial pathway screen.

For the terrestrial-systems evaluation, an initial screening was performed using concentration data from the five EPM onsite radiological soil sampling locations. Only one soil sample per year is collected and analyzed for radioactivity from each location. For 2007, stream sampling locations R-1 (located adjacent to R-Reactor near the center of SRS) and FM-2 failed the initial aquatic systems screen because of relatively high maximum concentrations of cesium-137 in the water and sediment samples. All other locations passed, including the five soil sampling locations used for the terrestrial assessment. For each of the two locations that failed, an additional assessment was performed using annual average radionuclide concentrations measured in the water and sediment samples. Both locations passed this secondary screen (the sum of the ratios of each was less than 1.0).