

Radiological Impact of 2023 Operations at the Savannah River Site

B. H. Stagich
K. L. Dixon
M. Peyton
July 2024
SRNL-STI-2024-00262, Revision 0



DISCLAIMER

This work was prepared under an agreement with and funded by the U.S. Government. Neither the U.S. Government or its employees, nor any of its contractors, subcontractors or their employees, makes any express or implied:

- 1. warranty or assumes any legal liability for the accuracy, completeness, or for the use or results of such use of any information, product, or process disclosed; or
- 2. representation that such use or results of such use would not infringe privately owned rights; or
- 3. endorsement or recommendation of any specifically identified commercial product, process, or service.

Any views and opinions of authors expressed in this work do not necessarily state or reflect those of the United States Government, or its contractors, or subcontractors.

Printed in the United States of America

Prepared for U.S. Department of Energy

Keywords: *Radiation, Assessment, Environment*

Retention: Varies

Radiological Impact of 2023 Operations at the Savannah River Site

B. H. Stagich K. L. Dixon M. Peyton

July 2024

Savannah River National Laboratory is operated by Battelle Savannah River Alliance for the U.S. Department of Energy under Contract No. 89303321CEM000080.



REVIEWS AND APPROVALS

AUTHORS:

B. H. Stagich, Environmental Sciences and Dosimetry	Date
TECHNICAL REVIEW:	
K. L. Dixon, Environmental Sciences and Dosimetry	Date
M. Peyton, Environmental Sciences and Dosimetry	Date
APPROVAL:	
M. Cofer, Manager Environmental Sciences and Dosimetry	Date
B. Lee, Manager Earth, Biological, and Quantitative System Science	Date
E. Doman, Manager Environmental Monitoring Program	Date

EXECUTIVE SUMMARY

This report presents the environmental dose assessment methods and the estimated potential doses to the public from 2023 Savannah River Site (SRS) air and liquid radioactive releases. Also documented are potential doses from special-case exposure scenarios, such as the consumption of wildlife or goat milk.

Dose to the Offsite Representative Person

The 2023 dose to the offsite representative person from SRS liquid releases was 0.14 mrem and from SRS air releases it was 0.016 mrem. To show compliance with the U. S. Department of Energy (DOE) all pathway dose standard of 100 mrem/yr, SRS conservatively adds these two doses for a total representative person dose of 0.16 mrem which is 0.16% of the DOE standard.

Sportsman Doses

Onsite Hunter: SRS conducts annual hunts to control onsite deer and feral hog populations. The estimated dose from consuming harvested deer or hog meat is determined for every onsite hunter. During 2023, the maximum potential dose an onsite hunter received was 9.42 mrem, or 9.42% of DOE's 100 mrem/yr all-pathway dose standard.

Creek Mouth Fisherman: SRS estimated the maximum potential dose from fish consumption at 0.17 mrem from bass collected at the mouth of Lower Three Runs. This dose is 0.17% of the DOE standard. SRS bases this hypothetical dose on the low probability scenario that, during 2023, a fisherman consumed 24 kg (53 lbs) of bass caught exclusively from the mouth of Lower Three Runs.

Release of Material Containing Residual Radioactivity

SRS did not release any real property (land or buildings) in 2023. SRS unconditionally released a total of 13,324 items of personal property (such as tools) from radiological areas in 2023. Most of these items did not leave the Site. However, all of these items required no additional radiological controls post-survey as they met DOE Order 458.1 release criteria.

Radiation Dose to Aquatic and Terrestrial Biota

SRS conducts screening evaluations of plant and animal doses for aquatic and terrestrial ecosystems. For 2023, all SRS aquatic system locations passed the initial (Level 1) screenings and no further assessments were required at those locations.

For the land-based systems evaluation, SRS performed initial screenings using concentration data from the five onsite radiological soil sampling locations. Typically, SRS collects and analyzes only one soil sample per year from each location. For 2023, all land-based locations passed their initial (Level 1) pathway screenings.

TABLE OF CONTENTS

LIST OF TABLES	ii
LIST OF FIGURESvi	ii
LIST OF ABBREVIATIONSi	х
Introduction	1
1.0 Dose Assessment Methods	1
1.1 Representative Person	1
1.2 Dose Models	4
1.3 Dose Coefficients	5
1.4 Meteorological Database	6
1.5 Population Database and Distribution	6
1.6 Savannah River Flow Rate Data	7
2.0 Dose Calculation Results	8
2.1 Liquid Pathway Doses	8
2.1.1 Liquid Release Source Terms	8
2.1.2 Radionuclide Concentrations in Savannah River Water, Drinking Water, and Fish	9
2.1.2.1 Radionuclide Concentrations in River Water and Treated Drinking Water	9
2.1.2.2 Radionuclide Concentrations in Fish	9
2.1.2.3 Dose to the Representative Person	0
2.1.2.4 Drinking Water Pathway Dose1	1
2.1.2.5 Collective (Population) Dose1	1
2.2 Air Pathway Doses1	2
2.2.1 Atmospheric Source Terms1	2
2.2.2 Atmospheric Concentrations 1	2
2.2.3 Dose to the Representative Person	2
2.2.4 Collective (Population) Dose1	4
2.2.5 National Emission Standards for Hazardous Air Pollutants (NESHAP) Compliance 1	5
2.2.5.1 Maximally Exposed Individual Dose1	5
2.2.5.2 Collective Dose	5
2.3 All-Pathway Dose	5
2.4 Sportsman Dose	6
2.4.1 Onsite Hunter Dose	6
2.4.1.1 Deer and Hog Consumption Pathway1	6
2.4.1.2 Turkey Consumption Pathway1	7

2.4.2 Hypothetical Offsite Hunter Doses17
2.4.2.1 Deer and Hog Consumption Pathway17
2.4.2.2 Savannah River Swamp Hunter Soil Exposure Pathway17
2.4.3 Hypothetical Offsite Fisherman Dose and Risk17
2.4.3.1 Creek-Mouth Fish Consumption Pathway17
2.4.3.2 Savannah River Swamp Fisherman Soil Exposure Pathway17
2.4.3.3 Potential Risk from Consumption of SRS Creek-Mouth Fish
2.4.3.4 Risk Comparison
3.0 Release of Material Containing Residual Radioactivity
3.1 Property Release Methodology
4.0 Radiation Dose to Aquatic and Terrestrial Biota
4.1 DOE Biota Concentration Guides
5.0 References
Appendix A

LIST OF TABLES

Table 1-1. SRS Representative and Typical Person Usage Parameters
Table 2-1.2023RadioactiveLiquidReleasesand12-MonthAverageDownriverRadionuclideConcentrationsCompared to the EPA's DrinkingWater Maximum Contaminant Levels (MCL)10
Table 2-2. Potential Dose to the Representative Person from SRS Liquid Releases in 2023 10
Table 2-3. Potential Doses to the Representative Person and to the NESHAP MEI from SRS Atmospheric Releases in 2023 and Comparison to the Applicable Dose Standard
Table 2-4. 2023 Representative Person All-Pathways and Sportsman Doses Compared to the DOE All-Pathways Dose Standard
Table 2-5. Potential Lifetime Risks from the Consumption of Savannah River Fish Compared to Dose Standards

LIST OF FIGURES

Figure 1-1. Exposure Pathways to Humans from Atmospheric and Liquid Effluents
Figure 1-2. Locations of the SRS Representative Persons for Air and Liquid Releases and the MEI Locations for NESHAPS
Figure 1-3. 2014-2018 Wind Rose for H-Area (Direction is toward which the wind blows)7
Figure 1-4. Savannah River Annual Average Flow Rates at River Mile 118.8
Figure 2-1. Radionuclide Contributions to the 2023 SRS Representative Person Total Liquid Pathway Dose of 0.14 mrem (0.0014 mSv)
Figure 2-2. Radionuclide Contributions to the 2023 SRS Air Pathway Dose of 0.016 mrem (0.00016 mSv)
Figure 2-3. Sector-specific Representative Person Site Boundary Doses
Figure 2-4. Ten-Year History of SRS Maximum Potential All-Pathway Dose16
Figure 2-5. History of SRS Maximum Potential Fisherman Doses and 30-y Projected Risks

LIST OF ABBREVIATIONS

ALARA	As Low as Reasonably Achievable
BCG	Biota Concentration Guide
BJWSA	Beaufort-Jasper Water and Sewer Authority
BLLDF	Barnwell Low-Level Disposal Facility
COS	Center of Site
DOE	U. S. Department of Energy
EPA	U. S. Environmental Protection Agency
FGR	Federal Guidance Report
GDNR	Georgia Department of Natural Resources
ICRP	International Commission on Radiological Protection
MCL	Maximum Contaminant Levels
MEI	Maximally Exposed Individual
NESHAP	National Emissions Standards for Hazardous Air Pollutants
NRC	Nuclear Regulatory Commission
RM	River Mile
SCDHEC	South Carolina Department of Health and Environmental Control
SRNL	Savannah River National Laboratory
SRS	Savannah River Site
TRL	Three Rivers Landfill
USGS	U. S. Geological Survey
VEGP	Georgia Power Company's Vogtle Electric Generating Plant

Introduction

This report presents environmental dose assessment methods and the estimated potential doses to the public from 2023 Savannah River Site (SRS) atmospheric and liquid radioactive releases. It also documents potential doses from special-case exposure scenarios, such as the consumption of wildlife and/or goat milk. Unless noted, the generic term "dose," as used in this report, includes both the committed effective dose (50-year committed dose) from internal deposition of radionuclides and the effective dose attributable to sources external to the body. Using the effective dose allows doses from different types of radiation and to different parts of the body to be expressed on the same basis.

Humans, plants, and animals potentially receive radiation doses from natural and man-made occurrences. The average annual "background" dose for all people living in the United States is 625 mrem. This includes an average background dose of 311 mrem from naturally occurring radionuclides (found in our bodies and in the earth) and from cosmic radiation. Man-made sources include medical procedures (300 mrem), consumer products (13 mrem), and industrial and occupational exposures (less than 1 mrem) (NCRP 2009).

The U.S. Department of Energy (DOE) has established dose limits to the public, so that DOE operations will not contribute significantly to this average annual exposure. DOE Order 458.1 (DOE 2020) establishes 100 mrem/yr (1mSv/yr) as the annual dose limit to a member of the public. As shown in Figure 1-1, radiation exposure primarily occurs through the following pathways:

Inhalation, Ingestion, Skin absorption, and Direct (external) exposure to radionuclides in soil, air, and water.

1.0 Dose Assessment Methods

DOE Order 458.1 states that compliance with the DOE annual dose limit of 100 mrem (1 mSv), for a member of the public, may be demonstrated by calculating dose to the maximally exposed individual (MEI) or to a representative person. Prior to 2012, SRS used the MEI concept for dose compliance which is based on adult dose coefficients and adult male usage parameters. Beginning in 2012, SRS now uses the representative person concept for dose compliance.

1.1 <u>Representative Person</u>

DOE Order 458.1 defines the representative person as an individual receiving a dose that is representative of the more highly exposed individuals in the population. This term is equivalent of and replaces the "average member of the critical group." However, in the *International Commission on Radiological Protection* (ICRP) *Report 101* (ICRP 2006), the definition is extended to include the average value for the more highly exposed group or the 95th percentile of appropriate national or regional data. At SRS, the representative person who is at the 95th percentile of national usage data is now used as a replacement for the MEI. SRS believes the representative person concept is superior to the MEI concept for dose calculations because it includes all members of the population receiving dose as opposed to only adult males (as is the case for the MEI concept).

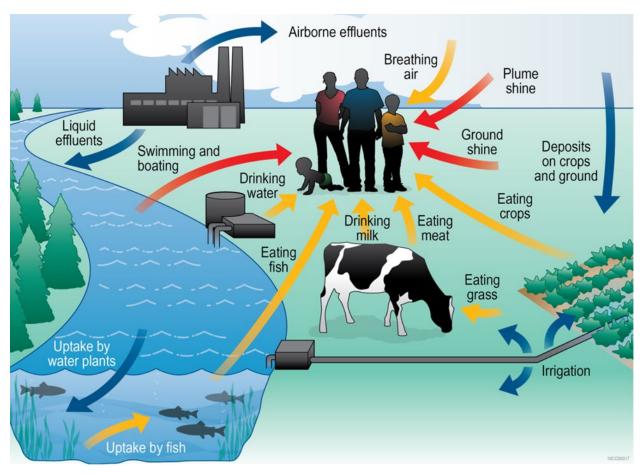


Figure 1-1. Exposure Pathways to Humans from Atmospheric and Liquid Effluents

The representative person dose is based on a reference person using exposure parameters (at the 95th percentile of national and regional data) developed specifically for SRS. The reference person is a hypothetical person with average physical and physiological characteristics— including factors such as age and gender—used internationally to standardize radiation dose calculations. The reference person is weighted, based on sex and age, and this weighting is based on the six age groups documented in Report 89 (ICRP 2002): infant (0 years), 1 year, 5 years, 10 years, 15 years, and adult. The EPA (2011) proportioned the various age- and gender-specific intake rates to correspond with these respective age groupings. The SRS-specific reference person usage parameters were developed using methods described in Stone and Jannik (2013) and are provided in Table 1-1. The applicable national and regional data used are from the Environmental Protection Agency (EPA) *Exposure Factors Handbook (Final Report)* (EPA 2011) and recently updated chapters (EPA 2018, 2019). SRS also developed reference usage parameters at the 50th percentile to calculate dose to a "typical" person for determining collective (population) doses.

The Land and Water Use Characteristics and Human Health Input Parameters for use in Environmental Dosimetry and Risk Assessments at the Savannah River Site (Stagich 2021) documents all other applicable land- and water- use parameters used in the dose calculations. These parameters include local characteristics of food production, river recreational activities, and other human usage parameters required in the SRS dosimetry models. In addition, SRS documents the preferred elemental bioaccumulation and transfer factors to be used in human health exposure calculations in this land and water report. Data Table A-1 and Data Table A-2 provide a summary of the site-specific input parameters that are the most important to the dose calculations for the liquid and airborne pathways, respectively.

	Unit	Representative Person	Typical Person
Air	m3/y	6,400	5,000 ^(a)
Water	L/y	800	300 ^(b)
Meat	kg/y	81	32 ^(c)
Leafy Vegetables	kg/y	31	11
Other Produce	kg/y	289	89
Milk/Dairy	L/y	260	69
Freshwater Fish	kg/y	24	3.7
Saltwater Invertebrate	kg/y	N/A	1.5
a. 1 cubic meter = 1.3 cubic yards			
b. 1 liter = 1.06 quarts			
c. $1 \text{ kilogram} = 2.2 \text{ pounds}$			

Table 1-1. SRS Representative and Typical Person Usage Parameters

In 2017, SRS made two major changes in the locations of the representative person:

- For the liquid pathway, the representative person was moved from river mile (RM) 118.8 (near US Hwy 301 bridge) to RM 141.5, which is slightly downriver from the Steel Creek mouth. The historical location at RM 118.8 is downriver of all SRS streams. However, SRS radiological releases into Lower Three Runs are 1) from legacy contamination and not current operations and 2) have remained small for many years. Moving the representative person to near Steel Creek is more conservative because it accounts for less dilution and gives a better indication of the potential dose from fish.
- 2) For the air pathway, in addition to the offsite representative person living near the Site boundary, SRS also calculated potential dose for an adult worker at the Three Rivers Landfill (TRL) located near B Area. Three Rivers Landfill is located on SRS, but it is accessed directly from public South Carolina Hwy 125 outside of the Site's security perimeter in Aiken County. The workers at Three Rivers Landfill are not Site employees and are now considered members of the public to comply with DOE Order 458.1 and with National Emissions Standards for Hazardous Pollutants Compliance (NESHAP) regulations (EPA 2006). Figure 1-2 shows the SRS representative locations.

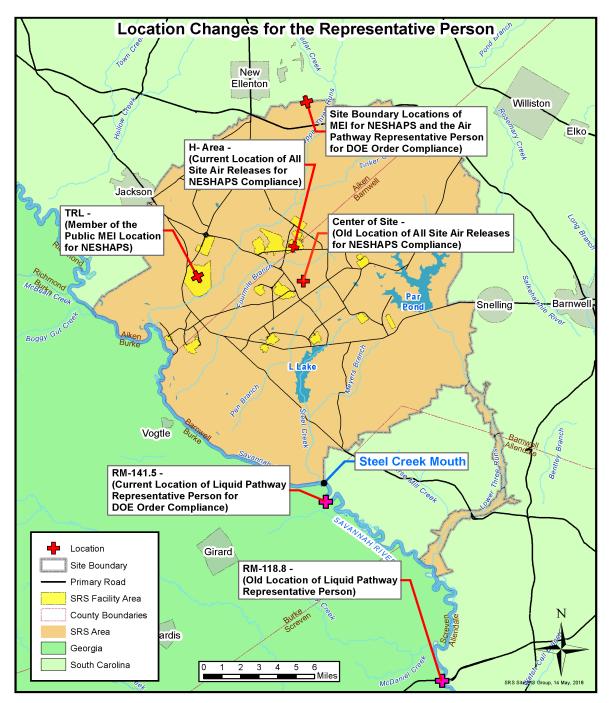


Figure 1-2. Locations of the SRS Representative Persons for Air and Liquid Releases and the MEI Locations for NESHAPS

1.2 Dose Models

SRS calculates the potential offsite doses from SRS effluent releases of radioactive materials (air and liquid) for the following scenarios for DOE public dose compliance:

Representative person living at the SRS boundary

Industrial worker at the Three Rivers Landfill located on SRS (near B Area) Population living within a 50-mile (80-kilometer [km]) radius of SRS's H-Area To demonstrate compliance with the DOE Order 458.1 all-pathway dose standard of 100 mrem per year, SRS conservatively combines the air pathway and liquid pathway dose estimates, even though the two doses are calculated for hypothetical individuals residing at different geographic locations (Figure 1-2).

For SRS dose calculations, unspecified alpha releases were treated as plutonium-239, and unspecified beta releases as strontium-90. These radionuclides have the highest dose factors of the alpha- and beta-emitters, respectively, commonly measured in SRS waste streams.

SRS has assessed the potential effects of routine radioactive releases annually since operations began and, since 1972, has published annual offsite dose estimates in Site environmental reports made available to the public. For all routine environmental dose calculations performed since 1978, SRS has used environmental transport models based on the Nuclear Regulatory Commission (NRC) developed codes (NRC 1977). The NRC-based transport models use DOE accepted methods, consider all significant exposure pathways, and permit detailed analysis of the effects of routine operations.

For showing compliance with DOE Order 458.1 at SRS, the MAXDOSE-SR and POPDOSE-SR codes are used for air releases (representative person and population, respectively) and LADTAP XL[©] is used for liquid releases. The *SRS Environmental Dose Assessment Manual* (Stagich 2023) describes these models.

To demonstrate compliance with EPA National Emission Standards for Hazardous Air Pollutants (NESHAP) regulations (EPA 2006), SRS calculated the MEI and collective doses using 1) the CAP88 PC version 4.1.0.2 computer code, 2) the 2023 airborne-release source term (Data Table A-23), and 3) site-specific input parameters (Data Table A-24). The EPA requires the use of the MEI concept and does not allow use of the representative person concept at this time. The SRS MEI locations for NESHAPS are shown in Figure 1-2.

The EPA hard-codes most of the input parameters in the CAP88 PC program, and they cannot be changed without EPA approval. SRS uses the latest version of CAP88-PC (v.4.1.0.2) that became available from EPA in January 2020 (Stagich 2020). CAP88-PC v.4.1.0.2 includes improvements to the user interface and system capabilities. Additionally, EPA updated the radionuclide physical data, dose factors, risk factors and decay chain information from the DCFPAK Version 2.2. to the DCFPAK 3.02, both provided by Oak Ridge National Laboratory (Eckerman and Leggett 2013).

CAP88-PC allows up to six different stack heights per release. For the stack height inputs at SRS, the reference heights related to operational stack heights in the tritium production facilities located in H Area were used; 0m, 15m, 21m, 31m, 56m, 59m. If there were emissions from other areas on site at a stack height not in the six previously listed, the stack height was defaulted to the shorter stack height, as shorter stack heights produce a higher estimated dose (Minter et al. 2018).

1.3 Dose Coefficients

From 1988 through 2009, SRS used the internal and external dose conversion factors provided in DOE (1988). In 2010, the internal dose conversion factors were updated to use the dose factors from ICRP Publication 72 (ICRP 1996), and the external dose conversion factors were updated to the dose factors provided in *Federal Guidance Report 12* (FGR) (EPA 1993). In 2012, SRS changed to the reference person concept and started using the (gender- and age-averaged) ingestion and inhalation dose coefficients documented in *DOE Derived Concentration Technical Standard*, DOE-STD-1196-2011 (DOE 2011). In 2019, SRS started using the external dose factors from FGR 15 (EPA 2019). FGR 15 is a revision to FGR 12 that incorporated age-specific external dose coefficients. SRS used the age-specific values to develop "reference person" external dose coefficients in a method similar to that documented in DOE (2011). The SRS report *Updated External Exposure Dose Coefficients*, SRNL-L3200-2020-00014 (Laird and Jannik 2020) documents the external dose coefficients used.

For 2023, the dose to a representative person is based on: 1) the SRS-specific reference person usage parameters at the 95th percentile of appropriate national or regional data based on Stone and Jannik (2013), 2) the reference person (gender- and age-averaged) ingestion and inhalation dose coefficients documented in *DOE Derived Concentration Technical Standard*, DOE-STD-1196-2022 (DOE 2022), and 3) the external dose coefficients derived from *Federal Guidance Report 15* (EPA 2019).

1.4 Meteorological Database

SRS calculated the potential offsite doses from radiological releases to the air with quality-assured meteorological data for A-Area, K-Area, K-Area (for combined releases from C-Area, K-Area, and L-Area), and H-Area (for combined releases from all other areas) for DOE compliance. To show compliance with NESHAP regulations (EPA 2006), only the H-Area meteorological database was used in the calculations, because the EPA-required dosimetry code (CAP88 PC version 4.1.0.2) is limited to a single release location.

The current five-year meteorological datasets used in dose calculations cover the period 2014 through 2018 (Bell 2020). These datasets differ from previous five-year datasets in that they now 1) estimate atmospheric stability using the standard deviation of the vertical wind velocity and 2) use an updated surface roughness factor for SRS. Data Table A-3 shows the 2014-2018 meteorological database for H-Area. Figure 1-3 is the H-Area wind rose for 2014-2018, with the directions shown being those toward which the wind blows. As shown, the wind blows towards the East-Northeast the highest percentage of time (about 10%).

1.5 Population Database and Distribution

SRS calculates the collective (population) doses from air releases for the population within a 50-mile radius of H-Area, which is the location of most of the Site's radiological releases. Based on the U.S. Census Bureau's 2020 data, the population within a 50-mile radius of H-Area is 838,833. This translates to an average population density of about 107 people per square mile outside the SRS boundary, with the largest concentration in the Augusta metropolitan area. Data Table A-4 show the population distribution around H-Area.

SRS also calculates the collective doses resulting from SRS liquid releases for the populations served by the City of Savannah Industrial and Domestic Water Supply Plant (City of Savannah I&D), near Port Wentworth, Georgia, and for the Beaufort-Jasper Water and Sewer Authority's (BJWSA) Chelsea and Purrysburg Water Treatment Plants, both near Beaufort, South Carolina. According to the treatment plant operators, the population served by the City of Savannah I&D facility during 2023 was 70,000 people while the BJWSA Chelsea facility served 108,000 people and the BJWSA Purrysburg facility served 86,700 people. The total population dose resulting from routine SRS liquid releases is the sum of five contributing categories: 1) BJWSA water consumers, 2) City of Savannah I&D water consumers, 3) consumption of fish and invertebrates of Savannah River origin, 4) recreational activities on the Savannah River, and 5) irrigation of foodstuffs using river water near River Mile (RM) 141.5 (Down river near the Steel Creek mouth).

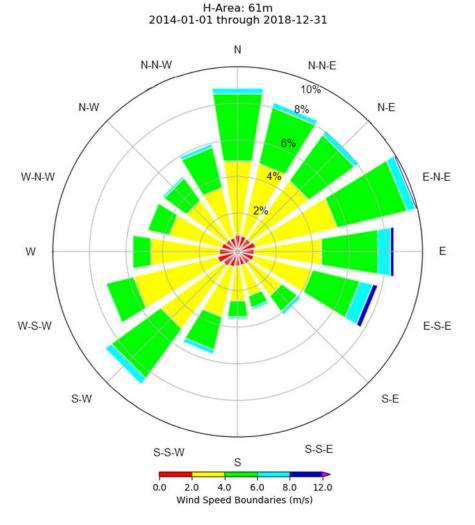


Figure 1-3. 2014-2018 Wind Rose for H-Area (Direction is toward which the wind blows)

1.6 Savannah River Flow Rate Data

SRS determines the Savannah River annual average flow rates using the recorded water elevation at a U.S. Geological Survey (USGS) gauging station #02197500, near RM 118.8. Data Table A-5 provides river flow rates measured at this location from 1954 through 2023. Figure 1-4 shows that the average river flow rate for these years is about 10,011 cubic feet per second (cfs). Apart from 2020, there has been a downward trend in these data, with an average measured flow rate of 9,932 cfs during the past 10 years.

The SRS liquid dose calculations typically do not use these data. Instead, SRS uses an "effective" flow rate based on 1) the measured annual release of tritium and 2) the annual average tritium concentrations measured from RM 141.5 and from the downriver water treatment plants. Data Table A-6 provides the effective river flow rate calculations.

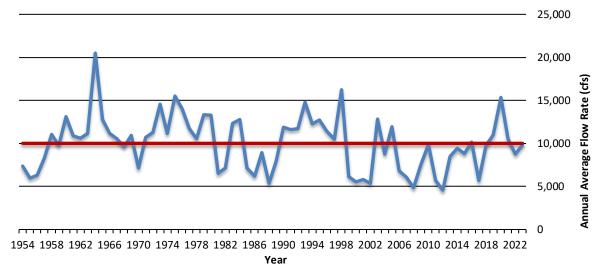


Figure 1-4. Savannah River Annual Average Flow Rates at River Mile 118.8

The effective flow rates used in the dose calculations are usually more conservative (that is, lead to higher dose estimates) than the measured flow rates because it accounts for less dilution. However, if SRS calculates an effective flow that is more than the measured value at RM 118.8, then the measured value is used.

For 2023, SRS used an effective Savannah River flow rate of 7,939 cfs in the dose calculations. The 2023 effective flow rate is 10% more than the 2022 effective flow rate of 7,230 cfs. This estimated flow rate (based on actual measured tritium concentrations in the river) is more conservative than the 2023 USGS measured flow rate (at RM 118.8) of 9,895 cfs.

2.0 Dose Calculation Results

2.1 Liquid Pathway Doses

No known large-scale uses of Savannah River water downstream of SRS exist for agricultural irrigation purposes. However, the potential for agricultural irrigation does exist, especially for individual garden use. Therefore, the totals for the SRS representative person and collective dose include doses from the irrigation pathway.

2.1.1 Liquid Release Source Terms

Table 2-1 shows, by radionuclide, the 2023 radioactive liquid release quantities used as the source term in SRS dose calculations and Data Table A-7 shows these liquid releases by Site stream. Data Table A-8 provides a five-year history of SRS liquid radioactive releases.

Tritium accounts for more than 99% of the total amount of radioactivity the Site released to the Savannah River. In 2023, SRS released a total of 378 curies of tritium to the river, a 9% increase from the 2022 amount of 348 curies.

In 2023, the Georgia Power Company's Vogtle Electric Generating Plant (VEGP) released 2,183 curies of tritium to the Savannah River and 16.4 curies migrated from the Barnwell Low-Level Disposal Facility (BLLDF) for an overall total of 2,779 curies of tritium (SRS plus VEGP plus BLLDF). This is a 79% increase from the combined total of 1,556 curies in 2022.

2.1.2 Radionuclide Concentrations in Savannah River Water, Drinking Water, and Fish

At several locations along the Savannah River, SRS measures the tritium concentrations in the river water and cesium-137 in fish. SRS uses these measurements to make dose determinations. The amounts of all other radionuclides released from SRS are so small that their concentration in the Savannah River usually cannot be detected using conventional analytical techniques. SRS calculates concentrations in the river based on the annual release amounts and river flow rates using the LADTAP XL code, version 2022 (Peyton and Stagich 2022).

2.1.2.1 Radionuclide Concentrations in River Water and Treated Drinking Water

Table 2-1 shows the measured tritium concentrations in the Savannah River near RM 141.5 and at the BJWSA Purrysburg Water Treatment Facility, which is representative of the BJWSA Chelsea and the City of Savannah I&D water treatment plants. These downriver tritium concentrations include tritium releases from SRS, VEGP, and BLLDF. Table 2-1 also provides the calculated concentrations for the other released radionuclides and a comparison of these concentrations to the Safe Drinking Water Act, 40 CFR 141 (EPA 2000) maximum contaminant level (MCL) for each radionuclide.

In 2023, the 12-month average tritium concentration measured in Savannah River water near RM 141.5 was 392 picocuries per liter (pCi/L). This reflects a 63% increase from the 241 pCi/L measured in 2022. SRS attributes this increase to the 79% increase in the combined (SRS plus VEGP plus BLLDF) total of tritium released to the Savannah River in 2023.

Table 2-1 indicates that all individual radionuclide concentrations at the three downriver community drinking water systems, as well as at RM 141.5, were below the EPA MCLs. Because SRS releases more than one radionuclide, the sum-of-the-fractions of the reported concentration of each radionuclide divided by its corresponding MCL must not exceed 1.0. As Data Table A-9 shows, the sum-of-the-fractions for the water treatment plants (determined at the BJWSA Purrysburg plant) was 0.0251, which is below the 1.0 sum-of-the-fractions requirement.

2.1.2.2 Radionuclide Concentrations in Fish

At SRS, an important dose pathway for the representative person is from the consumption of fish. Fish exhibit a high degree of bioaccumulation for certain elements. For cesium (including radioactive isotopes of cesium, such as cesium-137), the bioaccumulation factor for Savannah River fish is 3,000, meaning that the concentration of cesium in fish flesh is about 3,000 times the concentration of cesium found in the water in which the fish live (Carlton et al. 1994).

Because of this high bioaccumulation factor, SRS can detect cesium-137 more easily in fish flesh than in river water. Therefore, when conservative to do so, SRS will base the fish pathway dose from cesium-137 directly on the analysis of the fish collected near RM 141.5, the assumed location of the hypothetical representative person. As shown in Data Table A-10, the 2023 cesium-137 release value of 0.167 Ci is based on analysis of fish in the river.

	12-Month Average Concentration (pCi/L)			
Nuclide	Curies Released	Below SRS ^(a)	at BJWSA Purrysburg Plant ^(b)	EPA MCL ^(c)
H-3 ^(d)	2.78E+03	3.92E+02	3.75E+02	2.00E+04
C-14	4.11E-03	5.79E-04	5.54E-04	2.00E+03
Sr-90	1.90E-02	2.67E-03	2.56E-03	8.00E+00
Tc-99	1.24E-02	1.75E-03	1.68E-03	9.00E+02
I-129	1.45E-02	2.04E-03	1.95E-03	1.00E+00
Cs-137	1.67E-01	2.36E-02	2.26E-02	2.00E+02
U-234	5.80E-02	8.18E-03	7.82E-03	1.03E+01
U-235	4.04E-03	5.70E-04	5.45E-04	4.67E-01
U-238	6.97E-02	9.83E-03	9.40E-03	1.00E+01
Np-237	3.60E-05	5.07E-06	4.85E-06	1.50E+01
Pu-238	2.52E-04	3.55E-05	3.40E-05	1.50E+01
Pu-239	8.96E-05	1.26E-05	1.21E-05	1.50E+01
Am-241	2.35E-04	3.31E-05	3.17E-05	1.50E+01
Cm-244	1.47E-04	2.08E-05	1.99E-05	1.50E+01
Alpha	1.54E-02	2.18E-03	2.08E-03	1.50E+01
Beta	5.73E-02	8.08E-03	7.73E-03	8.00E+00
a. Near Savanna	h River Mile 141.5, dow	nriver of SRS		

Table 2-1. 2023 Radioactive Liquid Releases and 12-Month Average Downriver Radionuclide Concentrations Compared to the EPA's Drinking Water Maximum Contaminant Levels (MCL)

Near Savannah River Mile 141.5, downriver of SRS a.

b. Beaufort-Jasper Water and Sewer Authority, drinking water at the Purrysburg Plant

MCLs for uranium based on radioisotope specific activity X 30 µg/L X isotopic abundance c.


d. The tritium concentrations and source term are based on actual measurements of the Savannah River water at the various locations. They include contributions from VEGP and Barnwell Low-Level Disposal Facility. All other radionuclide concentrations are calculated based on the effective or measured river flow rate.

2.1.2.3 Dose to the Representative Person

Data Table A-11 shows the 2023 dose to the representative person from all liquid pathways, including irrigation, was estimated at 0.14 mrem (0.0014 mSv), which is a 18% decrease from the 0.17 mrem dose in 2022. Table 2-2 shows that this total dose is 0.14% of the all-pathway public dose standard of 100 mrem/yr (1 mSv/yr).

	Committed Dose (mrem)	Applicable Standard (mrem)	Percent of Standard (%)
Near Site Boundary (All Liqui	d Pathways)		
All Liquid Pathways Except Irrigation	0.10		
Irrigation Pathways	0.047		
Total Liquid Pathways	0.14	100 ^(a)	0.14
a. All-pathway dose standard: 100	mrem/yr (DOE Order 458	3.1)	

About 32% of the 2023 all liquid pathways total dose to the representative person resulted from the irrigation pathway (Data Table A-11). This pathway is based on the ingestion of meat, milk, and vegetables that have been exposed to irrigation water from the Savannah River. The fish consumption pathway, based on concentrations in fish from Steel Creek, accounted for 60% and the drinking water pathway accounted for 7%. Figure 2-1 shows, cesium-137 (65%), nonvolatile beta (8%), tritium (5%), uranium-234 (5%) and

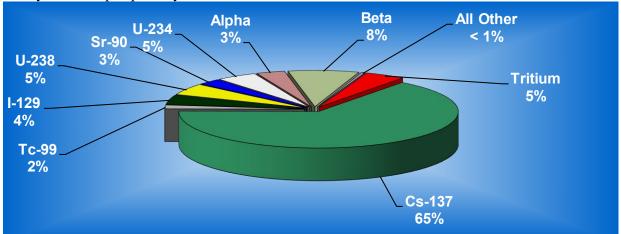

uranium-238 (5%) were the major contributors to the total dose. Data Table A-12 provides a five-year history of SRS liquid pathway doses.

Figure 2-1. Radionuclide Contributions to the 2023 SRS Representative Person Total Liquid Pathway Dose of 0.14 mrem (0.0014 mSv)

2.1.2.4 Drinking Water Pathway Dose

People living downriver of SRS may receive some dose by consuming drinking water that contains radioactive releases from the Site and from VEGP and BLLDF. In 2023, SRS estimated the maximum potential drinking water dose from all sources to be 0.035 mrem (0.00035 mSv). Tritium in downriver drinking water represented the highest percentage of the dose (about 81%) to customers of the three downriver water treatment plants.

Data Table A-13 shows the 2023 SRS-only releases were responsible for a maximum potential drinking water dose of 0.010 mrem (0.00010 mSv). This dose is 9% less than the 2022 dose of 0.011 mrem (0.00011 mSv). SRS attributes this decrease to decreases in cesium-137, uranium-234, and uranium-238 liquid releases during 2023. DOE and EPA do not have a specific regulatory drinking water dose standard, but the EPA MCLs, defined in 40 CFR 141 (EPA 2000), assume a potential dose of 4 mrem/yr for beta and gamma emitters. The 2023 maximum drinking water dose of 0.010 mrem is well below this value.

2.1.2.5 Collective (Population) Dose

SRS calculates the collective drinking water consumption dose for the separate population groups that the BJWSA and City of Savannah I&D water treatment plants serve (Data Table A-14).

Calculations of collective doses from agricultural irrigation assume that 1,000 acres of land are used for each of the major food types grown in the SRS area (vegetables, milk, and meat) with the population within 50 miles of SRS consuming all the food produced on these 1,000-acre parcels. Historically, SRS limited the food consumption pathway dose to the smaller of 1) the total foodstuffs actually produced in the SRS 50-mile radius or 2) the total foodstuffs produced on the 1,000-acre parcels (based on regional productivity rates) (Stagich 2021). The total amount of foodstuff produced in the SRS area (which is difficult to determine because of under reporting by small farms and individual gardens) has typically been less than the amount produced on 1,000-acre parcels. Beginning in 2016, SRS now conservatively uses only the amount produced on the 1,000-acre irrigated parcels for collective dose estimates.

In 2022, the collective dose from all liquid pathways was 2.3 person-rem (0.023 person-Sv) (Data Table A-15). Person-rem is calculated as the dose to a "typical" person multiplied by the number of people exposed. This is a 15% increase from the comparable 2022 collective dose of 2.0 person-rem

(0.020 person-Sv). DOE Order 458.1 requires that a collective dose be calculated and reported, but there is not a separate collective dose standard for comparison.

2.2 Air Pathway Doses

2.2.1 Atmospheric Source Terms

Data Table A-16 documents the 2023 SRS radiological air releases by Site area. Data Table A-17 provides a five-year history of SRS atmospheric releases, and it shows that tritium oxide releases, which account for a majority of the offsite doses, increased about 2% from 2022 to 2023. Estimates of unmonitored diffuse and fugitive sources were included in the atmospheric source term, as required for demonstrating compliance with EPA regulations.

2.2.2 Atmospheric Concentrations

For dose determinations, SRS uses calculated radionuclide concentrations from standard modeling of measured effluent releases instead of measured concentrations in the air surveillance samples. This is because most radionuclides SRS released in 2023 were not detected (using conventional analytical methods) in the air samples collected at the Site perimeter and offsite locations. The exception to this is tritium oxide, which can be measured at the site perimeter locations. Therefore, to confirm the dose models, SRS compares the measured concentrations of tritium oxide with the calculated concentrations from CAP88 PC and MAXDOSE. In Data Table A-18, this comparison showed that in 2023 the dose models used at SRS were about 2 times more conservative than the measured tritium oxide concentrations.

2.2.3 Dose to the Representative Person

As shown in Data Table A-19a, the 2023 estimated dose from air releases to the representative person was 0.016 mrem (0.00016 mSv), 0.16% of the DOE Order 458.1 air pathway standard of 10 mrem per year.

Table 2-3 compares the representative person dose with the DOE standard. The 2023 dose was the same as the 2022 dose of 0.016 mrem (0.00016 mSv).

In 2017, SRS began to calculate the potential dose for an adult worker at the Three Rivers Landfill near B Area. As shown in Figure 1-2, Three Rivers Landfill is located on SRS, but it is accessed directly from public Hwy 125 outside of the Site's security perimeter. The workers at Three Rivers Landfill are not Site employees and are now considered members of the public to comply with DOE Order 458.1.

For this assessment, SRS assumed that an adult person worked at Three Rivers Landfill for 2000 hours during the year (8 hours/day, 5 days/week, 50 weeks/year). SRS also assumed that this worker was only exposed from the inhalation and external-exposure pathways. No locally grown food consumption was considered at this industrial location.

For 2023, SRS calculated a potential dose to a Three Rivers Landfill worker of 0.011 mrem (0.00011 mSv). This dose is less than the representative person dose of 0.016 mrem that was reported for DOE Order 458.1 compliance. Data Table A-19b shows the results of these calculations.

	MAXDOSE-SR Site Boundary DOE 458.1	CAP88-PC (EPA NESHAP) Site Boundary	CAP88-PC (EPA NESHAP) TRL Worker
Calculated dose (mrem)	0.016	0.026	0.028
Applicable Standard (mrem)	10 ^(a)	10 ^(b)	10 ^(a)
Percent of Standard (%)	0.16	0.26	0.28
a. DOE: DOE Order 458.1b. EPA: (NESHAP) 40 CFR 61, Sub	part H		

Table 2-3. Potential Doses to the Representative Person and to the NESHAP MEI from SRS
Atmospheric Releases in 2023 and Comparison to the Applicable Dose Standard

As shown in Figure 2-2, tritium oxide releases accounted for nearly 72% of the dose to the representative person. Iodine-129 contributed 16% to the dose while krypton-85 and cesium-137 contributed 8% and 2%, respectively. Strontium-90 contributed about 1%. No other individual radionuclide accounted for more than 1% of the representative person dose. Data Table A-19a shows that the major pathways through which a representative person received radioactivity from atmospheric releases were vegetable consumption (35%), inhalation (32%), and cow milk consumption (21%). As shown in Data Table A-20 and in Figure 2-3, the due north sector (0.0162 mrem) of the Site was slightly higher than the north-northwest sector (0.0152 mrem) making it the location of the highest dose to the representative person.

Because of the potential in the SRS vicinity for the consumption of goat milk, additional calculations of the dose to the representative person were performed substituting goat milk for the customary cow milk pathway. As shown in Data Table A-21, SRS estimated that the potential dose to the representative person using the goat milk pathway is 0.018 mrem (0.00018 mSv). SRS provides this dose for reference only.

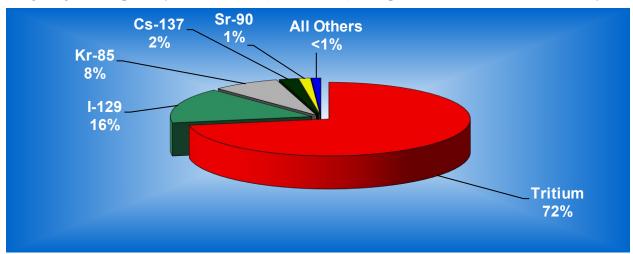


Figure 2-2. Radionuclide Contributions to the 2023 SRS Air Pathway Dose of 0.016 mrem (0.00016 mSv)

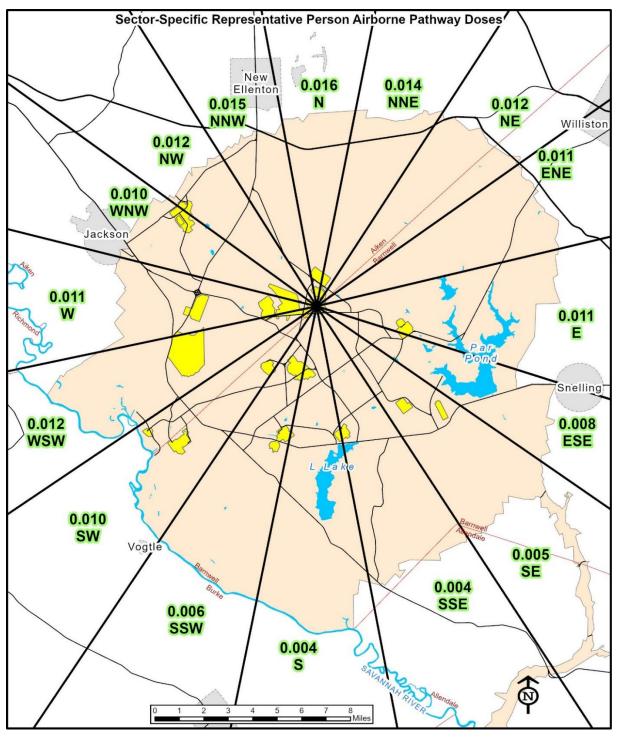


Figure 2-3. Sector-specific Representative Person Site Boundary Doses

2.2.4 Collective (Population) Dose

SRS calculates the air-pathway collective dose for the entire 838,833 population living within 50 miles of SRS's H-Area. Data Table A-4 shows the population distribution around H-Area.

In 2023, SRS estimated the air-pathway collective dose at 0.73 person-rem (0.0073 person-Sv), which is less than 0.01% of the annual collective dose from natural sources of radiation (about 234,000 person-rem).

Data Table A-22 shows the 2023 air-pathway collective doses by radionuclide and pathway. Tritium oxide releases accounted for 75% of the collective dose.

2.2.5 National Emission Standards for Hazardous Air Pollutants (NESHAP) Compliance

2.2.5.1 Maximally Exposed Individual Dose

To demonstrate compliance with NESHAP regulations (EPA 2006), SRS calculated MEI and collective doses using 1) CAP88 PC version 4.1.0.2 computer code, 2) the 2023 air-release source term shown in Data Table A-23, and 3) Site-specific input parameters shown in Data Table A-24. The EPA requires the use of the MEI concept and does not allow use of the representative person concept. The EPA specifies most of the input parameters in the CAP88 PC program; they cannot be changed without specific EPA approval.

For 2023, SRS used CAP88 PC (version 4.1.0.2, dated January 2020) to demonstrate compliance with the EPA's 10 mrem/yr (0.1 mSv/yr) public dose standard for airborne emissions from DOE sites. For 2023, the Site boundary MEI dose (Data Table A-25a) was estimated at 0.0263 mrem (0.000263 mSv), or 0.26% of the 10-mrem/yr EPA standard, as shown in Table 2-3.

SRS estimated the MEI dose for the Three Rivers Landfill worker (Data Table A-25b) to be 0.0277 mrem (0.000277 mSv). For 2023, SRS reported the slightly higher TRL worker dose of 0.0277 mrem for NESHAP compliance. This dose is 0.28% of the 10-mrem/yr EPA standard, as Table 2-3 shows.

Data Table A-25a shows tritium oxide releases accounted for about 48% of the MEI dose and elemental tritium accounted for 14%. The CAP88 PC model very conservatively treats elemental tritium the same as tritium oxide. The 2023 NESHAP compliance dose (TRL dose) was about 10% less than the 2022 dose of 0.0307 mrem (0.000307 mSv). NESHAP regulations require separate dose reporting from diffuse and fugitive releases. Data Table A-26a shows the MEI dose for the TRL worker from diffuse and fugitive releases was about 0.00113 mrem (0.0000113 mSv). The diffuse and fugitive releases account for about 4% of the total 2023 MEI dose. Data Table A-26b provides the MEI dose and the TRL Worker location from diffuse and fugitive releases.

2.2.5.2 Collective Dose


The CAP88 PC-determined collective (population) dose for 2023 was estimated at 2.2 person-rem (0.022 person-Sv), which is 12% less than the 2022 collective dose of 2.5 person-rem (0.025 person-Sv). Tritium releases accounted for 74% of the NESHAP collective dose.

For the population dose (Data Table A-28), the CAP88 PC version 4.1.0.2 estimates a higher dose compared to POPDOSE-SR, mainly because 1) it assumes the general population has the same inhalation and consumption rates as the maximally exposed individual, and 2) it assumes a one-to-one ratio between tritium oxide in air and tritium oxide in plant leaves (whereas POPDOSE-SR assumes a 50% ratio).

2.3 <u>All-Pathway Dose</u>

As stated in DOE Order 458.1, the all-pathway dose standard is 100 mrem/yr. SRS ensures a conservative estimate by combining the representative person airborne pathway and liquid pathway dose estimates, even though the two estimated doses are for hypothetical individuals residing at different geographic locations (Figure 1-2).

For 2023, the potential representative person all-pathway dose was 0.16 mrem (0.0016 mSv), calculated as 0.016 mrem from air pathways plus 0.14 mrem from liquid pathways. The all-pathway dose is 0.16% of the 100 mrem/yr (1 mSv/yr) DOE dose standard. The 2023 all-pathway dose is about 13% less than the 2022 total dose of 0.18 mrem (0.0018 mSv). Data Table A-12 provides a five-year history of the SRS all-pathway doses. Figure 2-4 shows a 10-year history of SRS's all-pathway (airborne, liquid, and irrigation pathways) doses to the MEI/representative person.

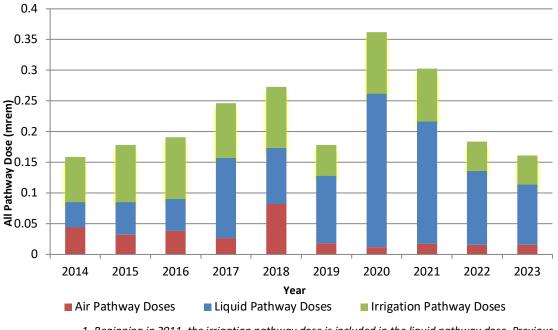

^{1.} Beginning in 2011, the irrigation pathway dose is included in the liquid pathway dose. Previous years do not include the irrigation pathway dose.

Figure 2-4. Ten-Year History of SRS Maximum Potential All-Pathway Dose

2.4 Sportsman Dose

DOE Order 458.1 specifies radiation dose standards for individual members of the public. The dose standard of 100 mrem/yr includes the dose a person receives from routine DOE operations through all exposure pathways. Additionally, SRS considers and quantifies unique exposure pathways that are not included in the standard calculations of the doses to the representative person. This is because they apply to unlikely scenarios, such as eating fish caught only from the mouths of SRS streams ("creek-mouth fish"), or to special scenarios, such as onsite volunteer hunters.

In addition to deer, hog, fish, and turkey consumption, SRS considered the following exposure pathways for an offsite hunter and an offsite fisherman on Creek Plantation, a privately-owned portion of the Savannah River Swamp.

- External exposure to contaminated soil,
- Incidental ingestion of contaminated soil, and
- Incidental inhalation of renewed suspension of contaminated soil.

2.4.1 Onsite Hunter Dose

2.4.1.1 Deer and Hog Consumption Pathway

SRS holds annual hunts for the public to control the Site's deer and wild pig populations and to reduce animal-vehicle accidents. The estimated dose from consuming harvested deer or hog meat is determined for every onsite hunter. During 2023, the maximum potential dose an onsite hunter received was 9.42 mrem (0.0942 mSv), or 9.42% of DOE's 100 mrem/yr dose standard (Table 2-4). This dose is for an actual hunter who harvested one animal (one deer) during the 2023 hunts (Data Table A-29). For the hunter-dose calculation, SRS conservatively assumes that the hunter individually consumed the entire edible portion of these animals, about 29 kilograms (kg) (64 lbs).

^{2.} Beginning in 2012, SRS began using the representative person dose instead of the MEI dose.

2.4.1.2 Turkey Consumption Pathway

SRS typically hosts a special turkey hunt during April for hunters with mobility impairments. Hunters harvested 19 turkeys in 2023. SRS measured all the turkeys for cesium-137. Since none of them measured above background, SRS did not assign a dose to these hunters.

2.4.2 Hypothetical Offsite Hunter Doses

2.4.2.1 Deer and Hog Consumption Pathway

The deer and hog consumption pathways considered were for hypothetical offsite individuals whose entire intake of meat (81 kg) during the year was either deer or hog meat. SRS assumes these individuals harvested deer or hogs that had resided on SRS during the year and then moved offsite prior to hunting season.

Based on these unlikely assumptions and on the measured average concentration of cesium-137 in all deer (1.80 pCi/g) and hogs (1.59 pCi/g) harvested from SRS during 2023, the potential maximum doses from this pathway were estimated at 5.30 mrem (0.0530 mSv) for the offsite deer hunter and 4.44 mrem (0.0444 mSv) for the offsite hog hunter. Data Table A-29 documents these dose calculations.

Beginning in 2013, a background cesium-137 concentration of 0.5 pCi/g is subtracted from the onsite average concentrations, before calculating the offsite hunter doses. The 0.5 pCi/g background concentration is based on the median value determined by South Carolina Department of Health and Environmental Control (SCDHEC) for South Carolina deer, from 2008 through 2012 (SCDHEC 2013).

2.4.2.2 Savannah River Swamp Hunter Soil Exposure Pathway

SRS estimated the potential dose to a recreational hunter exposed to SRS legacy contamination on the privately-owned Creek Plantation. SRS assumes that this recreational sportsman hunted for 120 hours during the year (8 hours per day for 15 days) at the location of maximum radionuclide contamination. Table 2-4 shows the offsite deer consumption pathway 5.30 mrem, and the Savannah River swamp hunter soil exposure pathway 1.86 mrem were conservatively added together to obtain a total offsite hunter dose of 7.16 mrem (0.0716 mSv). This potential dose is 7.2% of the DOE 100 mrem/yr all-pathway dose standard.

2.4.3 Hypothetical Offsite Fisherman Dose and Risk

2.4.3.1 Creek-Mouth Fish Consumption Pathway

For 2023, SRS analyzed four species of fish (panfish, catfish, flathead catfish, and bass) taken from the mouths of four SRS streams. Using these concentrations, SRS estimated the maximum potential dose from fish consumption at 0.172 mrem (0.00172 mSv) from bass collected at the mouth of Lower Three Runs. SRS bases this hypothetical dose on the low-probability scenario that, during 2023, a fisherman consumed 24 kg (53 lbs) of bass caught exclusively from the mouth of Lower Three Runs. All this potential dose was from cesium-137. Data Table A-30a and Data Table A-30b, respectively, show the measured concentrations and resulting doses for each location and species combination.

2.4.3.2 Savannah River Swamp Fisherman Soil Exposure Pathway

Using the RESRAD code (Yu et al. 2001), SRS calculated the potential dose to a recreational fisherman exposed to SRS legacy contamination in Savannah River Swamp soil on the privately-owned Creek Plantation. SRS assumes that this recreational sportsman fished on the South Carolina bank of the Savannah River, near the mouth of Steel Creek, for 250 hours during the year.

Using the radionuclide concentrations measured in soil at this location, SRS estimated the potential dose to a fisherman from a combination of 1) external exposure to the contaminated soil, 2) incidental ingestion of the soil, and 3) incidental inhalation of renewed suspension soil to be 2.08 mrem (0.00208 mSv).

Table 2-4 shows how SRS conservatively combined the maximum Steel Creek fish consumption dose (0.11 mrem) and the Savannah River Swamp fisherman soil exposure pathway (2.08 mrem) to obtain a total offsite fisherman dose of 2.19 mrem (0.0219 mSv). This potential dose is 2.2% of the DOE 100 mrem/yr all-pathway dose standard.

2.4.3.3 Potential Risk from Consumption of SRS Creek-Mouth Fish

During 1991 and 1992, in response to a U.S. House of Representatives Appropriations Committee request for a plan to evaluate risk to the public from fish collected from the Savannah River, SRS developed a fish monitoring plan in conjunction with the EPA, the Georgia Department of Natural Resources (GDNR), and SCDHEC. This plan ensures SRS assesses the radiological risk from the consumption of Savannah River fish and requires that SRS present a summary of the results in the SRS Annual Site Environmental Report.

Table 2-4. 2023 Representative Person All-Pathways and Sportsman Doses Compared to the DOE All-Pathways Dose Standard

	Committed Dose (mrem)	Applicable Standard (mrem) ^(a)	Percent of Standard (%)
Representative Person Dose			
All-Pathways (Liquid Plus Airborne Pathways)	0.16	100	0.16
Sportsman Dose			
Onsite Hunter	9.42	100	9.42
Creek-Mouth Fisherman ^(b)	0.17	100	0.17
Savannah River Swamp Hunter			
Offsite Hog Consumption	4.44		
Offsite Deer Consumption	5.30		
Soil Exposure ^(c)	1.86		
Total Offsite Hunter Dose (Deer + Soil Exposure)	7.16	100	7.16
Savannah River Swamp Fisherman			
Steel Creek Fish Consumption	0.11		
Soil Exposure ^(d)	2.08		
Total Offsite Fisherman Dose (Fish + Soil Exposure)	2.19	100	2.19

a. All-pathway dose standard; 100 mrem/yr (DOE Order 458.1)

b. In 2023, the maximum dose to a hypothetical fisherman resulted from the consumption of bass from the mouth of Lower Three Runs

c. Includes the dose from a combination of external exposure to and incidental ingestion and inhalation of the worstcase Savannah River swamp soil

d. Includes the dose from a combination of external exposure and incidental ingestion and inhalation of Savannah River swamp soil near the mouth of Steel Creek

2.4.3.4 Risk Comparison

For 2023, SRS compared the maximum potential radiation doses and lifetime fatal and nonfatal cancer risks (from the consumption of SRS creek-mouth fish for 1-year, 30-year, and 50-year exposure durations) to the radiation risks associated with the DOE Order 458.1 all-pathway dose standard of 100 mrem/yr (1.0 mSv/yr) in Table 2-5. SRS estimated the potential risks using the cancer morbidity risk coefficients from Federal Guidance Report No. 13 (EPA 1999). The assumed maximum fish consumption rate is 24 kg per year (Table 1-1).

In 2023, the maximum dose and risk to a hypothetical fisherman resulted from the consumption of bass from the mouth of Lower Three Runs (Data Table A-30b and Data Table A-30c). Figure 2-5 shows the history (1994-2023) of the annual potential radiation doses from consumption of Savannah River fish. Over the past ten years, there are no apparent trends in these data. This is because of the relatively large variability in the radionuclide concentrations measured in fish from the same location, due to differences in the following:

- Size of the fish collected each year,
- Mobility and location within the stream mouth from which they are collected,
- Time of year they are collected,
- Amount of radionuclides in the stream water and sediments in which they live that are chemically and physically available to the fish,
- Water quality at each SRS stream mouth, caused by annual changes in stream flow rates (turbulence) and water chemistry.

Table 2-5. Potential Lifetime Risks from the Consumption of Savannah River Fish Compared toDose Standards

	Committed Dose (mrem)	Potential Risk ^(a)
2023 Savannah River Fish		
1-Year Exposure	0.11	1.3E-07
30-Year Exposure	5.17	3.9E-06
50-Year Exposure	8.61	6.5E-06
Dose Standard		
100 mrem/yr All Pathway		
1-Year Exposure	100	7.3E-05
30-Year Exposure	3,000	2.2E-03
50-Year Exposure	5,000	3.7E-03
a. All radiological risk factors are based	d on observed and documented health effects to	actual people who have received

a. All radiological risk factors are based on observed and documented health effects to actual people who have received high doses (more than 10,000 mrem) of radiation, such as the Japanese atomic bomb survivors. Radiological risks at low doses (less than 10,000 mrem) are theoretical and are estimated by extrapolating the observed health effects at high doses to the low-dose region by using a linear, no-threshold model. However, cancer and other health effects have not been observed consistently at low radiation doses because the health risks either do not exist or are so low that they are undetectable by current scientific methods.

As indicated in Table 2-5, the 50-year maximum potential lifetime risk from consumption of SRS creekmouth fish was 6.5E-06, well below the 50-year risk (3.7E-03) associated with the 100 mrem/yr dose standard.

If a potential lifetime risk is less than 1.0E-06 (i.e., one additional case of cancer over that expected in a group of 1,000,000 people), the risk is considered minimal and the corresponding contaminant concentrations are considered negligible. If a calculated risk is more than 1.0E-04 (one additional case of cancer in a population of 10,000), some form of corrective action or remediation may be required. However, if a calculated risk falls between 1.0E-04 and 1.0E-06 (the case with the maximum potential lifetime risks from the consumption of Savannah River fish), then the risk may be deemed acceptable, if it is kept 'as low as reasonably achievable' (ALARA). At SRS, an environmental ALARA program (3Q 18.5) is in place, to ensure that the potential doses and risks from Site radioactive liquid effluents (and, therefore, from consumption of Savannah River fish) are kept ALARA (SRS 2015).

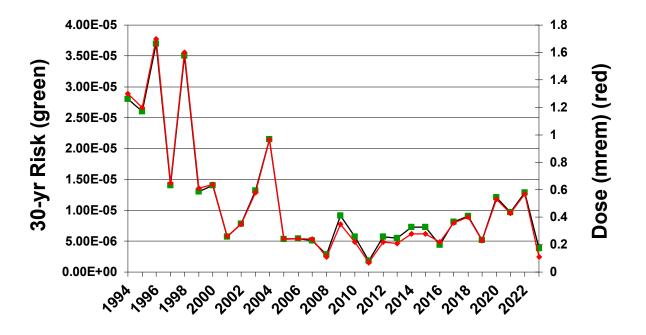


Figure 2-5. History of SRS Maximum Potential Fisherman Doses and 30-y Projected Risks

3.0 Release of Material Containing Residual Radioactivity

DOE Order 458.1 establishes authorized surface contamination limits, which, in turn, allow SRS to release personal and real property unconditionally. This order defines personal property as, "property of any kind, except for real property" and defines real property as "land and anything permanently affixed to the land such as buildings, fences and those things attached to the buildings, such as light fixtures, plumbing and heating fixtures, or other such items, that would be personal property if not attached." SRS handles unconditional release of real property in 2022, so the following discussion is associated with release of personal property from SRS. DOE Order 458.1 specifies that SRS must prepare and submit an annual summary of cleared property to the Field Element Manager (i.e., DOE-SR Manager).

3.1 Property Release Methodology

Through the use of procedures, SRS governs the unconditional release of equipment and material. Following a radiological survey, SRS can unconditionally release an item if it meets specific documented limits. For items meeting unconditional release criteria, SRS generates a form and electronically attaches it to the applicable radiological survey, via the Site's Visual Survey Data System. To determine the amount of material and equipment released from SRS facilities in 2023, SRS subsequently compiled these electronic forms and coordinated a site-wide review. These measures ensure that radiological releases of material from SRS are consistent with the requirements of DOE Order 458.1.

In 2023, SRS unconditionally released a total of 13,324 items of personal property from radiological areas. Most of these items did not leave the Site. Therefore, all of these items required no additional radiological controls, post-survey, as they met DOE Order 458.1 release criteria. The DOE Order 458.1 allows using DOE Order 5400.5 derived supplemental limits for unconditional release of equipment and materials.

In 2003, DOE approved an SRS request to use supplemental limits for releasing material from the Site, with no further DOE controls. These supplemental release limits, provided in Data Table A-31, are dose-based. These limits are such, that if any member of the public received any exposure, it would be less than 1 mrem/yr. The supplemental limits include both surface and volume concentration criteria. The surface

criteria are very similar to those used in previous years. The volume criteria allow SRS the option to dispose of potentially volume-contaminated material in Three Rivers Landfill, an onsite sanitary waste facility. In 2023, SRS did not release any material from the Site using the supplemental release limits volume concentration criteria.

4.0 Radiation Dose to Aquatic and Terrestrial Biota

DOE Order 458.1 requires that SRS conduct Site operations in a manner that protects the local biota from adverse effects due to radiation and radioactive material releases. To demonstrate compliance with this requirement, SRS uses the approved DOE Standard, DOE-STD-1153-2019, *A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota* (DOE 2019).

The biota dose rate limits specified in this standard are:

Aquatic animals	1.0 rad/day (0.01 gray/day),
Riparian animals	0.1 rad/day (0.001 gray/day),
Terrestrial plants	1.0 rad/day (0.01 gray/day), and
Terrestrial animals	0.1 rad/day (0.001 gray/day).

4.1 DOE Biota Concentration Guides

SRS evaluates biota doses for aquatic and terrestrial systems using the RESRAD Biota model (version 1.8) (DOE 2004), which directly implements the DOE (2019) guidance.

For aquatic systems (aquatic and riparian animals), the RESRAD Biota model performs a combined waterplus-sediment evaluation. SRS performed initial screenings in 2023 using maximum (for Level 1) radionuclide concentration data from the 14 SRS environmental monitoring stream and sediment sampling locations that are co-located. These screenings determine the biota concentration guide (BCG) sum-of-thefractions for each of the 14 assessed aquatic systems. A sum-of-the-fractions less than 1.0 indicates the sampling site has passed its initial pathway screening. This means that the biota dose rate limits were not exceeded, and that no further assessments are needed.

Data Table A-32 presents the results of the 2023 biota dose assessment. For 2023, all SRS aquatic system locations passed the initial (Level 1) pathway screenings, and no further assessments were required.

To evaluate the terrestrial systems (terrestrial plants and animals), SRS performed initial screenings using concentration data from the five onsite radiological soil sampling locations. Typically, SRS collects and analyzes only one soil sample per year from each location. For 2023, all terrestrial locations passed their initial (Level 1) pathway screenings (Data Table A-32).

5.0 References

- Bell, E.S. 2020. Creation of CAP88 and MAXDOSE Meteorological Datasets (2014-2018) for Regulatory Dose Assessment. SRNL-STI-2020-00259, Revision 0. July 2020. Savannah River National Laboratory, Aiken, SC.
- Carlton, W.H., C.E. Murphy, Jr., and A.G. Evans. "Radiocesium in the Savannah River Site Environment," Health Physics, Volume 67, Number 3, Williams & Wilkins, Baltimore, MD; 1994.
- Eckerman, K.F. and R.W. Leggett. "User Guide to DCFPAK 3.0," Oak Ridge National Laboratory, Oak Ridge, TN; 2013.
- International Commission on Radiological Protection. "Age dependent dosses to members of the public from intake of radionuclides: part 5 compilation of ingestion and inhalation dose coefficients," Oxford: ICRP; Publication 72, Ann. 26(1); 1996.
- International Commission on Radiological Protection. "Basic anatomical and physiological data for use in radiological protection reference values," Oxford: ICRP; Publication 89, Ann. ICRP 32 (3-4); 2002.

- International Commission on Radiological Protection. "Assessing dose of the representative person for the purpose of radiation protection of the public," Oxford: ICRP; Publication 101, Ann. ICRP 36 (No. 3); 2006.
- Laird, M. G., and G. T. Jannik. "Updated External Exposure Dose Coefficients," SRNL-L3200-2020-00014, Savannah River National Laboratory, Savannah River Site, Aiken, SC; 2020.
- Minter, K. M., G. T. Jannik, B. H. Stagich, K. L. Dixon, and J. R. Newton. 'Comparison of the Current Center of Site Annual NESHAP Dose Modeling at the Savannah River Site with Other Assessment Methods," Health Physics, v144(4), April 2018.
- National Council on Radiation Protection and Measurements (NCRP). "Ionizing Radiation Exposure of the Population of the United States," NCRP Report No. 160, Bethesda, MD, 2009.
- Peyton, M. and B.H Stagich. "Verification of LADTAP XL© 2022," SRNL-L3220-2022-00002, Savannah River National Laboratory, Savannah River Site, Aiken, SC; 2022.
- Savannah River National Laboratory. "Environmental Dose Assessment Manual," SRNL-TR-2010-00274, Revision 2, Savannah River National Laboratory, Aiken, SC; 2017.
- Savannah River Site, "Savannah River Site Environmental Monitoring Program Management Plan," SRS Manual 3Q1-101, Revision 7, Savannah River Site, Aiken, SC; 2015.
- South Carolina Department of Health and Environmental Control. "Environmental Surveillance and Oversight Program, 2012 Data Report," CR-004111, 2013, Columbia, SC; 2013.
- Stagich, B.H. "CAP88-PC Version 4.1 Verification (U)," SRNL-L3200-2020-00028, Savannah River National Laboratory, Savannah River Site, Aiken, SC; 2020.
- Stagich, B. H. "Land and Water Use Characteristics and Human Health Input Parameters for Use in Environmental Dosimetry and Risk Assessments at the Savannah River Site - 2021 Update," SRNL-STI-2016-00456, Revision 2, Savannah River National Laboratory, Savannah River Site, Aiken, SC; 2021.
- Stone, D. K., Jannik, G. T. "Site Specific Reference Person Parameters and Derived Concentration Standards for the Savannah River Site," SRNL-STI-2013-00115, Savannah River National Laboratory. Aiken, SC: 2013.
- U.S. Department of Energy. "External and Internal Dose Conversion Factors for Calculation of Dose to the Public", DOE/EH-0070 & 71, Washington, D.C., 1988
- U.S. Department of Energy. "RESRAD-BIOTA: A Tool for Implementing a Graded Approach to Biota Dose Evaluation," DOE/EH-0676, January 2004, Washington, DC; 2004.
- U.S. Department of Energy. "DOE Derived Concentration Technical Standard," DOE-STD-1196-2022, Washington, DC; 2022.
- U.S. Department of Energy. "A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota," DOE Standard, DOE-STD-1153-2019, Washington, DC; 2019.
- U.S. Department of Energy. "Radiation protection of the public and the environment, Change #4," Washington, DC: U.S. DOE Order 458.1; 2020.
- U.S. Environmental Protection Agency. "External Exposure to Radionuclides in Air, Water, and Soil," Federal Guidance Report No. 12, USEPA 402-R-93-081, Washington, DC; 1993.
- U.S. Environmental Protection Agency. "Cancer Risk Coefficients for Environmental Exposure to Radionuclides," Federal Guidance Report No.13, USEPA 402-R-99-001, September 1999, Washington, DC; 1999.

- U.S. Environmental Protection Agency. "National Primary Drinking Water Regulations," Title 40 Code of Federal Regulations, Part 141, December 2000, Washington, DC; 2000.
- U.S. Environmental Protection Agency (EPA). "National Emissions Standards for Hazardous Air Pollutants; Radionuclides," Title 40 Code of the Federal Regulations, Part 61, Washington, D.C. 2006.
- U.S. Environmental Protection Agency. "Exposure factors handbook 2011 edition (final report)," Washington, DC: U.S. Environmental Protection Agency; EPA/600/R-09/052F; 2011.
- U.S. Environmental Protection Agency. "Update for Chapter 11 of the Exposure Factors Handbook Intake of Meats, Dairy Products, and Fats," Washington, DC: U.S. Environmental Protection Agency; EPA/600/R-17/485F; 2018.
- U.S. Environmental Protection Agency. "Update for Chapter 12 of the Exposure Factors Handbook Intake of Grain Products," Washington, DC: U.S. Environmental Protection Agency; EPA/600/R-18/095F; 2018.
- U.S. Environmental Protection Agency. "Update for Chapter 9 of the Exposure Factors Handbook Intake of Fruits and Vegetables," Washington, DC: U.S. Environmental Protection Agency; EPA/600/R-18/098F; 2018.
- U.S. Environmental Protection Agency. "Update for Chapter 3 of the Exposure Factors Handbook Ingestion of Water and Other Select Liquids," Washington, DC: U.S. Environmental Protection Agency; EPA/600/R-18/259F; 2019.
- U.S. Environmental Protection Agency. "External Exposure to Radionuclides in Air, Water, and Soil," Federal Guidance Report No. 15, USEPA 402-R-19-002, Washington, DC; 2019.
- U.S. Nuclear Regulatory Commission. "Regulatory Guide 1.109 Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purpose of Evaluating Compliance with 10 CFR 50, Appendix I," Revision 1, Washington, DC; 1977.
- Yu, C., A.J. Zielen, J.J. Cheng, D.J. LePoire, E. Gnanapragasam, S. Kamboj, Amish, A. Wallo III, W.A. Williams, and H. Peterson, "User's Manual for RESRAD," Version 6, Environmental Assessment Division, Argonne National Laboratory, July 2001, Argonne, IL; 2001.

Appendix A

Data Table A-1. Parameters Used for Liquid Pathway Calculations

Table A-1, Parameters Used for Liquid Pathway Dose Calculations

Page 1 of 2

Reference and Typical Person Consumption and Usage Rates

(Note: Values developed by Savannah River National Laboratory for SRS in Stone and Jannik, 2013)

Pathway	Reference Person 95th percentile	Typical Person 50th percentile	Units	
Fish consumption	24	3.7	kg/y	
Marine invertebrates	Not applicable	1.5	kg/y	
Boating	44	3,110,000	h/y (person-h/y)	
Swimming	14	295,000	h/y (person-h/y)	
Shoreline recreation	20	822,000	h/y (person-h/y)	
Water consumption	920	330	L/y	
Population Served by Downriver Water	Freatment Plants			
Beaufort-Jasper Purrysburg Plant		86,700	persons	
Beaufort-Jasper Chelsea Plant		108,000	persons	
City of Savannah Industrial & Domestic Wa	ater Supply	70,000	persons	
50 mile Donulation				
50-mile Population H-Area - 2020 US Census		838,833	persons	
	Dose Calculations	838,833 Value	persons Units	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid		Value		
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14		·	Units	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary		Value 7,939	Units	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time		Value 7,939	Units	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation		Value 7,939 3	Units ft ³ /s	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time		Value 7,939 3 1	Units ft ³ /s d	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish		Value 7,939 3 1 1.5	tunits ft ³ /s d d	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish Treatment Plant Drinking Water		Value 7,939 3 1 1.5 2	Units ft ³ /s d d d	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish		Value 7,939 3 1 1.5 2 4	Units ft ³ /s d d d d	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish Treatment Plant Drinking Water Sport Fish		Value 7,939 3 1 1.5 2 4 10	Units ft ³ /s d d d d d d	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish Treatment Plant Drinking Water Sport Fish Commercial Fish Salt Water Invertebrate		Value 7,939 3 1 1.5 2 4 10 13	Units ft ³ /s d d d d d d d d	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish Treatment Plant Drinking Water Sport Fish Commercial Fish Salt Water Invertebrate Edible aquatic food harvest		Value 7,939 3 1 1.5 2 4 10 13 13	Units ft ³ /s d d d d d d d d d d	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish Treatment Plant Drinking Water Sport Fish Commercial Fish Salt Water Invertebrate		Value 7,939 3 1 1.5 2 4 10 13 13 8,220	Units ft ³ /s d d d d d d d d d g erson-kg/y	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish Treatment Plant Drinking Water Sport Fish Commercial Fish Salt Water Invertebrate Edible aquatic food harvest Fish - sport		Value 7,939 3 1 1.5 2 4 10 13 13 13 8,220 57,000	Units ft ³ /s d d d d d d d d d d g erson-kg/y person-kg/y	
H-Area - 2020 US Census Site-Specific Parameters Used in Liquid Savannah River <i>effective</i> flow rate at RM 14 River dilution in estuary Transport Time Recreation Drinking Water Fish Treatment Plant Drinking Water Sport Fish Commercial Fish Salt Water Invertebrate Edible aquatic food harvest Fish - sport Fish - commercial		Value 7,939 3 1 1.5 2 4 10 13 13 8,220	Units ft ³ /s d d d d d d d d d g erson-kg/y	

a) The effective river flow rate was based on tritium concentration measurements.

The 2023 measured river flow rate was 9,895 cfs. See Data Table 6-6 for details.

Parameters Used for Liquid Pathway Dose Calculations

Page 2 of 2

Irrigation Parameter Values:

Parameter	Value	Units	Comments
50Mile Total Vegetable Production:	7122412	kg/yr	5.30E+06*
50Mile Total Leafy Veg Production:	1780603	kg/yr	1.40E+06*
Irrigated land area:	1000	acres	
Pop dose determined by:	area		POP or AREA
River transit time:	2	d	
Irrigation rate:	3.6	L/sq.m/d	102 L/sq.m/mo
Weathering removal constant:	0.0495	1/d	14 d half-life
Crop exposure time:	70	d	
Grass exposure time:	30	d	
Vegetable crop yield:	2.2	kg/sq.m	
Pasture grass yield:	0.7	kg/sq.m	
Milk production yield:	0.34	L/sq.m	
Meat production yield:	0.01	kd/sq.m	
Surface density of soil:	240	kg/sq.m	
Pasture grass hold-up time:	0	d	
Veg transport time (individual):	1	d	d
Veg transport time (population):	6	d	d
Milk transport time:	3	d	d
Meat transport time:	6	d	d
Fraction of fodder from irrigated field:	1.00		
Cattle consumption rate of fodder:	36	kg/d	beef
	52	kg/d	milk
Fraction of water from Savannah River:	1.00		
Cattle consumption rate of water:	28	L/d	beef
	50	L/d	milk
Individual consumption rates:	305	kg/yr	veg
	25	kg/yr	leafy
	90	kg/yr	meat
	270	L/yr	milk
Population consumption rates:	95	kg/yr	veg
	9	kg/yr	leafy
	35	kg/yr	meat
	73	L/yr	milk
Fractional retention on leaves:	0.25		all nuclides

	Reference Person 95th	SRS MEI	Percent	Typical Person 50th	SRS Population	Percent	
Pathway	Percentile (Individual)	Pre-2012 Adult Individual	Change	Percentile (Population)	Pre-2012 Average Adult	Change	
Fruits, vegetables, and grains (kg/yr)	305	276	↑ 10.5%	95	163	↓ 41.7%	
Leafy vegetables (kg/yr)	25	43	↓ 41.9%	9	21	↓ 57.1%	
Milk (L/yr)	270	230	↑ 17.4%	73	120	↓ 39.2%	
Meat (beef) (kg/yr)	90	81	↑ 11.1%	35	43	↓ 18.6%	
Inhalation (m ³ /yr)	6,400	8,000	↓ 20.0%	5,000	5,548	↓ 9.9%	

Data Table A-2. Site-Specific Parameters Used for Airborne Pathway Dose Data Table A-2, Site-Specific Parameters Used for Airborne Pathway Doses using MAXDOSE and POPDOSE

50-mile Population

H-Area - 2020 US Census (persons) 838,833

Release Locations for Representative Person Dose

Reactors	F & H	SRNL	Diffuse and Fugitive
40	61	31	0
inates)			
40740	63380	51860	58000
54130	71900	106670	62000
269	308	368	338
	40 inates) 40740 54130	40 61 inates) 40740 54130 71900	40 61 31 inates) 40740 63380 51860 54130 71900 106670

Data Table A-3. Meteorological Data (2014 – 2018) Data Table A-3, Meteorological Data (2014-2018)

1 of 7

Direction is from which the wind blows

43698 WIND STATS H_AREA 60MIN 62M 14-18 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class A

Atmospheric Stability Class A

	Extreme	ly Unstable	e Conditions						
UMAX(M/S)	Ν	NNE	NE	ENE	Е	ESE	SE	SSE	
2.00	0.254	0.325	0.268	0.297	0.293	0.330	0.318	0.247	
4.00	0.222	0.316	0.343	0.423	0.471	0.416	0.318	0.240	
6.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
TOTAL	0.480	0.640	0.610	0.720	0.760	0.750	0.640	0.490	

Joint Frequency Distribution of Wind Speed and Direction:

Extremely Unstable Conditions UMAX(M/S) S SSW SW WSW W WNW TOTAL NW NNW 0.286 0.364 0.359 0.414 0.384 0.366 0.352 0.263 5.120 2.00 4.00 0.346 0.421 0.533 0.725 0.611 0.446 0.238 0.213 6.282 0.0000.0000.000 0.000 0.000 0.0000.0000.000 0.000 6.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 8.00 0.0000.0000.0000.0000.000 0.0000.0000.000 0.00012.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.0000.000 14.10 0.630 0.790 0.890 1.140 1.000 0.810 0.590 0.480 11.420 TOTAL

Atmospheric Stability Class B

Atmospheric Stability Class B

Data Table A-3. Meteorological Data (2014-2018) (continued)

2 of 7

Direction is from which the wind blows

43698 WIND STATS H_AREA 60MIN 62M 14-18 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Moderately Unstable Conditions									
UMAX(M/S)	Ν	NNE	NE	ENE	Е	ESE	SE	SSE	
2.00	0.009	0.027	0.039	0.032	0.023	0.021	0.018	0.023	
4.00	0.098	0.181	0.293	0.437	0.339	0.256	0.144	0.101	
6.00	0.018	0.032	0.094	0.112	0.059	0.039	0.021	0.014	
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
TOTAL	0.130	0.240	0.430	0.580	0.420	0.320	0.180	0.140	

Joint Frequency Distribution of Wind Speed and Direction:

Moderately Unstable Conditions UMAX(M/S) SSW WSW W WNW NNW TOTAL S SW NW 2.00 0.018 0.027 0.014 0.039 0.032 0.018 0.011 0.018 0.369 4.00 0.181 0.245 0.412 0.467 0.325 0.137 0.114 4.346 0.616 6.00 0.032 0.039 0.046 0.098 0.016 0.011 0.928 0.119 0.178 8.00 0.000 0.0000.000 0.000 0.0000.000 0.000 0.000 0.00012.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 14.10 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 TOTAL 0.230 0.310 0.470 0.770 0.680 0.440 0.160 0.140 5.640

Atmospheric Stability Class C

Atmospheric Stability Class C

Data Table A-3. Meteorological Data (2014-2018) (continued)

3 of 7

Direction is from which the wind blows

43698 WIND STATS H_AREA 60MIN 62M 14-18 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Slightly Unstable Conditions									
UMAX(M/S)	Ν	NNE	NE	ENE	Е	ESE	SE	SSE	
2.00	0.030	0.048	0.053	0.046	0.041	0.030	0.021	0.032	
4.00	0.146	0.302	0.554	0.513	0.277	0.215	0.172	0.160	
6.00	0.126	0.277	0.764	0.348	0.185	0.160	0.114	0.153	
8.00	0.014	0.039	0.098	0.023	0.009	0.007	0.009	0.018	
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
TOTAL	0.320	0.670	1.470	0.930	0.510	0.410	0.320	0.360	

Joint Frequency Distribution of Wind Speed and Direction:

Slightly Unstable Conditions UMAX(M/S) SSW WSW W WNW NW NNW TOTAL S SW 2.00 0.043 0.043 0.025 0.041 0.046 0.030 0.037 0.023 0.589 4.00 0.323 0.371 0.371 0.691 0.487 0.375 0.162 0.178 5.297 6.00 0.320 0.330 0.503 0.586 0.220 0.092 0.851 0.870 5.899 8.00 0.034 0.034 0.062 0.153 0.174 0.142 0.030 0.016 0.862 12.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 14.10 0.000 0.000 0.000 0.000 0.000 0.000 0.0000.000 0.000 TOTAL 0.720 0.7800.960 1.740 1.580 1.130 0.450 0.310 12.660

Atmospheric Stability Class D

Atmospheric Stability Class D

Data Table A-3. Meteorological Data (2014-2018) (continued)

4 of 7

Direction is from which the wind blows

43698 WIND STATS H_AREA 60MIN 62M 14-18 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Neutral Conditions UMAX(M/S) Ν NNE NE ENE Е ESE SE SSE 2.00 0.162 0.211 0.275 0.300 0.259 0.238 0.174 0.158 4.00 0.595 0.957 1.741 2.110 1.611 0.947 0.995 0.888 6.00 0.350 0.815 1.659 0.689 0.382 0.403 0.787 1.215 8.00 0.071 0.195 0.378 0.037 0.021 0.032 0.092 0.146 12.00 0.005 0.009 0.005 0.032 0.062 0.014 0.000 0.007 14.10 0.011 0.007 0.007 0.0000.0000.0000.002 0.002 TOTAL 1.190 2.220 3.150 2.270 1.630 2.060 2.410 4.120

Joint Frequency Distribution of Wind Speed and Direction:

Neutral Conditions UMAX(M/S) SW WSW W NNW TOTAL S SSW WNW NW 2.00 0.204 0.162 0.156 0.153 0.153 0.158 0.151 0.112 3.026 4.00 0.963 0.870 0.403 17.614 1.451 1.114 1.149 1.211 0.609 6.00 1.094 1.625 1.249 1.421 1.231 1.213 0.423 0.245 14.801 8.00 0.224 0.204 0.133 0.279 0.460 0.478 0.162 0.105 3.017 12.00 0.787 0.021 0.018 0.039 0.071 0.156 0.268 0.030 0.050 14.10 0.002 0.002 0.035 0.002 0.000 0.000 0.000 0.000 0.000 TOTAL 3.530 2.590 2.730 3.140 2.960 2.990 1.380 0.920 39.290

Atmospheric Stability Class E

Atmospheric Stability Class E

Data Table A-3. Meteorological Data (2014-2018) (continued)

5 of 7

Direction is from which the wind blows

43698 WIND STATS H_AREA 60MIN 62M 14-18 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

	Slightly S	table Condi	tions						
UMAX(M/S)	Ν	NNE	NE	ENE	Е	ESE	SE	SSE	
2.00	0.103	0.101	0.130	0.158	0.126	0.126	0.133	0.092	
4.00	0.279	0.336	0.645	1.009	0.808	0.792	0.677	0.732	
6.00	0.142	0.240	0.577	0.247	0.222	0.398	0.339	0.517	
8.00	0.002	0.005	0.009	0.000	0.000	0.000	0.000	0.005	
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
TOTAL	0.530	0.680	1.360	1.410	1.160	1.320	1.150	1.350	

Joint Frequency Distribution of Wind Speed and Direction:

Slightly Stable Conditions UMAX(M/S) SSW WSW W WNW NNW TOTAL S SW NW 2.00 0.112 0.114 0.108 0.105 0.092 0.094 0.080 0.103 1.777 4.00 1.082 1.064 0.735 0.819 0.721 0.565 0.332 11.079 0.483 6.00 0.998 1.204 1.158 0.890 0.682 0.449 0.229 0.121 8.413 8.00 0.0070.016 0.027 0.005 0.007 0.0000.0000.000 0.083 12.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 14.10 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.0000.000 TOTAL 2.360 2.190 1.7602.130 1.500 1.110 0.790 0.560 21.360

Data Table A-3. Meteorological Data (2014-2018) (continued)

6 of 7

Direction is from which the wind blows

43698 WIND STATS H_AREA 60MIN 62M 14-18 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

	Moderate	ly Stable C	onditions						
UMAX(M/S)	Ν	NNE	NE	ENE	Е	ESE	SE	SSE	
2.00	0.057	0.057	0.046	0.018	0.025	0.048	0.062	0.085	
4.00	0.382	0.467	0.382	0.110	0.121	0.158	0.243	0.545	
6.00	0.167	0.281	0.254	0.039	0.021	0.087	0.114	0.222	
8.00	0.000	0.002	0.000	0.000	0.000	0.000	0.000	0.000	
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
TOTAL	0.610	0.810	0.680	0.170	0.170	0.290	0.420	0.850	

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class F

Atmospheric Stability Class F

	Moderate	ly Stable C	onditions						
UMAX(M/S)	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
2.00	0.073	0.064	0.071	0.082	0.066	0.076	0.082	0.050	0.962
4.00	0.474	0.675	0.517	0.350	0.293	0.405	0.405	0.407	5.934
6.00	0.238	0.396	0.263	0.144	0.153	0.169	0.082	0.140	2.770
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.002
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.790	1.140	0.850	0.580	0.510	0.650	0.570	0.600	9.690

Atmospheric Stability Class G

Atmospheric Stability Class G

Data Table A-3. Meteorological Data (2014-2018) (continued)

7 of 7

Direction is from which the wind blows

43698 WIND STATS H_AREA 60MIN 62M 14-18 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Extremely Stable Conditions UMAX(M/S) Ν NNE NE ENE Е ESE SE SSE 2.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 4.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 6.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 8.00 0.0000.0000.0000.000 0.000 0.0000.0000.00012.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 14.10 0.0000.0000.0000.000 0.000 0.0000.0000.000TOTAL 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000

Joint Frequency Distribution of Wind Speed and Direction:

Extremely Stable Conditions UMAX(M/S) WSW NNW S SSW SW W WNW NW TOTAL 2.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 4.00 0.000 0.000 0.0000.000 0.000 0.000 0.0000.0000.0006.00 0.0000.0000.000 0.000 0.000 0.0000.000 0.000 0.000 8.00 0.0000.0000.000 0.000 0.000 0.000 0.000 0.000 0.000 12.00 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 14.10 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 TOTAL 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000 0.000

Dir(Miles)	5-10	10-20	20-30	30-40	40-50	TOTAL
N	546	12403	9733	5797	12786	41265
NNE	151	3383	3312	6729	48073	61648
NE	140	2840	2729	6767	24032	36508
ENE	10	3357	3141	5869	43438	55815
Ε	45	4819	6515	6380	4604	22363
ESE	4	5151	1716	1723	2594	11188
SE	0	587	3988	4846	9156	18577
SSE	0	146	266	256	5126	5794
S	0	318	736	7275	3696	12025
SSW	0	631	2279	6118	2821	11849
SW	24	1621	2966	794	1894	7299
WSW	6	1307	9647	1362	5504	17826
W	64	3777	20199	4759	8447	37246
WNW	1748	2982	149477	129143	15701	299051
NW	581	12022	78558	26646	2130	119937
NNW	2652	38198	25675	11266	2651	80442
Total	5971	93542	320937	225730	192653	838833

Data Table A-4. Population Distribution Around SRS's H-Area (2020 Census) Data Table A-4, Population Distribution Around SRS's H-Area (2020 Census)

For a 50-mile (80-km) radius around SRS's H-Area

Year 1954	Mean Annual Flow (cfs) 7,382	Year 2000	Mean Annual Flow (cfs) 5,550
1955	5,974	2001	5,804
1956	6,309	2002	5,386
1957	8,312	2003	12,842
1958	11,038	2004	8,778
1959	9,748	2005	11,935
1960	13,112	2006	6,818
1961	10,909	2007	6,088
1962	10,580	2008	4,833
1963	11,138	2009	7,666
1964	20,497	2010	9,893
1965	12,785	2011	5,714
1966	11,175	2012	4,570
1967	10,573	2012	8,479
1968	9,624	2013	9,440
1969	10,945	2015	8,833
1970	7,169	2015	10,150
1971	10,715	2010	5,698
1972	11,275	2017	9,787
1972	14,536	2010	10,968
1973	11,138	2019	15,345
1974	15,533	2020	10,508
1975	14,008	2021	8,751
1970	11,695	2022	9,840
1977	10,547	Mean =	
1978 1979		Harmonic Mean =	10,011 8992
1979	13,333 13,282	Geometric Mean =	8992 9506
		Geometric Mean –	9500
1981 1982	6,544 7,169	10	9,932
		10-year mean	-
1983	12,348	15-year mean	9,043
1984	12,759		
1985	7,167		
1986 1987	6,175		
	8,955		
1988	5,364		
1989	7,966		
1990	11,858		
1991	11,598		
1992	11,697		
1993	14,788		
1994	12,271		
1995	12,750	(USGS #02197500)	
1996	11,467	Near River Mile 118.	8 (Hwy 301 Bridge)
1997	10,464		
1998	16,239	USGS #021973269	
1999	6,160	RM 160 Near Wayne	boro, GA

Data Table A-5. Savannah River Mile 118.8 Flow Rates, 1954 – 2023 Data Table A-5, Savannah River Mile 118.8 Flow Rates, 1954-2023

Data Table A-6. Calculated Effective Flow Rate Data Table A-6, Calculated Effective River Flow Rates

Savannah River Monthly Flow Rate Based on USGS Daily Flow Rate Average is Monthly Average

	Flow, cfs
Month	River Mile 118.8 (Hwy 301)
January	13,917
February	18,811
March	8,326
April	14,069
May	10,200
June	9,863
July	9,466
August	8,988
September	7,889
October	5,927
November	5,348
December	5,937
Average	9,895

Savannah River Annual Flow Rate Annual Average Based on USGS Daily Flow Rate

Year	River Mile 118.8
	cfs
2014	9,440
2015	8,833
2016	10,150
2017	5,698
2018	9,787
2019	10,968
2020	15,345
2021	10,508
2022	8,751
2023	9,840
10-y Average	9,932

NOTE:

The annual measured river flow rate shown in the tables above is not used in the dose calculations unless the calculated "effective" river flow rate is higher.

River Flow Rate Adjustment Based on Tritium Measurements

Total Tritium Released to the Savannah River:	2,779	Curies	
---	-------	--------	--

(For 2023, this release total is from the River Transport measurements, which were the highest) (2023 Reported: 314 Ci from SRS, 16.3 Ci from the Barnwell Low-Level Disposal Facility, and 2183 Ci from Plant Vogtle)

Location	Finished Water Meas. Conc. pCi/ml	Calculated Total Flow ml	Effective Flow Rate cfs
River Mile 141.5 - calc ^(a,b)	0.392	7.09E+15	7,939
Beaufort-Jasper/Purrysburg - calc (a,b)	0.375	7.41E+15	8,299
Beaufort-Jasper/Chelsea - calc ^(a,b)	N/A	N/A	8,299
Savannah I&D - calc ^(a,b)	N/A	N/A	8,299
Estuary (1.1 x River Mile 118.8 Effective Fl	ow Rate) ^c		8,733

Estuary (1.1 x River Mile 118.8 Effective Flow Rate)^c a) Total flow calculated on basis of releases of tritium and measured tritium concentrations in the

river using the following equation: Total flow, ml=(Q,Ci)(1.0E+12 pCi/Ci)/(Conc,pCi/ml).

b) Effective Flow rate, in cfs, is calculated using the following equation:

Flow Rate, $cfs = (Total Flow, ml/yr)/(8.93E+11 ml-sec/ft^3-yr)$

c) Estuary effective flow rate is used for the collective dose calculation

Data Table A-7. Radioactive Liquid Releases by Source (Curies)

Data Table 6-7, Radioactive Liquid Releases by Site Stream - (Curies)

	Upper Three Runs	Fourmile Branch	Steel Creek + Pen Branch	Lower Three Runs	
Nuclide	(A,M,F,H)	(F,G,H,Tritium)	(K,L)	(P,R)	Totals
H-3 ^a	2.61E+01	2.43E+02	1.09E+02	0.00E+00	3.78E+02 ^a
C-14	6.29E-04	3.48E-03	0.00E+00	0.00E+00	4.11E-03
Co-60	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Sr-90	0.00E+00	1.90E-02	0.00E+00	0.00E+00	1.90E-02
Tc-99	0.00E+00	1.24E-02	0.00E+00	0.00E+00	1.24E-02
I-129	0.00E+00	1.45E-02	0.00E+00	0.00E+00	1.45E-02
Cs-137 ^b	1.05E-04	8.73E-03	0.00E+00	0.00E+00	1.67E-01 ^b
U-234	5.30E-02	3.11E-03	1.37E-03	5.75E-04	5.80E-02
U-235	3.31E-03	2.55E-04	1.62E-04	3.13E-04	4.04E-03
U-238	6.42E-02	4.08E-03	9.35E-04	4.77E-04	6.97E-02
Np-237	7.24E-08	3.59E-05	0.00E+00	0.00E+00	3.60E-05
Pu-238	6.92E-06	2.45E-04	0.00E+00	0.00E+00	2.52E-04
Pu-239	1.65E-06	8.80E-05	0.00E+00	0.00E+00	8.96E-05
Am-241	1.30E-08	2.35E-04	0.00E+00	0.00E+00	2.35E-04
Cm-244	2.32E-08	1.47E-04	0.00E+00	0.00E+00	1.47E-04
Alpha ^c	2.99E-04	5.28E-03	0.00E+00	9.85E-03	1.54E-02
Beta-Gamma ^d	2.49E-03	1.16E-02	2.06E-02	2.27E-02	5.73E-02
Flow Volume (L)	1.74E+11	1.82E+10	4.67E+10	2.16E+10	

(Used as the Source Term for the 2023 Liquid Pathway Dose Calculations)

a) Depending which one is higher, the tritium release total includes direct + migration releases or tritium transport in streams totals.

The higher one is used in the dose calculations for determining SRS-only impacts.

It does not include releases to the Savannah River from the Vogtle Electric Generating Plant or migration releases into

Lower Three Runs from the Barnwell Low-Level Radioactive Waste Disposal Facility.

b) Depending on which value is higher, the Cs-137 release is based on concentrations measured in Steel Creek (mouth) fish or on the actual measured effluent + migration release total from the site. Refer to data table 6-10 for more information.

c,d) For dose calculations, unspecified alpha and beta releases are assumed to be Pu-239 and Sr-90, respectively.

						2022 to 2023
Radionuclide	2019	2020	2021	2022	2023	Percent Change
H-3	4.24E+02	5.19E+02	4.83E+02	3.48E+02	3.78E+02	9%
C-14	1.53E-02	5.32E-04	5.80E-04	7.09E-03	4.11E-03	-42%
Mn-54			9.70E-06			
Co-58			1.61E-04			
Sr-89,90	1.31E-02	1.43E-01	2.15E-02	1.63E-02	1.90E-02	17%
Tc-99	1.66E-02	3.59E-02	3.42E-02	1.22E-02	1.24E-02	2%
I-129	8.92E-03	2.87E-02	2.19E-02	1.30E-02	1.45E-02	11%
Cs-137	8.24E-03	2.49E-01	2.37E-02	9.59E-03	8.83E-03	-8%
Eu-154				4.44E-03		-100%
Ra-226	2.32E-03	2.50E-03				
U-234	1.93E-02	2.56E-02	3.28E-02	6.35E-02	5.80E-02	-9%
U-235	3.62E-04	1.03E-03	3.85E-04	3.73E-03	4.04E-03	8%
U-238	2.20E-02	2.93E-02	3.34E-02	7.20E-02	6.97E-02	-3%
Np-237	8.61E-05	1.05E-04	1.17E-04	9.07E-05	3.60E-05	-60%
Pu-238	1.21E-04	1.00E-04	3.98E-04	2.53E-04	2.52E-04	0%
Pu-239	9.38E-06	7.89E-06	2.01E-05	2.72E-05	8.96E-05	229%
Am-241	1.16E-05	1.11E-04	3.18E-05	2.60E-05	2.35E-04	803%
Cm-244	2.17E-06	1.79E-05	1.46E-04	1.02E-05	1.47E-04	1348%
Alpha	4.91E-03	7.33E-03	6.22E-03	1.04E-02	1.54E-02	49%
Beta-Gamma	4.18E-02	5.77E-02	5.27E-02	4.39E-02	5.73E-02	31%

Data Table A-8. Radioactive Liquid Releases, 2019 – 2023 (Curies) Data Table A-8, Radioactive Liquid Releases, 2019-2023 (curies)

Measured liquid releases only, no tritium transport or cesium-137 adjustment from fish

Data Table A-9. Radionuclide Concentrations at Downriver Drinking Water Plants Compared to EPA MCLs

	EPA	Below	Fraction of	BJWSA	Fraction of
	MCL	SRS ^(a)	EPA MCL	Purrysburg ^(b)	EPA MCL
Nuclide	(pCi/L)	(pCi/L)	(unitless)	(pCi/L)	(unitless)
H-3 ^(c)	2.00E+04	3.92E+02	1.96E-02	3.75E+02	1.87E-02
C-14	2.00E+03	5.79E-04	2.89E-07	5.54E-04	2.77E-07
Sr-90	8.00E+00	2.67E-03	3.34E-04	2.56E-03	3.20E-04
Тс-99	9.00E+02	1.75E-03	1.95E-06	1.68E-03	1.86E-06
I-129	1.00E+00	2.04E-03	2.04E-03	1.95E-03	1.95E-03
Cs-137	2.00E+02	2.36E-02	1.18E-04	2.26E-02	1.13E-04
U-234 ^(d)	1.03E+01	8.18E-03	7.94E-04	7.82E-03	7.60E-04
U-235 ^(d)	4.67E-01	5.70E-04	1.22E-03	5.45E-04	1.17E-03
U-238 ^(d)	1.00E+01	9.83E-03	9.82E-04	9.40E-03	9.40E-04
Np-237	1.50E+01	5.07E-06	3.38E-07	4.85E-06	3.24E-07
Pu-238	1.50E+01	3.55E-05	2.37E-06	3.40E-05	2.26E-06
Pu-239	1.50E+01	1.26E-05	8.42E-07	1.21E-05	8.05E-07
Am-241	1.50E+01	3.31E-05	2.21E-06	3.17E-05	2.11E-06
Cm-244	1.50E+01	2.08E-05	1.39E-06	1.99E-05	1.33E-06
Alpha	1.50E+01	2.18E-03	1.45E-04	2.08E-03	1.39E-04
Beta	8.00E+00	8.08E-03	1.01E-03	7.73E-03	9.66E-04
Sum of the Fra	ctions =		2.62E-02		2.51E-02

Data Table A-9, Radionuclide Concentrations at the Downriver Drinking Water Plants Compared to EPA MCLs

a. Near Savannah River Mile 141.5, below Steel Creek mouth

b. Beaufort-Jasper Water and Sewer Authority, finished drinking water at the Purrysburg Plant

 c. The tritium concentrations and source term are based on actual measurements of the Savannah River water at the various locations They include contributions from VEGP (2183 Ci in 2023) and the Barnwell Low-Level Disposal Facility (16.3 Ci in 2023) All other radionuclide concentrations are calculated based on the effective or measured river flow rate

d. MCLs for Uranium based on radioisotope specific activity X 30 µg/L X isotopic abundance

Data Table A-9 – Support. 2023 Radioactive Liquid Release Source Term and 12-Month Average Downriver Radionuclide Concentrations Compared to the US EPA's Drinking Water Maximum Contaminant Levels (MCL)

2023 Radioactive Liquid Release Source Term and 12-Month Average Downriver Radionuclide Concentrations Compared to the US EPA's Drinking Water Maximum Contaminant Levels (MCL)

	<u>12-Mo</u>	nth Average (Concentration (Output from LADTAP	<u>XL (uCi/mL)</u>	
	Curies	Below	at BJWSA Purrysburg	EPA	Below	at BJWSA Purrysburg
Nuclide	Released	SRS ^(a)	(b)	MCL ^(d)	SRS ^(a)	(b)
H-3 ^(c)	2.78E+03	3.92E+02	3.75E+02	2.00E+04	3.92E-07	3.75E-07
C-14	4.11E-03	5.79E-04	5.54E-04	2.00E+03	5.79E-13	5.54E-13
Sr-90	1.90E-02	2.67E-03	2.56E-03	8.00E+00	2.67E-12	2.56E-12
Tc-99	1.24E-02	1.75E-03	1.68E-03	9.00E+02	1.75E-12	1.68E-12
I-129	1.45E-02	2.04E-03	1.95E-03	1.00E+00	2.04E-12	1.95E-12
Cs-137	1.67E-01	2.36E-02	2.26E-02	2.00E+02	2.36E-11	2.26E-11
U-234 ^(d)	5.80E-02	8.18E-03	7.82E-03	1.03E+01	8.18E-12	7.82E-12
U-235 ^(d)	4.04E-03	5.70E-04	5.45E-04	4.67E-01	5.70E-13	5.45E-13
U-238 ^(d)	6.97E-02	9.83E-03	9.40E-03	1.00E+01	9.83E-12	9.40E-12
Np-237	3.60E-05	5.07E-06	4.85E-06	1.50E+01	5.07E-15	4.85E-15
Pu-238	2.52E-04	3.55E-05	3.40E-05	1.50E+01	3.55E-14	3.40E-14
Pu-239	8.96E-05	1.26E-05	1.21E-05	1.50E+01	1.26E-14	1.21E-14
Am-241	2.35E-04	3.31E-05	3.17E-05	1.50E+01	3.31E-14	3.17E-14
Cm-244	1.47E-04	2.08E-05	1.99E-05	1.50E+01	2.08E-14	1.99E-14
Alpha	1.54E-02	2.18E-03	2.08E-03	1.50E+01	2.18E-12	2.08E-12
Beta	5.73E-02	8.08E-03	7.73E-03	8.00E+00	8.08E-12	7.73E-12

a. Near Savannah River Mile 141.5, downriver of SRS.

b. Beaufort-Jasper Water and Sewer Authority, finished drinking water at the Purrysburg Plant

 c. The tritium concentrations and source term are based on actual measurements of the Savannah River water at the various locations They include contributions from VEGP (2183 Ci in 2023) and the Barnwell Low-Level Disposal Facility (16.3 Ci in 2023) All other radionuclide concentrations are calculated based on the effective or measured river flow rate

d. MCLs for Uranium based on radioisotope specific activity X 30 µg/L X isotopic abundance

Data Table A-10. Adjustment of Cs-137 Release Based on Fish Concentrations Data Table A-10, Adjustment of Cs-137 Release Based on Fish Concentrations

Activity in Fish River Mile 141.5 wtd	l avg conc	Cs-137 Conc,pCi/g 7.09E-02				
Cs-137 RM141.5-Max Ind	Measured Ci Released 8.83E-03	LADTAP BAF 3000	RM 118.8 Flow, cfs 7,939	Calc Fish Conc,pCi/g 3.74E-03	Meas Fish Conc,pCi/g 7.09E-02	Ratio meas/calc 18.97

Ratios (right column) are multipliers for measured releases in order for LADTAP to calculate the appropriate dose using the built in BAF factors. Calculated release values used in LADTAP calculations are shown below:

Cs-137 RM141.5-Max Ind	Multiplier (ratio) 18.97	Measured Ci Release 8.83E-03	Calc Ci Release 1.67E-01	(see note below)
Cs-137 direct+migrat 2023 total effective fl		8.83E-03 7.09E+15		
Calc Cs-137 conc =		1.25E-06	pCi/mL	

Ratios of Measured/Calculated Conc. of Cs-137 in fish

Ratios of Measured/Calculated Con	c. of CS-13 / in fish			
Year	Ratio	Year	Ratio	
1985	5.2	2006	0.39	
1986	8.4	2007	0.6	
1987	3.0	2008	0.56	
1988	1.4	2009	0.45	
1989	1.2	2010	1.3	
1990	6.8	2011	0.34	
1991	25.3	2012	0.5	
1992	1.2	2013	2.36	
1993	1.1	2014	0.77	
1994	1.4	2015	4.33	
1995	3.1	2016	2.69	
1996	1.3	2017	24.9	
1997	2.6	2018	13.26	
1998	1.2	2019	25.45	
1999	2.3	2020	2.49	
2000	1.1	2021	16.44	
2001	0.8	2022	19.89	
2002	2.1	2023	18.97	
2003	0.54			
2004	0.27			
2005	0.42			

NOTE: FOR 2023, THE CALCULATED CS-137 EFFLUENT RELEASE VALUE OF 0.167 CURIE WAS USED IN THE DOSE CALCULATIONS INSTEAD OF THE MEASURED EFFLUENT RELEASE VALUE OF 0.00883 CURIE.

Data Table A-10 – *Support*. Adjustment of Cs-137 Liquid Releases Based on Fish Concentrations Adjustment of Cs-137 Liquid Release Based on Fish Concentrations

		Number of	Cs-137, pCi/g	# comp X avg. conc.
Location	Species	Composites	Average	pCi/g
Near				
River Mile 141.5	bass	3	4.26E-02	1.28E-01
	panfish	3	7.07E-02	2.12E-01
	catfish	3	9.04E-02	2.71E-01
	flathead	3	7.98E-02	2.39E-01
	Total Composites	12	Sum =	8.51E-01
		Overall weighted ave	rage>	7.09E-02

Cesium-137 Measured Mean Concentrations in Steel Creek Fish

Data Table A-11. Representative Person Dose – All Liquid Pathways Including Irrigation Data Table A-11, Representative Person Dose - All Liquid Pathways Including Irrigation

By Pathway

Representative Person Dose, mrem ^(a)	Percent of Total Dose
3.6E-02	25.2%
7.2E-03	5.0%
3.1E-03	2.1%
8.7E-02	60.0%
1.0E-02	7.2%
6.4E-04	0.4%
2.7E-06	0.0%
1.4E-01	
	3.6E-02 7.2E-03 3.1E-03 8.7E-02 1.0E-02 6.4E-04 2.7E-06

By Radionuclide

Radionuclide	Representative Person Dose, mrem ^(a)	Percent of Total Dose
H-3 (oxide)	6.8E-03	4.7%
C-14	1.4E-05	0.0%
Sr-90	3.9E-03	2.7%
Tc-99	2.4E-03	1.6%
I-129	6.2E-03	4.3%
Cs-137	9.4E-02	64.9%
U-234	6.8E-03	4.7%
U-235	4.4E-04	0.3%
U-238	7.4E-03	5.1%
Np-237	3.5E-06	0.0%
Pu-238	7.1E-05	0.0%
Pu-239	2.8E-05	0.0%
Am-241	8.5E-05	0.1%
Cm-244	1.7E-05	0.0%
Alpha	4.8E-03	3.3%
Nonvolatile Beta	1.2E-02	8.2%
Total	1.4E-01	

a) Committed effective dose

 Data Table A-11 – Support. Representative Person Dose – All Liquid Pathways

 Representative Person Dose - Liquid Pathways Except
 Irrigation

 Irrigation
 Irrigation Pathway Doses from IRRIDOSE

By Pathway

	LADTAPXL Representative Person Dose,	IRRIDOSE (Irrigation Pathway) Representative Person				
Pathway	mrem ^(a)	Food Type	mrem			
Fish Consumption	8.7E-02	Vegetable	3.6E-02			
Water Consumption	1.0E-02	Milk	7.2E-03			
Shoreline	6.4E-04	Meat	3.1E-03			
Swimming and Boating	2.7E-06					
Total	9.8E-02	Total	4.7E-02			

By Radionuclide

	LADTAPXL Representative Person Dose,	IRRIDOSE	(Irrigation Pathway) Representative Person
Radionuclide	mrem ^(a)	Radionuclide	Dose, mrem
H-3 (oxide)	3.9E-03	H-3 (oxide)	2.9E-03
C-14	3.8E-07	C-14	1.4E-05
Sr-90	3.4E-04	Sr-90	3.6E-03
Tc-99	1.6E-06	Tc-99	2.3E-03
I-129	1.2E-03	I-129	5.0E-03
Cs-137	8.6E-02	Cs-137	7.2E-03
U-234	1.3E-03	U-234	5.5E-03
U-235	8.7E-05	U-235	3.5E-04
U-238	1.5E-03	U-238	5.9E-03
Np-237	1.1E-06	Np-237	2.4E-06
Pu-238	2.7E-05	Pu-238	4.4E-05
Pu-239	1.1E-05	Pu-239	1.7E-05
Am-241	6.1E-05	Am-241	2.4E-05
Cm-244	6.6E-06	Cm-244	1.1E-05
Alpha	1.8E-03	Alpha	2.9E-03
Nonvolatile Beta	1.0E-03	Nonvolatile Beta	1.1E-02
Total	9.8E-02	Total	4.7E-02

a) Committed effective dose

Data Table A-12. Comparisons of 2019 – 2023 Offsite Doses

Data Table A-12, Comparison of 2019-2023 Offsite Doses

	<u>2019</u>	<u>2020</u>	<u>2021</u>	<u>2022</u>	<u>2023</u>	2023 vs 2022
Atmospheric Releases						%
Representative Person, mrem ^(a)						
All Pathways	1.8E-02	1.2E-02	1.7E-02	1.6E-02	1.6E-02	0.2%
Population, person-rem						
50-mile (80-km) Population	7.0E-01	5.4E-01	7.3E-01	7.5E-01	7.3E-01	-2.6%
Liquid Releases						
Representative Person, mrem ^(a)						
All Pathways Except Irrigation	1.1E-01	2.5E-01	2.0E-01	1.2E-01	9.8E-02	-18.2%
Irrigation Pathway	5.0E-02	1.0E-01	8.6E-02	4.8E-02	4.7E-02	-2.6%
	1.6E-01	3.5E-01	2.8E-01	1.7E-01	1.4E-01	-13.7%
Population, person-rem						
Down River Population	9.5E-01	1.4E+00	1.4E+00	9.8E-01	1.3E+00	29.0%
Irrigation Pathway at RM 141.5	1.1E+00	2.3E+00	1.9E+00	1.0E+00	1.0E+00	-0.8%
	2.1E+00	3.7E+00	3.3E+00	2.0E+00	2.3E+00	13.8%
Total Representative Person (Air + Liquid + Irrigation) (mrem)	0.18	0.36	0.30	0.18	0.16	-12.5%
Total Population (Air + Liquid + Irrigation) (person-rem)	2.8	4.2	4.0	2.7	3.0	9.4%

a. In 2012, SRS changed from the MEI to the Representative Person concept for dose compliance.

	Representative Person	Percent of	Representative Person	Percent of
Radionuclide	Dose, mrem ^(a)	Total Dose	Dose, mrem ^(b)	Total Dose
H-3 (oxide)	2.8E-02	81%	3.8E-03	36%
C-14	3.3E-07	0%	3.3E-07	0%
Sr-90	3.0E-04	1%	3.0E-04	3%
Tc-99	8.5E-07	0%	8.5E-07	0%
I-129	6.7E-04	2%	6.7E-04	6%
Cs-137	1.1E-03	3%	1.1E-03	10%
U-234	1.2E-03	4%	1.2E-03	12%
U-235	7.9E-05	0%	7.9E-05	1%
U-238	1.3E-03	4%	1.3E-03	13%
Np-237	6.9E-07	0%	6.9E-07	0%
Pu-238	1.5E-05	0%	1.5E-05	0%
Pu-239	1.2E-03 4% 7.9E-05 0% 1.3E-03 4% 6.9E-07 0%		5.9E-06	0%
Am-241	$\begin{array}{ccccc} 6.7E-04 & 2\% \\ 1.1E-03 & 3\% \\ 1.2E-03 & 4\% \\ 7.9E-05 & 0\% \\ 1.3E-03 & 4\% \\ 6.9E-07 & 0\% \\ 1.5E-05 & 0\% \\ 5.9E-06 & 0\% \\ 8.4E-06 & 0\% \end{array}$		8.4E-06	0%
Cm-244	3.7E-06	0%	3.7E-06	0%
Alpha	1.0E-03	3%	1.0E-03	10%
Nonvolatile Beta	8.9E-04	3%	8.9E-04	9%
Total	3.5E-02		1.0E-02	

Data Table A-13. Representative Person Drink Water Dose Data Table A-13, Representative Person Drinking Water Dose

a) Based on Tritium Measurements from the BJSWA Purrysburg Treatment Plant. This includes Plant Vogtle and BLLWF releases

b) Based on SRS-Only releases of tritium

Data Table A-14. Collective Drinking Water Doses (person-rem) from SRS Only Data Table A-14, Collective Drinking Water Doses (person-rem) from SRS Only

For the Beaufort Jasper Water and Sewer Authority Chelsea and Purrysburg Water Treatment Plants and the Savannah Industrial and Domestic Water Treatment Plant

Radionuclide	BJWSA	BJWSA	Savannah
	Chelsea ^(a)	Purrysburg ^(b)	I&D ^(c)
Total	3.9E-01	3.1E-01	2.5E-01

a) 108,000 people served (3/14/24 email from Tricia Kilgore to Brooke Stagich)

b) 86,700 people served (3/14/24 email from Tricia Kilgore to Brooke Stagich)

c) 70,000 people served (3/19/24 email from Laura Walker to Brooke Stagich)

Data Table A-15. Collective Dose – All Liquid Pathways Including Irrigation Data Table A-15, Collective Dose - All Liquid Pathways Including Irrigation

Pathway	Collective Dose (person-rem) ^(a)	Percent of Total Dose
Sport fish	3.0E-02	1%
Commercial fish	2.1E-01	9%
Saltwater invertebrates	5.3E-02	2%
Shoreline Exposure	2.6E-02	1%
Swimming	4.8E-05	0%
Boating	2.8E-05	0%
Beaufort-Jasper (Chelsea)	3.9E-01	17%
Beaufort-Jasper (Purrysburg)	3.1E-01	14%
Savannah I&D	2.5E-01	11%
Vegetable consumption	9.8E-01	43%
Milk consumption	3.7E-02	2%
Meat consumption	1.4E-03	0%
Total	2.3E+00	

By Pathway

By Radionuclide

Radionuclide	Collective Dose (person-rem) ^(a)	Percent of Total Dose
H-3 (oxide)	3.9E-01	17%
C-14	1.1E-03	0%
Sr-90	1.2E-01	5%
Tc-99	5.6E-02	2%
I-129	1.6E-01	7%
Cs-137	4.6E-01	20%
U-234	2.5E-01	11%
U-235	1.6E-02	1%
U-238	2.7E-01	12%
Np-237	1.3E-04	0%
Pu-238	3.2E-03	0%
Pu-239	1.2E-03	0%
Am-241	1.9E-03	0%
Cm-244	8.5E-04	0%
Alpha	2.1E-01	9%
Nonvolatile Beta	3.5E-01	15%
Total	2.3E+00	

a) Committed effective dose

Irrigation Pathy	vay Doses from Irridose output
Radionuclide	Population (person-rem)
H-3 (oxide)	4.3E-02
C-14	2.1E-04
Sr-90	8.9E-02
Tc-99	5.6E-02
I-129	9.2E-02
Cs-137	1.1E-01
U-234	1.3E-01
U-235	8.3E-03
U-238	1.4E-01
Np-237	6.3E-05
Pu-238	1.2E-03
Pu-239	4.6E-04
Am-241	6.5E-04
Cm-244	2.9E-04
Alpha	7.9E-02
Nonvolatile Beta	2.7E-01

Data Table A-15 – Support. Collective Dose – All Liquid Pathways

Total

1.0E+00

Other Liquid Pathway Doses from Ladtap output

Radionuclide	Collective Dose (person-rem) ^(a)
H-3 (oxide)	3.5E-01
C-14	8.4E-04
Sr-90	2.8E-02
Tc-99	9.3E-05
I-129	6.7E-02
Cs-137	3.5E-01
U-234	1.1E-01
U-235	7.5E-03
U-238	1.3E-01
Np-237	6.7E-05
Pu-238	2.0E-03
Pu-239	7.7E-04
Am-241	1.3E-03
Cm-244	5.6E-04
Alpha	1.3E-01
Nonvolatile Beta	8.4E-02

Total

1.3E+00

Data Table A-16, R	a Table A-16, Radioactive Atmospheric Releases by Source (Curies) ^(a) 2 lionuclide Half-Life ^(b) Calculated ^(c) Reactors Separations ^(d) SRNL T Gases and Vapors													
Radionuclide	Half-Life	(b)			Separations ^(d)	SRNL	Total							
	ſ	[[ľ								
H-3 (oxide)	12.3	у	7.18E+01	3.13E+01	6.53E+03		6.63E+03							
H-3 (elemental)	12.3	у		0.00E+00	1.89E+03		1.89E+03							
H-3 Total	12.3	у	7.18E+01	3.13E+01	8.42E+03	0.00E+00	8.52E+03							
C-14	5700	у	3.52E-07		6.60E-02		6.60E-02							
Hg-203	46.6	d	4.77E-10				4.77E-10							
Kr-85	10.8	у			2.27E+04		2.27E+04							
I-129	1.57E+07	У	6.04E-05	0.00E+00	7.64E-03	0.00E+00	7.70E-03							
I-131	8.02	d	5.52E-10				5.52E-10							
				ticles										
Am-241	432	у	4.20E-07	0.00E+00	3.15E-06	1.30E-09	3.58E-06							
Am-243	7370	у	4.33E-09				4.33E-09							
Au-198	2.6952	d	2.78E-08				2.78E-08							
Ba-133	10.5	У	3.92E-09				3.92E-09							
Cd-109	461	d	1.65E-08				1.65E-08							
Ce-137	9	h	1.87E-05				1.87E-05							
Ce-139	138	d	4.71E-10				4.71E-10							
Cm-244	18.1	у	7.46E-08	0.00E+00	3.50E-08	2.99E-08	1.39E-07							
Co-57	272	d	4.51E-10				4.51E-10							
Co-60	5.27	у	1.80E-07	0.00E+00	0.00E+00	0.00E+00	1.80E-07							
Cs-134	2.06	у	1.47E-09				1.47E-09							
Cs-137	30.2	у	3.33E-03	0.00E+00	5.76E-04	0.00E+00	3.90E-03							
Eu-152	13.5	у	8.61E-09				8.61E-09							
Eu-154	8.59	у	9.53E-10				9.53E-10							
Fe-55	2.74	у	6.76E-09				6.76E-09							
K-40	1.25E+09	у	7.08E-09				7.08E-09							
Mn-54	312	d	4.51E-10				4.51E-10							
Ni-63	100	у	3.20E-09				3.20E-09							
Np-237	2.14E+06	у	1.40E-08	1.75E-10	3.08E-07	2.15E-10	3.22E-07							
Pa-234	6.7	h	2.65E-07				2.65E-07							
Pb-212	10.6	h	8.43E-07				8.43E-07							
Pu-236	2.86	у	1.21E-09				1.21E-09							
Pu-238	87.7	у	1.16E-07	0.00E+00	2.90E-06	2.45E-08	3.04E-06							
Pu-239	2.41E+04	у	4.16E-05	0.00E+00	4.53E-05	9.53E-09	8.69E-05							
Pu-240	6560	у	5.08E-07				5.08E-07							
Pu-241	14.4	у	8.96E-06				8.96E-06							
Pu-242	3.75E+05	y	3.29E-09				3.29E-09							
Ra-226	1600	у	1.16E-08				1.16E-08							
Ra-228	5.75	у	1.82E-09				1.82E-09							
Rh-106(e)	29.8	s	4.31E-09				4.31E-09							
Ru-106	374	d	4.31E-09				4.31E-09							
Sb-125	2.76	у	2.11E-09				2.11E-09							
Sn-113	115	d	6.27E-10				6.27E-10							
Sr-85	64.8	d	6.02E-10				6.02E-10							
Sr-89	50.5 d		1.12E-10				1.12E-10							
Sr-90	28.8 y		2.52E-03	0.00E+00	5.55E-05		2.58E-03							
Tc-99	2.11E+05 y		3.75E-07				3.75E-07							
Th-228	2.11E+05 y 1.91 y		1.22E-11	1.82E-09	0.00E+00		1.83E-09							
Th-229	7340	v	1.39E-09		1.39E-09									
Th-230	7.54E+04	y V	8.40E-07	2.03E-09	0.00E+00		8.42E-07							
	,.e	J	0.101 07		010011-00	I								

Data Table A-16. 2023 Radioactive Atmospheric Releases by Source (Curies)

Data Table A-16, R	ata Table A-16, Radioactive Atmospheric Releases by Source (Curies) ^(a)													
Radionuclide	Half-Life	(b)	Calculated ^(c)	Reactors	Separations ^(d)	SRNL	Total							
Th-232	1.41E+10	у	2.20E-08	1.07E-09	0.00E+00		2.31E-08							
Tl-208	3.05	m	1.41E-06				1.41E-06							
U-232	68.9	у	2.80E-09				2.80E-09							
U-233	1.59E+05	у	2.36E-07				2.36E-07							
U-234	2.46E+05	у	1.95E-05	5.05E-08	1.73E-05	2.70E-09	3.69E-05							
U-235	7.04E+08	у	4.76E-07	0.00E+00	1.42E-06	1.31E-09	1.90E-06							
U-236	2.34E+07	у	1.54E-07				1.54E-07							
U-237	6.75	d	2.21E-10				2.21E-10							
U-238	4.47E+09	у	2.83E-05	6.45E-08	2.42E-05	0.00E+00	5.26E-05							
Y-88	107	d	4.51E-10				4.51E-10							
Y-90(e)	64.1	h	2.52E-03	0.00E+00	5.55E-05		2.58E-03							
Zn-65	244	d	9.93E-10				9.93E-10							
Unidentified alpha	N/A		6.62E-05	6.06E-06	5.42E-06	8.35E-08	7.78E-05							
Unidentified beta	N/A		1.75E-04	7.24E-05	7.99E-05	3.03E-06	3.30E-04							
TOTAL	N/A		7.18E+01	3.13E+01	3.11E+04	3.19E-06	3.12E+04							

a. One curie equals 3.7E+10 Becquerels

b. ICRP 107, Nuclear Decay Data for Dosimetric Calculations (2008)

c. Estimated releases from unmonitored sources. Individual isotope annual releases below 1E-12 Ci (1 pCi) are not reported in this table and, therefore, not used in the dose calculations.

d. Includes separations, waste management, and tritium facilities

e. Daughter products (Sb-126, Rh-106 & Y-90) in secular equilibrium with source terms (Sn-126, Ru-106 & Sr-90, respectively). In MAXDOSE/POPDOSE, they are included in the source term and their ingrowth is included in their parents' source term.

Data Table A-17, 2	Data Table A-17. 2019 - 2023 Atmospheric Releases (Curies) 2019-2023 Atmospheric Releases (Curies) 2 Page 2019a 2020 2021 2022 2023 2022-2023 %Chang Gases and Vapors													
Radionuclide	2019 ^a				2023	2022-2023 %Change								
H-3 (oxide)	7.94E+03	5.82E+03	7.51E+03	6.49E+03	6.63E+03	2%								
H-3 (elemental)	1.31E+03	1.21E+03	1.60E+03	3.10E+03	1.89E+03	-39%								
H-3 Total	9.25E+03	7.03E+03	9.11E+03	9.59E+03	8.52E+03	-11%								
C-14	5.00E-02	5.00E-02	6.20E-02	4.10E-02	6.60E-02	61%								
Hg-203	6.51E-10	5.42E-10	5.26E-10	4.02E-10	4.77E-10	19%								
Kr-85	1.07E+04	7.37E+03	1.68E+04	1.30E+04	2.27E+04	74%								
I-129	9.99E-03	4.16E-03	5.57E-03	7.08E-03	7.70E-03	9%								
I-131	7.01E-10	5.49E-10	7.10E-10	6.67E-10	5.52E-10	-17%								
	4 405 44	1 105 11	Particles	1	0.007.00	1000/								
Ag-110m	1.48E-11	1.48E-11	1.48E-11	1.48E-11	0.00E+00	-100%								
Am-241	1.73E-05	1.95E-05	2.37E-05	1.47E-05	3.58E-06	-76%								
Am-243	3.97E-09	4.24E-09	3.61E-07	3.69E-09	4.33E-09	17%								
Au-198					2.78E-08									
Ba-133	7.74E-07	6.90E-07	6.55E-07	1.01E-08	3.92E-09	-61%								
Be-7				1.17E-11	0.00E+00	-100%								
Cd-109	1.68E-08	1.05E-08	1.36E-08	0.00E+00	1.65E-08									
Ce-137					1.87E-05	/								
Ce-139	6.71E-10	4.73E-10	5.18E-10	3.78E-10	4.71E-10	25%								
Ce-141	4.94E-11	4.94E-11	4.94E-11	4.94E-11	0.00E+00	-100%								
Ce-144	2.00E-08	2.00E-08	2.00E-08	2.00E-08	0.00E+00	-100%								
Cm-243	2.90E-09	1.76E-09		1.47E-08	0.00E+00	-100%								
Cm-244	2.99E-07	3.02E-07	3.17E-07	3.12E-07	1.39E-07	-55%								
Co-56				1.20E-10	0.00E+00	-100%								
Co-57	6.41E-10	4.24E-10	4.95E-10	5.12E-07	4.51E-10	-100%								
Co-58				0.00E+00	0.00E+00									
Co-60	6.30E-07	6.37E-07	3.39E-06	2.65E-06	1.80E-07	-93%								
Cs-134	4.32E-07	4.31E-07	4.31E-07	3.42E-10	1.47E-09	329%								
Cs-137	3.88E-03	4.67E-03	8.23E-03	1.40E-02	3.90E-03	-72%								
Eu-152	1.90E-09	8.96E-09	9.21E-09	8.82E-09	8.61E-09	-2%								
Eu-154	3.56E-07	3.56E-07	7.11E-07	3.56E-07	9.53E-10	-100%								
Eu-155	1.18E-07	1.18E-07	1.18E-07	1.18E-07	0.00E+00	-100%								
F-18	4.00E-02	0.00E+00	1.00E-02	0.00E+00	0.00E+00									
Fe-55	8.04E-09	3.64E-09	3.76E-08	7.09E-09	6.76E-09	-5%								
K-40				7.47E-09	7.08E-09	-5%								
La-140				5.00E-06	0.00E+00	-100%								
Mn-54	6.01E-10	4.24E-10	4.55E-10	2.91E-07	4.51E-10	-100%								
Na-22				1.50E-05	0.00E+00	-100%								
Nb-94	2.42E-07	2.42E-07	2.42E-07	2.42E-07	0.00E+00	-100%								
Nb-95	3.63E-07	3.63E-07	3.63E-07	3.63E-07	0.00E+00	-100%								
Ni-59	5.76E-11	5.76E-11	3.67E-07	5.76E-11	0.00E+00	-100%								
Ni-63	7.41E-09	7.26E-09	4.55E-05	5.56E-09	3.20E-09	-42%								
Np-237	1.61E-06	1.69E-06	1.68E-06	1.64E-06	3.22E-07	-80%								
Pa-233	1.42E-06	1.42E-06	1.42E-06	1.42E-06	0.00E+00	-100%								
Pa-234					2.65E-07									
Pb-212	8.43E-07	8.43E-07	8.43E-07	8.43E-07	8.43E-07	0%								
Pm-147	2.89E-06	2.89E-06	2.89E-06	2.89E-06	0.00E+00	-100%								

Data Table A-17. 2019 - 2023 Atmospheric Releases (Curies)

Data Table A-17, 2	019-2023 At	mospheric I	Releases (Cu	ries)	1	2 Pages
Radionuclide	2019 ª	2020	2021	2022	2023	2022-2023 %Change
Pm-148m	1.90E-12	1.90E-12	1.90E-12	1.90E-12	0.00E+00	-100%
Pr-144	2.00E-08	2.00E-08	2.00E-08	2.00E-08	0.00E+00	-100%
Pu-236	5.52E-10	5.30E-10	4.56E-10	4.21E-10	1.21E-09	187%
Pu-238	3.57E-05	3.51E-05	3.56E-05	4.68E-05	3.04E-06	-94%
Pu-239	1.38E-04	1.60E-04	1.63E-04	1.18E-04	8.69E-05	-26%
Pu-240	7.68E-06	7.69E-06	2.54E-05	7.68E-06	5.08E-07	-93%
Pu-241	2.07E-04	2.07E-04	2.37E-04	2.07E-04	8.96E-06	-96%
Pu-242	3.28E-06	5.29E-06	2.68E-05	2.67E-08	3.29E-09	-88%
Ra-226	5.97E-07	2.95E-07	4.04E-07	2.66E-07	1.16E-08	-96%
Ra-228	5.93E-07	3.12E-07	4.07E-07	2.65E-07	1.82E-09	-99%
Rh-106	3.05E-06	2.82E-05	3.04E-06	1.68E-05	4.31E-09	-100%
Ru-103	5.11E-10	5.11E-10	5.11E-10	5.11E-10	0.00E+00	-100%
Ru-106	3.05E-06	2.82E-05	3.04E-06	1.68E-05	4.31E-09	-100%
Sb-125	1.18E-06	1.18E-06	1.18E-06	1.18E-06	2.11E-09	-100%
Sb-125 Sb-126	1.70E-07	1.70E-07	1.70E-07	1.70E-07	0.00E+00	-100%
Sc-46	1.702 07	1.702.07	1.702 07	1.72E-10	0.00E+00	-100%
Se-79	4.90E-09	4.90E-09	4.90E-09	4.90E-09	0.00E+00	-100%
Sm-151	2.89E-06	2.89E-06	2.89E-06	2.89E-06	0.00E+00	-100%
Sn-113	2.89E-00 8.31E-10	6.05E-10	6.30E-10	4.56E-10	6.27E-10	38%
Sn-123	6.66E-12	6.66E-12	6.66E-12	4.50E-10 6.66E-12	0.00E+00	-100%
Sn-125 Sn-126	1.70E-07	1.70E-07	1.70E-07	1.70E-07	0.00E+00	-100%
Sr-85	7.61E-10	5.63E-10	5.82E-10	4.68E-10	6.02E-10	29%
Sr-89	5.99E-10	5.67E-10	5.40E-10	4.08E-10 4.93E-10	1.12E-10	-77%
						-18%
Sr-89,90	3.35E-03	3.02E-03	2.87E-03	3.13E-03	2.58E-03	
Tc-99	5.08E-05	5.09E-05	5.08E-05	6.02E-05	3.75E-07	-99%
Te-127	1.04E-11	1.04E-11	1.04E-11	1.04E-11	0.00E+00	-100%
Te-129	1.05E-12	1.05E-12	1.05E-12	1.05E-12	0.00E+00	-100%
Th-228	1.61E-08	1.68E-08	1.51E-08	1.14E-08	1.83E-09	-84%
Th-229	1.34E-09	1.23E-09	1.23E-09	1.05E-09	1.39E-09	32%
Th-230	6.61E-09	4.75E-09	5.06E-09	5.95E-09	8.42E-07	14060%
Th-231	2.12E-04	2.12E-04	2.12E-04	2.12E-04	0.00E+00	-100%
Th-232	3.14E-09	3.22E-09	2.69E-09	1.73E-09	2.31E-08	1232%
T1-208	1.41E-06	1.41E-06	1.41E-06	1.41E-06	1.41E-06	0%
U-232	5.50E-09	5.57E-09	5.35E-09	5.48E-09	2.80E-09	-49%
U-233	3.42E-09	3.74E-10	2.89E-08	1.24E-08	2.36E-07	1808%
U-234	2.72E-05	3.54E-05	3.17E-05	2.37E-05	3.69E-05	56%
U-235	1.37E-06	2.22E-06	1.83E-06	1.38E-06	1.90E-06	38%
U-236	3.01E-08	3.01E-08	3.01E-08	3.97E-08	1.54E-07	288%
U-237			100-01		2.21E-10	
U-238	3.55E-05	4.67E-05	4.03E-05	3.13E-05	5.26E-05	68%
Y-88	5.81E-10	4.38E-10	5.18E-10	3.60E-10	4.51E-10	25%
Y-90	3.35E-03	3.02E-03	2.87E-03	3.13E-03	2.58E-03	-18%
Y-91	2.14E-09	7.98E-10	7.98E-10	7.98E-10	0.00E+00	-100%
Zn-65	5.82E-10	8.62E-10	9.41E-10	1.64E-06	9.93E-10	-100%
Zr-95	1.22E-07	1.22E-07	1.22E-07	1.22E-07	0.00E+00	-100%
Unidentified Alpha	4.19E-05	5.19E-05	3.88E-05	1.03E-04	7.78E-05	-25%
Unidentified Beta	1.19E-03	9.51E-04	1.02E-03	7.38E-04	3.30E-04	-55%

a. Individual isotope annual releases below 1E-12 Ci (1 pCi) are not reported in this table.

SRNL-STI-2024-00262 Revision 0

sured Averages sured Averages tion dale Gate well Gate ade 8 ade 8 ade 8 ade 8 ade 8 ade 7 a Gate ralatha ⁽¹⁾ Talatha ⁽¹⁾ Talatha ⁽¹⁾	19763 E 18726 E 18726 E 18726 E 18726 E 13728 E 13728 E 13728 E 1342 swimum 13482 nimum 13482 sam 13482 easured Averages of HTO C 13482 easured Averages of HTO C 13482 variannwell Gate 13482 annouell Gate 13483 annouell Gate 13483 arricade 8 13474 Area 13474 arricade 8 14763 arri	19763 2E 18726 2E 18726 2E 13728 2E 13728 2E 13728 2E 13728 2E 13728 2E 13728 2E 1342 swimum 13482 nimum 4 easured Averayes of HTO C casured Averayes of HTO C casured Averayes of HTO C varicade 8 arricade 8	19763 E 18726 E 18726 E 18726 E 15788 E 15788 III 13482 sximum 13482 sximo 13482<	19763 E 18726 E 18726 E 18726 E 15788 E 15788 E 14701 IE 13482 sximum 13482 annum 13482 sximum 13482 annum 13482 sximum 13482 annum 13482 sinum 13482 sinumvell Gate sinumvell Gate sinurade 8 Area sinumed 8 Area sinumed 8 Area sinumed 9 14701 ginvays 13 8/167 1487	19763 E 18726 E 18726 E 18726 IE 15788 IE 15788 IE 13422 Immun 13482 IE 1484 IE 1484 IE 1484 IE 1484 I	19763 2E 18726 3E 18726 18726 18125 3E 19763 4E 19728 16220 16220 16 15788 16 13482 swimum 13482 nimum 13482 swimum 13482 swimum 4 easured Averayes of HTO C casured Averayes of HTO C varicade Bate arrivade 8 arrivade 8	19763 2E 18726 3E 18726 3E 18726 3E 13728 3E 15788 1E 15788 1E 13482 sximum 13482 sximum 13482 asynthetic action 13482 easured Averages of HTO C C casured Averages of HTO C C ammovell Gate 347ea arkhorse 47ea	3E 19763 3E 18726 3E 18726 3E 18726 3E 13728 1E 15788 1E 14701 4E 13482 sximum 13482 san 13482 annuvell Gate 13482 annvell Gate 13482 annvell Gate 4 annicade 8 4	19763 2 18726 3 18726 3 18726 3 18726 3 18728 16220 15788 16 15788 1 13482 14 13482 sximum 13482 animum 13482 easured Averayes of HTO C 13482 casured Averayes of HTO C 13482 pincidae Gate 13482 anicade 8 13482	19763 18726 18726 18726 18726 18728 15728 15728 15728 15728 15728 15728 15728 15728 15728 15728 15728 15728 13482 13482 14 13482 13482 13482 13482 13482 13482 13482 13483 14 15 14 15 14 15 14 15 14 15 15 16 17 18 19 19 10 10 10 10 11	19763 2 18726 3/2 18726 2 18726 2 13728 2 15788 2 14701 2 13482 <th>19763 2: 18726 3: 18726 2: 18125 2: 13728 2: 15768 2: 14701 VE 13482 aximum 13482</th> <th>32 19763 32 18726 32 18726 32 18125 32 13728 32 15788 32 14701 UE 13482 aximum 13482 an 13482 an 13482</th> <th>32 19763 2 18726 2 18125 2 13728 2 13728 2 15768 2 14701 VE 13482 2 13482 3ximum 13482 3ximum 13482 3ximum 13482 3ximum 13482</th> <th></th> <th>DOM 19045</th> <th></th> <th><</th> <th></th> <th>~</th> <th></th> <th>NNW 12280</th> <th>Sector <u>m</u></th> <th>Distance</th> <th></th> <th>8.52E+03 Total</th> <th></th> <th>4 00F±04 at 24 m</th> <th>7.18E+01 at 0 m</th> <th>oncentration Cal</th> <th></th> <th>MAXDOSE-SR</th> <th></th> <th>)ata</th> <th>Averane Co</th> <th></th> <th>Data Table 6-18, Comparison of Measured vs. Calculated Tritium in Air Concentrations</th> <th></th>	19763 2: 18726 3: 18726 2: 18125 2: 13728 2: 15768 2: 14701 VE 13482 aximum 13482	32 19763 32 18726 32 18726 32 18125 32 13728 32 15788 32 14701 UE 13482 aximum 13482 an 13482 an 13482	32 19763 2 18726 2 18125 2 13728 2 13728 2 15768 2 14701 VE 13482 2 13482 3ximum 13482 3ximum 13482 3ximum 13482 3ximum 13482											DOM 19045		<		~		NNW 12280	Sector <u>m</u>	Distance		8.52E+03 Total		4 00F±04 at 24 m	7.18E+01 at 0 m	oncentration Cal		MAXDOSE-SR)ata	Averane Co		Data Table 6-18, Comparison of Measured vs. Calculated Tritium in Air Concentrations	
1.667E-08 2.110E-08 2.266E-08 3.208E-08 3.208E-08 3.208E-08 3.208E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 3.2 5.2 5.2 5.2 5.1 5.2 5.2 5.2 5.2 5.2 5.2 5.2 5.2 5.2 5.2	1.667E-08 2.110E-08 2.266E-08 3.208E-08 3.502E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.8 5.2 5.2 5.2 5.2 5.2 5.2 5.2 5.2 5.2 5.2	1.667E-08 2.110E-08 2.266E-08 3.208E-08 3.502E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.855E	1.667E-08 2.110E-08 2.2946E-08 3.208E-08 3.208E-08 3.208E-08 1.835E-08 9.100E-08 1.835E-08 9.100E-08 9.100E-08 9.100E-08 9.100E-08 9.100E-08 9.20E-	1.667E-08 2.110E-08 2.266E-08 3.208E-08 3.502E-09 1.835E-08 01 1.835E-08 1.835E-08 3.3 3.2 7.4 5.2 5.2 5.2	1.667E-08 2.110E-08 2.266E-08 3.208E-08 3.502E-09 1.835E-08 1.835E-08 9.67 9.67 9.7.4 3.2 3.3 5.2 5.2 5.1 4.3	1.667E-08 2.110E-08 2.266E-08 3.208E-08 8.502E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 5.2 5.2 5.2 5.1	1.667E-08 2.110E-08 2.266E-08 3.208E-08 3.208E-08 8.502E-09 8.502E-09 0.108E-08 0.108E-08 9.019E-08 9.019E-08 9.019E-08 9.019E-08 9.019E-08 9.029E	1.667E-08 2.110E-08 2.266E-08 3.208E-08 3.502E-09 1.835E-08 1.835E-08 0f Air 3.2 3.2 7.4	1.667E-08 2.110E-08 2.266E-08 3.208E-08 8.502E-09 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.835E-08 1.67E-08 1.97E-0	1.667E-08 2.110E-08 2.266E-08 3.208E-08 8.502E-09 1.835E-08 1.335 1.835E-08 1.335 1.835E-08 1.3355 1.33555 1.33555 1.335555 1.335555555555	1.667E-08 2.110E-08 2.266E-08 3.208E-08 8.502E-09 1.835E-08 9.1.835E-08 9.00 1.835E-08 9.00 1.835E-08 3.2 9.01 9.01 9.01 9.01 9.01 9.01 9.01 9.01	1.667E-08 2.110E-08 2.266E-08 3.206E-08 3.208E-08 3.502E-09 1.835E-08 0 r.centration ir p Clim ³ of Air	1.667E-08 2.110E-08 2.266E-08 2.946E-08 3.208E-08 8.502E-09 8.502E-09 1.835E-08	1.667E-08 2.110E-08 2.266E-08 3.208E-08 8.502E-09 1.835E-08	1.667E-08 2.110E-08 2.946E-08 3.208E-08 8.502E-09 1.835E-08	1.667E-08 2.110E-08 2.266E-08 3.208E-08	1.667E-08 2.110E-08 2.266E-08 2.946E-08	1.667E-08 2.110E-08 2.266E-08	1.667E-08 2.110E-08	1.667E-08		1.964E-08	1.086E-08	8.791E-09	8.502F-00	1.828E-08	1.453E-08	1.735E-08	1.694E-08	2.000E-08	2.517F-08	sec/m	U-m	D I					culated from C	4.1		4.6	Site Boundary	Average Concentration at		of Measured vs	
5.162-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 Air at Site Pet	5.162-02 6.710E-02 7.307E-02 1.997E-02 4.179E-02 Air at Site Pet	5.162E-02 6.710E-02 7.307E-02 1.997E-02 4.179E-02 Air at Site Pet	5.162E-02 6.710E-02 7.307E-02 1.997E-02 4.179E-02 Air at Site Per	5.162-02 6.710E-02 1.937E-02 1.937E-02 4.179E-02 Air at Site Pet	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 Air at Site Pet	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 Air at Site Per	5.162E-02 6.710E-02 7.307E-02 1.997E-02 4.179E-02 Air at Site Pet	5.162-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 Air at Site Per	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 Air at Site Pei	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 Air at Site Per	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 • Air at Site Pet	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 Air at Site Pet	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 4.179E-02	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02 4.179E-02	5.162E-02 6.710E-02 7.307E-02 1.937E-02 4.179E-02	5.162E-02 6.710E-02 7.307E-02	5.162E-02 6.710E-02	5.162E-02		4.806E-02	3.797E-02	4.474E-02	2.474E-02	2.002E-02	1 937E-02	4.164E-02	3.310E-02	3.952E-02	3.859E-02	4.556E-02	5 733E-02	PC/m"	Concentration						hi/Q based on							. Calculated Tr	
3.122E-08 8.208E-09 1.785E-08 imeter	3.122E-08 8.208E-09 1.785E-08 imeter	3.122E-08 8.208E-09 1.785E-08 imeter	3.122E-08 8.208E-09 1.785E-08 imeter	3.122E-08 8.208E-09 1.785E-08 imeter	3.122E-08 8.208E-09 1.785E-08 imeter	3.122E-08 8.208E-09 1.785E-08 imeter	3.122E-08 8.208E-09 1.785E-08 imeter	2.851E-08 3.122E-08 8.208E-09 1.785E-08 imeter	3.122E-08 8.208E-09 1.785E-08 imeter	2.851E-08 3.122E-08 8.208E-09 1.785E-08 imeter	2.851E-08 3.122E-08 8.208E-09 1.785E-08 imeter	2.851E-08 3.122E-08 8.208E-09 1.785E-08 imeter	2.851E-08 3.122E-08 8.208E-09 1.785E-08 imeter	2.851E-08 3.122E-08 8.208E-09 1.785E-08	2.851E-08 3.122E-08 8.208E-09 1.785E-08	2.851E-08 3.122E-08	2.851E-08		2.199E-08	2.060E-08	1.628E-08	1.907E-08	1.050E-08	8.472E-09	8 208E-09	1.786E-08	1.433E-08	1.707E-08	1.656E-08	1.948E-08	2.122E-00	sec/m3							Total (HTO & E							itium in Air Co	
5.557E-01 1.209E+00	1.209E+00 1.209E+00	5.557E-01 1.209E+00	5.557E-01 1.209E+00	5.557E-01 1.209E+00	5.557E-01 1.209E+00	5.557E-01 1.209E-00	5.57E-01 1.209E+00	5.557E-01 1.209E+00	5.557E-01 1.209E+00	5.557E-01 1.209E+00	5.557E-01 1.209E+00	5.557E-01 1.209E+00	2.114E+00 5.557E-01 1.209E+00	2.114E+00 5.557E-01 1.209E+00	2.114E+00 5.557E-01 1.209E+00	2.114ETUV	MITTWLL .	1.930E+00	1.489E+00	1.395E+00	1.102E+00	1.291E+00	7.109E-01	5.736E-01	5 557E-01	1.209E+00	9.701E-01	1.156E+00	1.121E+00	1.319E+00	1 647F+00	pCi/m"	oncentration						lemental Triti							oncentrations	
																1.740E-08	3.043E-08	2.765E-08	2.139E-08	2.015E-08	1.591E-08	1.855E-08	1.018E-08	8.183E-09	7 941F_09	1.746E-08	1.414E-08	1.680E-08	1.622E-08	1.901E-08	2 357F-08	3 DAGE NO							um) Curies R	7.2	r.o	5.1	North Sector ^(a)	Concentration in the			
																5.518E-03	9.649E-03	8.77E-03	6.78E-03	6.39E-03	5.05E-03	5.88E-03	3.23E-03	2.59E-03	0.57F_03	5.54E-03	4.48E-03	5.33E-03	5.14E-03	6.03E-03	7 47F-03	D GEE NO	oncentration	2014-2018 Chi/Q					eleased (Cily)		_		ector ^(a)	ion in the			
																1.640E-08	2.869E-08	2.574E-08	2.005E-08	1.913E-08	1.511E-08	1.741E-08	9.466E-09	7.545E-09	7.353E-00	1.660E-08	1.372E-08	1.620E-08	1.546E-08	1.796E-08	2 190F-08			1										a,	•		
																1.293E+00	2.262E+00	2.03E+00	1.58E+00	1.51E+00	1.19E+00	1.37E+00	7.46E-01	5.95E-01	5.80F-01	1.31E+00	1.08E+00	1.28E+00	1.22E+00	1.42E+00	1 73F+00	D DEELAN	Concentration														
																1.325E-08	2.318E-08	1.986E-08	1.589E-08	1.586E-08	1.253E-08	1.389E-08	7.264E-09	5.592E-09	5.547E-09	1.384E-08	1.223E-08	1.416E-08	1.297E-08	1.465E-08	1 679F-08																
																6.199E-01	1.084E+00	9.29E-01	7.43E-01	7.42E-01	5.86E-01	6.50E-01	3.40E-01	2.62E-01	2.50E-01	6.47E-01	5.72E-01	6.62E-01	6.07E-01	6.85E-01	7.85F-01	1 not no	Concentration														
																1.287E-08	2.250E-08	1.916E-08	1.539E-08	1.546E-08	1.221E-08	1.348E-08	7.004E-09	5.364E-09	5 335E-09	1.350E-08	1.203E-08	1.389E-08	1.265E-08	1.424E-08	1 619F-00																
																9.573E-01	2 069E 04	1.425E+00	1.145E+00	1.150E+00	9.081E-01	1.003E+00	5.209E-01	3.989E-01	3.968F_01	1.004E+00	8.947E-01	1.033E+00	9.408E-01	1.059F+00	1 204F+00	1 6795.00	Concentration														
																4.126E+00	1.216E+00	6.4	5.0	4.8	3.8	4.4	23	1.0	1.8	4.2	3.6	4.2	3.9	4.5	5.4)=														

Data Table A-18. Comparison of Measured vs. Calculated Tritium in Air Concentrations

Data Table A-19a. MAXDOSE-SR Representative Person Dose Using Cow Milk Pathway Data Table A-19a, MAXDOSE-SR Representative Person Dose Using Cow Milk Pathway 2023 MAXDOSE-SR Representative Person Dose Using Cow Milk Pathway

Pathway	Representative Person Dose (mrem) ^(a)	Percent of Total Dose
Plume	1.2E-03	7.65%
Ground	3.8E-04	2.33%
Inhalation	5.1E-03	31.48%
Vegetation	5.7E-03	35.06%
Cow Milk	3.5E-03	21.36%
Meat	3.4E-04	2.12%
Total	1.6E-02	100.0%

Radionuclide	Maximally Exposed Individual Dose (mrem) ^(a)	Percent of Total Dose ^(b)						
Gases and Vapors								
Н-3	1.2E-02	72.22%						
C-14	1.4E-05	0.09%						
K-85	1.2E-03	7.65%						
I-129	2.5E-03	15.56%						
Particulates								
Cs-137	3.4E-04	2.09%						
Pu-238	1.8E-06	0.01%						
Pu-239	6.4E-05	0.39%						
Sr-90	2.2E-04	1.36%						
U-234	3.4E-06	0.02%						
U-238	6.1E-06	0.04%						
Unidentified Alpha	6.1E-05	0.38%						
Unidentified Beta	2.7E-05	0.16%						
Total	1.6E-02	100.0%						

NOTE: (a) Committed effective dose

NOTE: (b) Radionuclides contributing 0.01% or more of the total dose

Data Table A-19b. MAXDOSE-SR Potential Dose to TRL Industrial Worker Data Table A-19b, Potential Dose to an Adult Worker at Three Rivers Landfill

2000 h/y exposure via inhalation and shine.

Pathway	Industrial Worker Dose at TRL (mrem) ^(a)	Percent of Total Dose
Shine Dose ^(b)	5.54E-03	51.34%
Inhalation	5.25E-03	48.66%
Total	1.08E-02	100.0%

NOTE: (a) Committed effective dose

NOTE: (b) Shine dose is the total of both plume shine and ground shine output from MAXINE

Data Table A-20. Sector- Specific Representative Person Airborne Pathway Doses (Using Cow Milk Pathway)

Data Table A-20, Sector-Specific Representative Person Airborne Pathway Doses (Using Cow Milk Pathway)

2023 Representative Person Airborne Pathway Doses

N ^(a)	0.016
NNE	0.014
NE	0.012
ENE	0.011
Е	0.011
ESE	0.008
SE	0.005
SSE	0.004
S	0.004
SSW	0.006
SW	0.010
WSW	0.012
W	0.011
WNW	0.010
NW	0.012
NNW	0.015

NOTE: (a) Maximum Location

Data Table A-21. MAXDOSE-SR Representative Person Dose Using Goat Milk Pathway Data Table A-21, MAXDOSE-SR Representative Person Dose Using Goat Milk Pathway 2023 Representative Person Dose Using Goat Milk Pathway

Pathway	Percent of Total Dose	
Plume	1.2E-03	6.80%
Ground	3.8E-04	2.07%
Inhalation	5.1E-03	27.96%
Vegetation	5.7E-03	31.14%
Goat Milk	5.5E-03	30.15%
Meat	3.4E-04	1.89%
Total	1.8E-02	100.0%

Radionuclide	Maximally Exposed Individual Dose (mrem) ^(a)	Percent of Total Dose ^(b)
Gases and Vapors		
Н-3	1.3E-02	72.53%
C-14	1.5E-05	0.08%
Kr-85	1.2E-03	6.81%
I-129	3.0E-03	16.21%
Particulates		
Cs-137	4.3E-04	2.34%
Pu-238	1.8E-06	0.01%
Pu-239	6.4E-05	0.35%
Sr-90	2.3E-04	1.25%
U-234	3.3E-06	0.02%
U-238	6.0E-06	0.03%
Unidentified Alpha	6.1E-05	0.33%
Unidentified Beta	2.6E-05	0.14%
Total	1.8E-02	100.0%

NOTE: (a) Committed effective dose

NOTE: (b) Radionuclides contributing 0.01% or more of the total dose

Data Table A-22. POPDOSE-SR Population Doses from Airborne Releases

Data Table A-22, POPDOSE-SR Population Dose from Airborne Releases 2023 Population Dose from Airborne Releases

Pathway	Population Dose (person-rem) ^(a)	Percent of Total Dose
Plume	1.0E-01	14.30%
Ground	3.5E-02	4.77%
Inhalation	4.6E-01	63.5%
Vegetation	1.9E-02	2.64%
Cow Milk	1.0E-01	14.16%
Meat	4.3E-03	0.59%
Total	7.3E-01	100.0%

Radionuclide	Population Dose (person-rem) ^(a)	Percent of Total Dose ^(b)
Gases and Vapors		
Н-3	5.5E-01	75.1%
C-14	1.6E-04	0.02%
Kr-85	1.0E-01	14.31%
I-129	3.3E-02	4.53%
Particulates		
Am-241	9.9E-05	0.01%
Cs-137	2.7E-02	3.65%
Pu-238	1.3E-04	0.02%
Pu-239	4.0E-03	0.56%
Sr-90	7.6E-03	1.05%
U-234	1.7E-04	0.02%
U-238	4.0E-04	0.05%
Unidentified Alpha	3.6E-03	0.50%
Unidentified Beta	1.0E-03	0.14%
Total	7.3E-01	100.0%

NOTE: (a) Committed effective dose

NOTE: (b) Radionuclides contributing 0.01% or more of the total dose

Data Table A-23, Airborne Releases by Stack Height for NESHAP (Curies)						2 Pages	
Radionuclide	Total						
	0 m Stack	15 m Stack	21 m Stack	31 m Stack	56 m Stack	59 m Stack	All Stacks
			ASES AND V				
H-3 (oxide)	7.18E+01	5.32E+02	1.00E+01	2.39E+03	1.47E+03	2.16E+03	6.63E+03
H-3 (elemental)	- 107 . 01	1.60E+03	1.007.01	1.01E+02	1.175.00	1.89E+02	1.89E+03
H-3 Total	7.18E+01	2.13E+03	1.00E+01	2.49E+03	1.47E+03	2.35E+03	8.52E+03
C-14	3.52E-07					6.60E-02	6.60E-02
Hg-203	4.77E-10						4.77E-10
Kr-85						2.27E+04	2.27E+04
I-129	6.04E-05					7.64E-03	7.70E-03
I-131	5.52E-10						5.52E-10
			PARTICI	LES			
Am-241	4.20E-07	2.15E-09	1.30E-09			3.15E-06	3.58E-06
Am-243	4.33E-09						4.33E-09
Au-198	2.78E-08						2.78E-08
Ba-133	3.92E-09						3.92E-09
Cd-109	1.65E-08						1.65E-08
Ce-137	1.87E-05						1.87E-05
Ce-139	4.71E-10						4.71E-10
Cm-244	7.49E-08		2.99E-08			3.46E-08	1.39E-07
Co-57	4.51E-10						4.51E-10
Co-60	1.80E-07						1.80E-07
Cs-134	1.47E-09						1.47E-09
Cs-137	3.33E-03	1.14E-08		5.61E-04		1.47E-05	3.90E-03
Eu-152	2.86E-02						2.86E-02
Eu-154	7.66E-05						7.66E-05
Fe-55	6.76E-09						6.76E-09
K-40	7.08E-09						7.08E-09
Mn-54	4.51E-10						4.51E-10
Ni-63	3.20E-09						3.20E-09
Np-237	1.40E-08	1.75E-10	2.15E-10			3.08E-07	3.22E-07
Pa-234	2.65E-07						2.65E-07
Pb-212	8.43E-07						8.43E-07
Pu-236	1.21E-09						1.21E-09
Pu-238	1.19E-07	8.46E-08	2.45E-08	1.45E-10		2.81E-06	3.04E-06
Pu-239	4.16E-05		9.53E-09	3.68E-07		4.49E-05	8.69E-05
Pu-240	5.08E-07						5.08E-07
Pu-241	8.96E-06						8.96E-06
Pu-242	3.29E-09						3.29E-09
Ra-226	1.16E-08						1.16E-08
Ra-228	1.82E-09						1.82E-09
Rh-106(b)	4.31E-09						4.31E-09
Ru-106	4.31E-09						4.31E-09
Sb-125	2.11E-09						2.11E-09
Sn-113	6.27E-10						6.27E-10
Sr-85	6.02E-10						6.02E-10
Sr-89	1.12E-10						1.12E-10
Sr-90	2.52E-03	5.18E-06				5.03E-05	2.58E-03
Tc-99	3.75E-07	0.101 00					3.75E-07
Th-228	1.22E-11	1.82E-09					1.83E-09
Th-229	1.39E-09	1.021 07					1.39E-09
- 11 /	1.571 07						1.571 07

Data Table A-23. Airborne Releases by Stack Height for NESHAP

Data Table A-23, Airborne Releases by Stack Height for NESHAP (Curies)							
Radionuclide	Total	Total	Total	Total	Total	Total	Total
Kautoliuciluc	0 m Stack	15 m Stack	21 m Stack	31 m Stack	56 m Stack	59 m Stack	All Stacks
Th-230	8.40E-07	2.03E-09					8.42E-07
Th-232	2.20E-08	1.07E-09					2.31E-08
T1-208	1.41E-06						1.41E-06
U-232	2.80E-09						2.80E-09
U-233	2.36E-07						2.36E-07
U-234	1.96E-05	1.25E-09	2.70E-09	5.25E-08		1.73E-05	3.69E-05
U-235	4.76E-07	4.71E-09	1.31E-09			1.41E-06	1.90E-06
U-236	1.54E-07						1.54E-07
U-237	2.21E-10						2.21E-10
U-238	2.91E-05	6.87E-08		6.85E-08		2.34E-05	5.26E-05
Y-88	4.51E-10						4.51E-10
Y-90(b)	2.52E-03	5.18E-06				5.03E-05	2.58E-03
Zn-65	9.93E-10						9.93E-10
Unidentified alpha	6.64E-05	5.37E-06	8.35E-08	5.92E-06			7.78E-05
Unidentified beta	2.01E-04	1.06E-05	1.59E-06	3.11E-05		8.60E-05	3.30E-04

a. Calculated individual isotope annual releases below 1E-12 Ci (1 pCi) are not reported in this table and, therefore, not used in the dose calculations.

b. Daughter products (Sb-126, Rh-106 & Y-90) are assumed to be in secular equilibrium with their parent source terms (Sn-126, Ru-106 & Sr-90, respectively).

Data Table A-24. Site-Specific Parameters Used with CAP88 PC for NESHAP Data Table A-24, Site-Specific Parameters Used with CAP88 PC for NESHAP 2023 Parameters Used with CAP88 PC for NESHAP

Parameter	Value			
Particle size, AMAD ^a				
Gases and Vapors		0		
Particles		1		
Meteorological data	2	2014-2018; H Area		
Plume rise		None		
Number of stacks		6		
Stack heights, m	0, 15,	21, 31, 56, and 59		
Height of lid, m		1328		
Rainfall rate, cm/yr		126.28		
Average air temperature, C		18.5		
Absolute humidity, g/m ³		12.32		
State	S	outh Carolina		
MEI Specific Parameters				
Distance to MEI	12378 m in North Direction			
Food supply fractions:	Home Produced	From Assessment Area		
Vegetable	1.00	0.00		
Meat	1.00	0.00		
Milk	1.00	0.00		
EPA Food Source Scenario	Local			
TRL Worker MEI Specific Parameters				
Distance to MEI	9379 m in West Southwest Direction			
Food supply fractions:	Home Produced	From Assessment Area		
Vegetable	0.00	1.00		
Meat	0.00	1.00		
Milk	0.00	1.00		
EPA Food Source Scenario	Regional			
Population Specific Parameters				
Population size (around H-Area)	838,833			
Food supply fractions: ^b	Home Produced	From Assessment Area		
Vegetable	0.70	0.30		
Meat	0.44	0.56		
Milk	0.40	0.60		
EPA Food Source Scenario	Rural			

^aActivity Medium Aerodynamic Diameter, micrometers

^bCAP88-PC may recalculate the input food source fractions should the productivity of the local or assessment area be insufficient to produce enough food to meet the population times the consumption rates.

2023 CAP88 PC Dose Calculations for NESHAP Report to EPA						Pages		
Radionuclide				s (Curies)			Maximally Exposed Individual Dose	Fraction of Dose
	0 m	15m	21m	31m	56m	59m	(mrem)	
H-3 (oxide)	7.18E+01	5.32E+02	1.00E+01	2.39E+03	1.47E+03	2.16E+03	1.25E-02	0.48
I-129	6.04E-05					7.64E-03	8.63E-03	0.33
H-3		1.60E+03		1.01E+02		1.89E+02	3.55E-03	0.14
(elemental)								
Kr-85						2.27E+04	4.55E-04	0.02
Cs-137	3.33E-03	1.14E-08		5.61E-04		1.47E-05	3.02E-04	0.01
Ba-137m							2.85E-04	0.01
Sr-90	2.52E-03	5.18E-06				5.03E-05	2.71E-04	0.01
Unidentified Alpha	6.64E-05	5.37E-06	8.35E-08	5.92E-06			6.63E-05	0.003
Pu-239	4.16E-05		9.53E-09	3.68E-07		4.49E-05	6.57E-05	0.003
Unidentified	2.01E-04	1.06E-05	1.59E-06	3.11E-05		8.60E-05	3.88E-05	0.001
Beta								
Y-90	2.52E-03	5.18E-06				5.03E-05	3.70E-05	0.001
C-14	3.52E-07					6.60E-02	1.71E-05	0.001
Bi-214							1.30E-05	0.0005
Th-230	8.40E-07	2.03E-09					8.87E-06	0.0003
Ra-226	1.16E-08						7.23E-06	0.0003
U-238	2.91E-05	6.87E-08		6.85E-08		2.34E-05	2.28E-06	0.0001
Pb-214							2.23E-06	0.0001
Am-241	4.20E-07	2.15E-09	1.30E-09			3.15E-06	2.05E-06	0.0001
U-234	1.96E-05	1.25E-09	2.70E-09	5.25E-08		1.73E-05	1.90E-06	0.0001
Pu-238	1.19E-07	8.46E-08	2.45E-08	1.45E-10		2.81E-06	1.90E-06	0.00007
Pa-234m							1.43E-06	0.00005
Pu-240	5.08E-07						4.33E-07	0.00002
Th-229	1.39E-09						2.96E-07	0.00001
Bi-210							1.77E-07	0.00001
U-235	4.76E-07	4.71E-09	1.31E-09			1.41E-06	1.49E-07	0.00001
Pu-241	8.96E-06						1.39E-07	0.00001
Th-234							1.24E-07	0.00000
Np-237	1.40E-08	1.75E-10	2.15E-10			3.08E-07	1.04E-07	0.000004
Cm-244	7.49E-08		2.99E-08			3.46E-08	5.82E-08	0.000002
Pa-234	2.65E-07						2.83E-08	0.000001
Ac-225							2.24E-08	0.000001
Ra-225							2.05E-08	0.000001
Co-60	1.80E-07						1.73E-08	0.000001
Pa-233							1.52E-08	0.000001
U-233	2.36E-07						1.37E-08	0.000001
Pb-210							1.10E-08	0.000000
Th-232	2.20E-08	1.07E-09					1.04E-08	0.000000
Bi-213							9.86E-09	0.000000
Tc-99	3.75E-07						8.28E-09	0.000000
U-236	1.54E-07						8.01E-09	0.000000
Th-231							6.83E-09	0.000000
T1-208	1.41E-06						6.51E-09	0.000000
Ra-228	1.82E-09						6.30E-09	0.000000
Tl-210	IIIIIII O						5.09E-09	0.0000002
Ac-228							4.95E-09	0.0000002
Rn-222							3.42E-09	0.0000002
Am-243	4.33E-09						3.07E-09	0.0000001
Th-228	1.22E-11	1.82E-09					2.68E-09	0.0000001
Pu-242	3.29E-09	1.021-07					2.66E-09	0.0000001
T1-209	5.271-07						2.52E-09	0.0000001

Data Table A-25a. Radioactive Atmospheric Releases and MEI Doses for Site Boundary MEI Data Table A-25a Radioactive Atmospheric Releases and MEI Doses for Site Boundary MEI 2023 CAP88 PC Dose Calculations for NESHAP Report to EPA 3 Pages

2023 CAP88 PC Dose Calculations for NESHAP Report to EPA					3 Pages			
							Maximally	
Radionuclide			Releases	s (Curies)			Exposed	
				(======)			Individual Dose	Fraction of Dose
	0 m	15m	21m	31m	56m	59m	(mrem)	
Fr-221	U III	15111	21111	51111	30111	3711	1.61E-09	0.0000001
Bi-212							1.25E-09	0.0000000
Pb-212	8.43E-07						1.01E-09	0.0000000
K-40	7.08E-09						8.02E-10	0.0000000
Eu-152	8.61E-09						7.77E-10	0.0000000
Po-214	0.012 09						7.23E-10	0.0000000
U-232	2.80E-09						5.22E-10	0.0000000
Pu-236	1.21E-09						3.93E-10	0.0000000
Ra-224							2.26E-10	0.00000001
Pb-209							1.91E-10	0.00000001
Np-239							1.76E-10	0.00000001
Cs-134	1.47E-09						1.02E-10	0.00000000
Ba-133	3.92E-09						1.01E-10	0.00000000
Eu-154	9.53E-10						6.58E-11	0.00000000
Po-210							4.60E-11	0.00000000
Ra-223							2.03E-11	0.00000000
Sb-125	2.11E-09						1.94E-11	0.00000000
Th-227							1.81E-11	0.00000000
Pb-211							1.72E-11	0.00000000
Cd-109	1.65E-08						1.63E-11	0.00000000
Zn-65	9.93E-10						1.50E-11	0.00000000
At-217							1.36E-11	0.00000000
Rh-106	4.31E-09						1.25E-11	0.00000000
Pa-231							1.13E-11	0.000000000
Tl-207							8.92E-12	0.000000000
Ce-137	1.87E-05						8.84E-12	0.000000000
Rn-219							8.77E-12	0.000000000
Ru-106	4.31E-09						8.73E-12	0.000000000
Bi-211							7.10E-12	0.000000000
Rn-220							3.67E-12	0.000000000
Y-88	4.51E-10						2.79E-12	0.000000000
Fe-55	6.76E-09						2.61E-12	0.000000000
Mn-54	4.51E-10						2.60E-12	0.000000000
U-237	2.21E-10						2.31E-12	0.000000000
Po-213							2.09E-12	0.000000000
Ni-63	3.20E-09						1.21E-12	0.000000000
Au-198	2.78E-08						1.06E-12	0.000000000
Te-125m	(0 0 E 10						8.23E-13	0.000000000
Sr-85	6.02E-10						5.24E-13	0.000000000
T1-206	4.515.10						4.15E-13	0.000000000
Co-57	4.51E-10						4.10E-13	0.000000000
In-113m	4.715.10						4.06E-13	0.000000000
Ce-139	4.71E-10						2.41E-13	0.000000000
At-218	(27E 10						2.29E-13	0.000000000
Sn-113	6.27E-10						2.25E-13	0.000000000
I-131 Fr-223	5.52E-10						2.17E-13 1.71E-13	0.0000000000000000000000000000000000000
Pr-223 Po-216							1./1E-13 8.85E-14	0.0000000000000000000000000000000000000
P0-216 Sr-89	1.12E-10						8.85E-14 8.81E-14	0.0000000000000000000000000000000000000
Hg-203	4.77E-10						6.69E-14	0.0000000000000000000000000000000000000
Po-218	4.//E-10						6.10E-14	0.0000000000000000000000000000000000000
Ac-227							3.79E-14	0.0000000000000000000000000000000000000
Po-215							2.68E-14	0.0000000000000000000000000000000000000
Hg-206							1.43E-14	<0.000000000000000000000000000000000000
$H_{0} = 206$								

Data Table A-25a Radioactive Atmospheric Releases and MEI Doses for Site Boundary MEI2023 CAP88 PC Dose Calculations for NESHAP Report to EPA3 Pages

Data Table A-25a Radioactive Atmospheric Releases and MEI Doses for Site Boundary MEI2023 CAP88 PC Dose Calculations for NESHAP Report to EPA3 Pages

2	2025 CAP86 PC Dose Calculations for NESHAP Report to EPA			5 rages				
Radionuclide		Releases (Curies)						Fraction of Dose
	0 m	15m	21m	31m	56m	59m	(mrem)	
La-137	ĺ						1.62E-15	< 0.00000000001
Rn-218							1.33E-15	< 0.00000000001
U-235m							7.44E-16	< 0.00000000001
Bi-215							3.95E-17	< 0.00000000001
Xe-131m							6.27E-22	< 0.00000000001
Gd-152							2.30E-28	< 0.00000000001
At-219							0.00E+00	< 0.00000000001
Nd-144							0.00E+00	< 0.00000000001
Po-212							0.00E+00	< 0.00000000001
Sm-148							0.00E+00	< 0.00000000001
Grand Total	7.18E+01	2.13E+03	1.00E+01	2.49E+03	1.47E+03	2.51E+04	2.63E-02	

Data Table A-25b. Radioactive Atmospheric Releases and MEI Doses at TRL Worker MEI Location

2	2023 CAP88	PC Dose Ca	lculations fo	r NESHAP I	Report to EP	PA		Pages
Radionuclide			Release	s (Curies)			Maximally Exposed Individual Dose	Fraction of Dose
	0 m	15m	21m	31m	56m	59m	(mrem)	
H-3 (oxide)	7.18E+01	5.32E+02	1.00E+01	2.39E+03	1.47E+03	2.16E+03	1.27E-02	0.46
I-129	6.04E-05					7.64E-03	9.61E-03	0.35
H-3		1.60E+03		1.01E+02		1.89E+02	3.58E-03	0.13
(elemental)								
Kr-85						2.27E+04	5.46E-04	0.02
Ba-137m							3.43E-04	0.01
Cs-137	3.33E-03	1.14E-08		5.61E-04		1.47E-05	3.19E-04	0.01
Sr-90	2.52E-03	5.18E-06				5.03E-05	2.86E-04	0.01
Pu-239	4.16E-05		9.53E-09	3.68E-07		4.49E-05	7.44E-05	0.003
Unidentified	6.64E-05	5.37E-06	8.35E-08	5.92E-06			7.16E-05	0.003
Alpha								
Y-90	2.52E-03	5.18E-06				5.03E-05	4.46E-05	0.002
Unidentified	2.01E-04	1.06E-05	1.59E-06	3.11E-05		8.60E-05	4.16E-05	0.002
Beta								
C-14	3.52E-07					6.60E-02	1.68E-05	0.001
Bi-214							1.61E-05	0.0006
Th-230	8.40E-07	2.03E-09					9.91E-06	0.0004
Ra-226	1.16E-08						7.73E-06	0.0003
Pb-214							2.75E-06	0.0001
U-238	2.91E-05	6.87E-08		6.85E-08		2.34E-05	2.54E-06	0.0001
Am-241	4.20E-07	2.15E-09	1.30E-09			3.15E-06	2.42E-06	0.0001
Pu-238	1.19E-07	8.46E-08	2.45E-08	1.45E-10		2.81E-06	2.25E-06	0.0001
U-234	1.96E-05	1.25E-09	2.70E-09	5.25E-08		1.73E-05	2.11E-06	0.0001
Pa-234m							1.76E-06	0.00006
Pu-240	5.08E-07						4.67E-07	0.00002
Th-229	1.39E-09						3.19E-07	0.00001
Bi-210							2.19E-07	0.00001
U-235	4.76E-07	4.71E-09	1.31E-09			1.41E-06	1.77E-07	0.00001
Th-234							1.50E-07	0.00001
Pu-241	8.96E-06						1.50E-07	0.00001
Np-237	1.40E-08	1.75E-10	2.15E-10			3.08E-07	1.23E-07	0.000004
Cm-244	7.49E-08		2.99E-08			3.46E-08	6.42E-08	0.000002
Pa-234	2.65E-07		2.552.00			5.101 00	3.48E-08	0.000001
Ac-225	2.051 07						2.42E-08	0.000001
Ra-225							2.21E-08	0.000001
Co-60	1.80E-07						2.06E-08	0.000001
Pa-233	1.00L-07						1.92E-08	0.000001
U-233	2.36E-07						1.47E-08	0.000001
Pb-210	2.501-07						1.35E-08	0.000000
Bi-213							1.19E-08	0.000000
Th-232	2.20E-08	1.07E-09					1.19E-08 1.12E-08	0.000000
Trc-99	2.20E-08 3.75E-07	1.07E-09					1.12E-08 8.76E-09	0.000000
U-236	1.54E-07						8.61E-09	0.000000
U-236 Th-231	1.34E-07						8.61E-09 8.53E-09	0.000000
TI-208	1.41E-06						8.53E-09 7.83E-09	0.000000
	1.41E-06 1.82E-09							0.000000
Ra-228	1.62E-09						6.68E-09	
TI-210							6.26E-09	0.000002
Ac-228							5.96E-09	0.000002
Rn-222	4 225 00						4.21E-09	0.000002
Am-243	4.33E-09						3.31E-09	0.0000001

Data Table A-25b Radioactive Atmospheric Releases and MEI Doses at TRL Worker MEI Location

Location 2	2023 CAP88 PC Dose Calculations for NESHAP Report to EPA		Pages
Radionuclide	Releases (Curies)	Maximally Exposed Individual Dose	Fraction of Dose
	0 m 15m 21m 31m 56m 59m	(mrem)	
Th-228	1.22E-11 1.82E-09	2.88E-09	0.0000001
Pu-242	3.29E-09	2.87E-09	0.0000001
Fr-221		1.94E-09	0.0000001
Bi-212		1.46E-09	0.0000001
Pb-212	8.43E-07	1.19E-09	0.0000000
Eu-152	8.61E-09	9.34E-10	0.0000000
K-40	7.08E-09	9.01E-10	0.0000000
Po-214		8.89E-10	0.0000000
U-232	2.80E-09	5.59E-10	0.0000000
Pu-236	1.21E-09	4.24E-10	0.0000000
Ra-224		2.52E-10	0.0000001
Pb-209		2.29E-10	0.00000001
Np-239		2.12E-10	0.0000001
Ba-133	3.92E-09	1.21E-10	0.00000000
Cs-134	1.47E-09	1.13E-10	0.00000000
Eu-154	9.53E-10	7.91E-11	0.00000000
Po-210		5.66E-11	0.00000000
Ra-223		2.53E-11	0.00000000
Sb-125	2.11E-09	2.33E-11	0.00000000
Th-227		2.26E-11	0.00000000
Pb-211		2.15E-11	0.00000000
Cd-109	1.65E-08	1.76E-11	0.00000000
At-217		1.64E-11	0.00000000
Zn-65	9.93E-10	1.63E-11	0.00000000
Rh-106	4.31E-09	1.50E-11	0.00000000
Pa-231		1.41E-11	0.00000000
Tl-207		1.11E-11	0.00000000
Rn-219		1.10E-11	0.000000000
Ce-137	1.87E-05	1.02E-11	0.000000000
Ru-106	4.31E-09	9.28E-12	0.000000000
Bi-211		8.87E-12	0.000000000
Rn-220		4.42E-12	0.000000000
Y-88	4.51E-10	3.34E-12	0.000000000
Mn-54	4.51E-10	3.11E-12	0.000000000
U-237	2.21E-10	2.78E-12	0.000000000
Fe-55	6.76E-09	2.76E-12	0.000000000
Po-213		2.51E-12	0.000000000
Ni-63	3.20E-09	1.28E-12	0.0000000000
Au-198	2.78E-08	1.23E-12	0.0000000000
Te-125m		9.24E-13	0.0000000000
Sr-85	6.02E-10	6.16E-13	0.0000000000
T1-206		5.11E-13	0.0000000000
In-113m		4.89E-13	0.0000000000
Co-57	4.51E-10	4.78E-13	0.0000000000
Ce-139	4.71E-10	2.86E-13	0.0000000000
At-218		2.82E-13	0.0000000000
Sn-113	6.27E-10	2.43E-13	0.0000000000
I-131	5.52E-10	2.28E-13	0.0000000000
Fr-223		2.13E-13	0.00000000001
Po-216		1.07E-13	0.00000000000
Sr-89	1.12E-10	9.47E-14	0.00000000000
Po-218		7.52E-14	0.00000000000
Hg-203	4.77E-10	7.04E-14	0.00000000000
Ac-227		4.74E-14	0.00000000000

Data Table A-25b Radioactive Atmospheric Releases and MEI Doses at TRL Worker MEI Location

2	2023 CAP88 PC Dose Calculations for NESHAP Report to EPA					3	Pages	
Radionuclide		Releases (Curies)					Maximally Exposed Individual Dose	Fraction of Dose
	0 m	15m	21m	31m	56m	59m	(mrem)	
Po-215							3.35E-14	0.00000000000
Hg-206							1.76E-14	< 0.00000000001
Po-211							4.27E-15	< 0.00000000001
La-137							1.95E-15	< 0.00000000001
Rn-218							1.64E-15	< 0.00000000001
U-235m							8.46E-16	< 0.00000000001
Bi-215							4.93E-17	< 0.00000000001
Xe-131m							5.87E-22	< 0.00000000001
Gd-152							2.21E-28	< 0.00000000001
At-219							0.00E+00	< 0.00000000001
Nd-144							0.00E+00	< 0.00000000001
Po-212							0.00E+00	< 0.000000000001
Sm-148							0.00E+00	< 0.00000000001
Grand Total	7.18E+01	2.13E+03	1.00E+01	2.49E+03	1.47E+03	2.51E+04	2.77E-02	

Data Table A-25b Radioactive Atmospheric Releases and MEI Doses at TRL Worker MEI Location

Data Table A-26a. Diffuse and Fugitive Releases and MEI Doses for NESHAP at Site Boundary MEI

	Maximally Exposed	undary MEI	
Releases (curies)		Fraction of Dose	
3.33E-03		0.44	
		0.23	
		0.15	
		0.05	
		0.03	
		0.03	
		0.02	
		0.02	
		0.02	
		0.00	
		0.004	
		0.004	
		0.001	
		0.001	
		0.001	
		0.0004	
		0.0003	
		0.0003	
		0.0001	
		0.0001	
		0.0001	
		0.0001	
		0.0000	
		0.0000	
		0.0000	
		0.0000	
		0.00002	
		0.00001	
2.36E-07	1.37E-08	0.00001	
2.20E-08	9.92E-09	0.00001	
0.00E+00	9.86E-09	0.00001	
3.75E-07	8.28E-09	0.00001	
1.54E-07	8.01E-09	0.00001	
1.41E-06	6.20E-09	0.00001	
0.00E+00	6.17E-09	0.00001	
1.82E-09	6.02E-09	0.00001	
		0.00000	
		0.00000	
		0.00000	
		0.00000	
		0.00000	
		0.00000	
		0.000002	
		0.000002	
		0.000002	
		0.000001	
0.00E+00	1.20E-09	0.000001	
	1.201.707	0.000001	
	0.00E+00 3.75E-07 1.54E-07 1.41E-06 0.00E+00 1.82E-09 1.40E-08 0.00E+00 4.33E-09 0.00E+00 3.29E-09 0.00E+00 0.00E+00 0.00E+00 1.22E-11 0.00E+00	3.33E-03 $5.00E-04$ $2.52E-03$ $2.65E-04$ $7.18E+01$ $1.69E-04$ $6.64E-05$ $5.66E-05$ $2.52E-03$ $3.63E-05$ $4.16E-05$ $3.55E-05$ $6.04E-05$ $2.53E-05$ $2.01E-04$ $2.40E-05$ $0.00E+00$ $7.32E-06$ $8.40E-07$ $5.29E-06$ $1.16E-08$ $4.12E-06$ $2.91E-05$ $1.38E-06$ $0.00E+00$ $1.25E-06$ $1.96E-05$ $1.11E-06$ $0.00E+00$ $8.21E-07$ $5.08E-07$ $4.33E-07$ $4.20E-07$ $2.99E-07$ $1.39E-09$ $2.96E-07$ $8.96E-06$ $1.39E-07$ $0.00E+00$ $9.97E-08$ $1.19E-07$ $9.31E-08$ $0.00E+00$ $2.24E-08$ $0.00E+00$ $2.05E-08$ $1.80E-07$ $1.73E-08$ $2.20E-08$ $9.92E-09$ $0.00E+00$ $9.86E-09$ $3.75E-07$ $8.28E-09$ $1.54E-07$ $8.01E-09$ $1.41E-06$ $6.20E-09$ $0.00E+00$ $4.71E-09$ $1.82E-09$ $6.02E-09$ $0.00E+00$ $4.71E-09$ $1.42E-08$ $5.63E-09$ $0.00E+00$ $4.71E-09$ $1.42E-09$ $6.02E-09$ $0.00E+00$ $4.71E-09$ $1.82E-09$ $6.02E-09$ $0.00E+00$ $4.71E-09$ $1.22E-11$ $1.62E-08$ $0.00E+00$ $1.83E-09$ $0.00E+00$ $1.83E-09$ $0.00E+00$ $1.82E-09$ $0.00E+00$ $1.61E-09$	

Data Table A-26a, Diffuse and Fugitive Releases and MEI Doses for NESHAP
2023 Diffuse and Fugitive Releases^(a) and MEI Doses at Site Boundary MEI3 Pages

2023 Diffuse and Fugitive Releases ^(a) and MEI Doses at Site Boundary MEI Maximally Exposed						
Radionuclide	Releases (curies)	Individual Dose	Fraction of Dose			
Nautonuchue	Releases (curies)	(mrem)	Fraction of Dose			
K-40	7.08E-09	8.02E-10	0.000001			
Eu-152			0.000001			
	8.61E-09	7.77E-10				
Pa-233	0.00E+00	7.15E-10	0.000001			
U-232	2.80E-09	5.22E-10	0.000000			
Po-214	0.00E+00	4.06E-10	0.000000			
Pu-236	1.21E-09	3.93E-10	0.000000			
Pb-209	0.00E+00	1.91E-10	0.000000			
Np-239	0.00E+00	1.76E-10	0.000000			
Ra-224	0.00E+00	1.57E-10	0.000000			
C-14	3.52E-07	1.30E-10	0.0000001			
Cs-134	1.47E-09	1.02E-10	0.0000001			
Ba-133	3.92E-09	1.01E-10	0.0000001			
Eu-154	9.53E-10	6.58E-11	0.0000001			
Po-210	0.00E+00	2.58E-11	0.0000000			
Sb-125	2.11E-09	1.94E-11	0.0000000			
Cd-109	1.65E-08	1.63E-11	0.0000000			
Zn-65	9.93E-10	1.50E-11	0.0000000			
At-217	0.00E+00	1.36E-11	0.0000000			
Rh-106	4.31E-09	1.25E-11	0.0000000			
Ce-137	1.87E-05	8.8E-12	0.0000000			
Ru-106	4.31E-09	8.7E-12	0.0000000			
Ra-223	0.00E+00	5.4E-12	0.0000000			
Th-227	0.00E+00	4.8E-12	0.0000000			
Pb-211	0.00E+00	4.6E-12	0.0000000			
Rn-220	0.00E+00	3.5E-12	0.0000000			
Pa-231	0.00E+00	3.0E-12	0.0000000			
Y-88	4.51E-10	2.8E-12	0.0000000			
Fe-55	6.76E-09	2.6E-12	0.0000000			
Mn-54	4.51E-10	2.60E-12	0.0000000			
T1-207	0.00E+00	2.38E-12	0.00000000			
Rn-219	0.00E+00	2.34E-12	0.00000000			
U-237	2.21E-10	2.31E-12 2.31E-12	0.00000000			
Po-213	0.00E+00	2.09E-12	0.00000000			
Bi-211	0.00E+00	1.9E-12	0.00000000			
Ni-63	3.20E-09	1.2E-12	0.00000000			
Au-198	2.78E-08	1.1E-12	0.00000000			
Te-125m	0.00E+00	8.23E-13	0.000000001			
Sr-85	6.02E-10	5.24E-13	0.00000000			
Co-57	4.51E-10	4.10E-13	0.00000000			
In-113m	0.00E+00	4.06E-13	0.00000000			
Ce-139	4.71E-10	2.41E-13	0.00000000			
TI-206	0.00E+00	2.3E-13	0.00000000			
Sn-113	6.27E-10	2.3E-13	0.00000000			
I-131	5.52E-10	2.2E-13	0.00000000			
At-218	0.00E+00	1.28E-13	0.00000000			
Sr-89	1.12E-10	8.81E-14	0.00000000			
Po-216	0.00E+00	8.44E-14	0.000000001			
Hg-203	4.77E-10	6.69E-14	0.000000001			
Fr-223	0.00E+00	4.56E-14	0.000000000			
Po-218	0.00E+00	3.42E-14	0.000000000			
Ac-227	0.00E+00	1.01E-14	0.000000000			

Data Table A-26a, Diffuse and Fugitive Releases and MEI Doses for NESHAP 3 Pages 2023 Diffuse and Fugitive Releases^(a) and MEI Doses at Site Boundary MEI

2023 1	Jinuse and Fugitive Releases	and WIET Doses at Site Do	unuary MIEI
Radionuclide	Releases (curies)	Maximally Exposed Individual Dose (mrem)	Fraction of Dose
Hg-206	0.00E+00	8.04E-15	0.000000000
Po-215	0.00E+00	7.16E-15	0.000000000
La-137	0.00E+00	1.62E-15	0.000000000
Po-211	0.00E+00	9.13E-16	<0.00000000001
Rn-218	0.00E+00	7.46E-16	< 0.000000000001
U-235m	0.00E+00	4.04E-16	<0.00000000001
Bi-215	0.00E+00	1.05E-17	< 0.00000000001
Xe-131m	0.00E+00	6.27E-22	< 0.00000000001
Gd-152	0.00E+00	2.30E-28	<0.00000000001
At-219	0.00E+00	0.00E+00	<0.00000000001
Nd-144	0.00E+00	0.00E+00	< 0.000000000001
Po-212	0.00E+00	0.00E+00	<0.00000000001
Sm-148	0.00E+00	0.00E+00	< 0.00000000001
Grand Total	7.18E+01	1.13E-03	

Data Table A-26a, Diffuse and Fugitive Releases and MEI Doses for NESHAP3 Pages2023 Diffuse and Fugitive Releases^(a) and MEI Doses at Site Boundary MEI3

a. Beginning in 2016, calculated individual isotope annual releases below 1E-12 Ci (1 pCi) are no longer reported in this table and, therefore, not used in the dose calculations.

b. Daughter products (Sb-126 & Y-90) in secular equilibrium with source terms (Sn-126 & Sr-90, respectively). In CAP88, they are included in their parents' source term and are not run separately.

c. Radionuclides with no release values are daughter products with no original source term of their own.

Data Table A-26b. Diffuse and Fugitive Releases and MEI Doses for NESHAP at TRL Worker Location

2025 DI	ruse and Fugitive Releases	wand MEI Doses I RL wor	
Radionuclide	Releases (curies)	Maximally Exposed Individual Dose	Fraction of Dose
Kaulonuchuc	Keleases (curles)	(mrem)	Fraction of Dose
Cs-137	3.33E-03	5.00E-04	0.44
Sr-90	2.52E-03		0.23
		2.65E-04	
H-3 (oxide)	7.18E+01	1.69E-04	0.15
Unidentified Alpha	6.64E-05	5.66E-05	0.05
Y-90	2.52E-03	3.63E-05	0.03
Pu-239	4.16E-05	3.55E-05	0.03
I-129	6.04E-05	2.53E-05	0.02
Unidentified Beta	2.01E-04	2.40E-05	0.02
Bi-214	0.00E+00	7.32E-06	0.01
Th-230	8.40E-07	5.29E-06	0.005
Ra-226	1.16E-08	4.12E-06	0.004
Pb-214	2.91E-05	1.38E-06	0.001
U-238	0.00E+00	1.25E-06	0.001
U-234	1.96E-05	1.11E-06	0.001
Pa-234m	0.00E+00	8.21E-07	0.001
Pu-240	5.08E-07	4.33E-07	0.0004
Am-241	4.20E-07	2.99E-07	0.0003
Th-229	1.39E-09	2.96E-07	0.0003
Pu-241	8.96E-06	1.39E-07	0.0001
Bi-210	0.00E+00	9.97E-08	0.0001
Pu-238	1.19E-07	9.31E-08	0.0001
Th-234	0.00E+00	7.14E-08	0.0001
U-235	4.76E-07	4.20E-08	0.0000
Cm-244	7.49E-08	3.30E-08	0.0000
Ac-225	0.00E+00	2.24E-08	0.0000
Ra-225	0.00E+00	2.05E-08	0.0000
Co-60	1.80E-07	1.73E-08	0.00002
Pa-234	2.65E-07	1.62E-08	0.00001
U-233	2.36E-07	1.37E-08	0.00001
Bi-213	2.20E-08	9.92E-09	0.00001
Th-232	0.00E+00	9.86E-09	0.00001
Tc-99	3.75E-07	8.28E-09	0.00001
U-236	1.54E-07	8.01E-09	0.00001
T1-208	1.41E-06	6.20E-09	0.00001
Pb-210	0.00E+00	6.17E-09	0.00001
	1.82E-09		
Ra-228		6.02E-09	0.00001
Np-237	1.40E-08	5.63E-09	0.00000
Ac-228	0.00E+00	4.71E-09	0.00000
TI-210	4.33E-09	3.07E-09	0.00000
Am-243	0.00E+00	2.86E-09	0.00000
T1-209	3.29E-09	2.66E-09	0.00000
Pu-242	0.00E+00	2.52E-09	0.00000
Rn-222	0.00E+00	1.92E-09	0.000002
Th-231	0.00E+00	1.83E-09	0.000002
Fr-221	1.22E-11	1.62E-09	0.000001
Th-228	0.00E+00	1.61E-09	0.000001
Bi-212	0.00E+00	1.20E-09	0.000001
Pb-212	8.43E-07	9.72E-10	0.000001

Data Table A-26b, Diffuse and Fugitive Releases and MEI Doses for NESHAP
2023 Diffuse and Fugitive Releases^(a) and MEI Doses TRL Worker Location3 Pages

2023 1	Diffuse and Fugitive Releases	Maximally Exposed		
Radionuclide	Releases (curies)	Individual Dose	Fraction of Dose	
Nautonuciuc	Releases (curres)	(mrem)	Fraction of Dose	
Eu-152	7.08E-09	8.02E-10	0.000001	
K-40	8.61E-09	7.77E-10	0.000001	
Pa-233	0.00E+00	7.15E-10	0.000001	
U-232	2.80E-09	5.22E-10	0.000001	
Po-214	0.00E+00	4.06E-10	0.000000	
Pu-236	1.21E-09	3.93E-10	0.000000	
Pb-209	0.00E+00	1.91E-10	0.000000	
Np-239	0.00E+00 0.00E+00	1.76E-10	0.000000	
Ra-224	0.00E+00	1.57E-10	0.000000	
C-14	3.52E-07	1.30E-10	0.0000001	
Ba-133	1.47E-09	1.02E-10	0.0000001	
Cs-134	3.92E-09	1.01E-10	0.0000001	
Eu-154	9.53E-10	6.58E-11	0.0000001	
Po-210	0.00E+00	2.58E-11	0.0000000	
Sb-125	2.11E-09	1.94E-11	0.0000000	
Cd-109	1.65E-08	1.63E-11	0.0000000	
At-217	9.93E-10	1.50E-11	0.0000000	
Zn-65	0.00E+00	1.36E-11	0.0000000	
Rh-106	4.31E-09	1.25E-11	0.0000000	
Ce-137	1.87E-05	8.8E-12	0.0000000	
Ru-106	4.31E-09	8.7E-12	0.0000000	
Ra-223	0.00E+00	5.4E-12	0.0000000	
Th-227	0.00E+00	4.8E-12	0.0000000	
Pb-211	0.00E+00	4.6E-12	0.0000000	
Rn-220	0.00E+00	3.5E-12	0.000000	
Pa-231	0.00E+00	3.0E-12	0.0000000	
Y-88	4.51E-10	2.8E-12	0.0000000	
Mn-54	6.76E-09	2.6E-12	0.00000000	
T1-207	4.51E-10	2.60E-12	0.00000000	
Rn-219	0.00E+00	2.38E-12	0.00000000	
U-237	0.00E+00	2.34E-12	0.00000000	
Fe-55	2.21E-10	2.31E-12	0.00000000	
Po-213	0.00E+00	2.09E-12	0.00000000	
Bi-211	0.00E+00	1.9E-12	0.00000002	
Ni-63	3.20E-09	1.2E-12	0.00000001	
Au-198	2.78E-08	1.1E-12	0.00000001	
Te-125m	0.00E+00	8.23E-13	0.00000001	
Sr-85	6.02E-10	5.24E-13	0.000000000	
In-113m	4.51E-10	4.10E-13	0.00000000	
Co-57	0.00E+00	4.06E-13	0.00000000	
Ce-139	4.71E-10	2.41E-13	0.00000000	
T1-206	0.00E+00	2.3E-13	0.00000000	
Sn-113	6.27E-10	2.3E-13	0.00000000	
I-131	5.52E-10	2.2E-13	0.00000000	
At-218	0.00E+00	1.28E-13	0.00000000	
Po-216	1.12E-10	8.81E-14	0.00000000	
Sr-89	0.00E+00	8.44E-14	0.000000001	
Hg-203	4.77E-10	6.69E-14	0.000000001	
Fr-223	0.00E+00	4.56E-14	0.000000000	
Po-218	0.00E+00	3.42E-14	0.000000000	
Ac-227	0.00E+00	1.01E-14	0.000000000	
			0.0000000000000000000000000000000000000	

Data Table A-26b, Diffuse and Fugitive Releases and MEI Doses for NESHAP3 Pages2023 Diffuse and Fugitive Releases^(a) and MEI Doses TRL Worker Location3

Radionuclide	Releases (curies)	Maximally Exposed Individual Dose (mrem)	Fraction of Dose
Hg-206	0.00E+00	8.04E-15	0.000000000
Po-215	0.00E+00	7.16E-15	0.000000000
La-137	0.00E+00	1.62E-15	0.000000000
Po-211	0.00E+00	9.13E-16	< 0.00000000001
Rn-218	0.00E+00	7.46E-16	<0.00000000001
U-235m	0.00E+00	4.04E-16	< 0.00000000001
Bi-215	0.00E+00	1.05E-17	< 0.00000000001
Xe-131m	0.00E+00	6.27E-22	< 0.00000000001
Gd-152	0.00E+00	2.30E-28	<0.00000000001
At-219	0.00E+00	0.00E+00	< 0.00000000001
Nd-144	0.00E+00	0.00E+00	< 0.00000000001
Po-212	0.00E+00	0.00E+00	<0.00000000001
Sm-148	0.00E+00	0.00E+00	< 0.00000000001
Grand Total	7.18E+01	1.13E-03	

Data Table A-26b, Diffuse and Fugitive Releases and MEI Doses for NESHAP3 Pages2023 Diffuse and Fugitive Releases^(a) and MEI Doses TRL Worker Location3

a. Beginning in 2016, calculated individual isotope annual releases below 1E-12 Ci (1 pCi) are no longer reported in this table and, therefore, not used in the dose calculations.

b. Daughter products (Sb-126 & Y-90) in secular equilibrium with source terms (Sn-126 & Sr-90, respectively). In CAP88, they are included in their parents' source term and are not run separately.

c. Radionuclides with no release values are daughter products with no original source term of their own.

Data Table A-27. CAP88 Offsite MEI Dose Compared to MAXDOSE-SR

Data Table A-27, CAP88 Offsite MEI Dose Compared to MAXDOSE-SR 2023 Maximally Exposed Individual Dose Commitment at Site Boundary from Atmospheric Releases

Pathway	CAP88 PC Maxim	ally Exposed Individual	MAXDOSE-SR Representative Person		
1 atliway	(Millirem) ^(a)	(Percent of Dose)	(Millirem) ^(a)	(Percent of Dose) ^(d)	
Plume	4.6E-04	1.73%	1.2E-03	7.65%	
Ground	5.1E-04	1.96%	3.8E-04	2.33%	
Inhalation	2.1E-03	7.90%	5.1E-03	31.48%	
Food ^(b)	2.3E-02	88.42%	9.5E-03	58.54%	
Total	2.6E-02	100.0%	1.6E-02	100.0%	

Radionuclide	CAP88 PC Maxim	ally Exposed Individual	MAXDOSE-SR I	Representative Person
Kaulonuchuc	(Millirem) ^(a)	(Percent of Dose)	(Millirem) ^(a)	(Percent of Dose) ^(d)
Gases and Vapors				
H-3 ^(c)	1.6E-02	61.12%	1.2E-02	72.22%
C-14	1.7E-05	0.07%	1.4E-05	0.09%
Kr-85	4.6E-04	1.73%	1.2E-03	7.65%
I-129	8.6E-03	32.86%	2.5E-03	15.56%
Particulates				
Cs-137	5.9E-04	2.24%	3.4E-04	2.09%
Pu-238	1.9E-06	1.09%	1.8E-06	0.01%
Pu-239	6.6E-05	0.25%	6.4E-05	0.39%
Sr-90	2.7E-04	1.03%	2.2E-04	1.36%
U-234	1.9E-06	0.01%	3.4E-06	0.02%
U-238	2.3E-06	0.01%	6.1E-06	0.04%
Unidentified Alpha	6.6E-05	0.25%	6.1E-05	0.38%
Unidentified Beta	3.9E-05	0.15%	2.7E-05	0.16%
Total	2.6E-02	100.0%	1.6E-02	100.0%

NOTE: (a) Committed effective dose.

NOTE: (b) Meat, milk, and vegetables.

NOTE: (c) Dose from tritium in foods calculated with absolute humidity of 12.9 g water/cubic meter of air.

NOTE: (d) Radionuclides contributing 0.01% or more from MAXDOSE-SR output.

Data Table A-28. CAP88 PC Population Dose Compared to POPDOSE-SR

Data Table A-28, CAP88 PC Population Dose Compared to POPDOSE-SR 2023 Collective Committed Dose from Atmospheric Releases

Dedlemen	CAI	P88 Code	88 Code POPDOSE	
Pathway	(Millirem) ^(a)	(Percent of Dose)	(Millirem) ^(a)	(Percent of Dose) ^(d)
Plume	6.02E-02	2.76%	1.04E-01	14.30%
Ground	5.00E-02	2.29%	3.47E-02	4.77%
Inhalation	2.65E-01	12.12%	4.62E-01	63.53%
Food ^(b)	1.81E+00	82.83%	1.26E-01	17.39%
Total	2.18E+00	100.00%	7.27E-01	100.00%

Radionuclide	CA	P88 Code	POPDO	SE-SR Code
Kaulonuchuc	(Millirem) ^(a)	(Percent of Dose)	(Millirem) ^(a)	(Percent of Dose) ^(d)
Gases and Vapors				
H-3 ^(c)	1.61E+00	73.84%	5.46E-01	75.13%
C-14	1.66E-03	0.08%	1.63E-04	0.02%
Kr-85	6.02E-02	2.76%	1.04E-01	14.31%
I-129	3.94E-01	18.05%	3.29E-02	4.53%
Particulates				
Cs-137	6.52E-02	2.99%	2.65E-02	3.65%
Pu-238	1.98E-04	0.01%	1.30E-04	0.02%
Pu-239	6.56E-03	0.30%	4.04E-03	0.56%
Sr-90	2.45E-02	1.12%	7.60E-03	1.05%
U-234	1.79E-04	0.01%	1.74E-04	0.02%
U-238	2.14E-04	0.01%	3.98E-04	0.05%
Unidentified Alpha	6.34E-03	0.29%	3.62E-03	0.50%
Unidentified Beta	3.70E-03	0.17%	1.03E-03	0.14%
Total	2.17E+00	99.6%	7.27E-01	100.0%

NOTE: (a) Committed effective dose.

NOTE: (b) Meat, milk, and vegetables.

NOTE: (c) Dose from tritium in foods calculated with absolute humidity of 12.9 g water/cubic meter of air.

NOTE: (d) Radionuclides contributing 0.01% or more from POPDOSE-SR or CAP88 output.

Data Table A-29. Deer and Hog Hunter Doses

Data Table A-29 Deer and Hog Hunter Doses

2023 Deer and Hog Hunter Doses

Onsite Deer Hunter (Actual Hunter)			
Maximum Individual Dose determined by field measurements =		9.42	mrem
1 animal harvested (1-deer)			
Total gross (live) weight = 143	lbs	65	kg
Total edible weight = 64	lbs	29	kg
Offsite Deer Hunter Dose (Hypothetical Hunter)			
Mean of the gross cesium-137 concentration in onsite deer =		1.80	pCi/g
CSRA background concentration =		0.5	pCi/g
MEI meat consumption rate =		81	kg/y
Cesium-137 adult dose coefficient (from DOE-STD-1196-2021) =	=	5.03E-05	mrem/pCi
Dose =		5.30	mrem
Offsite Hog Hunter Dose (Hypothetical Hunter)			
Mean of the gross cesium-137 concentration in onsite hogs =		1.59	pCi/g
CSRA background concentration =		0.5	pCi/g
MEI meat consumption rate =		81	kg/y
Cesium-137 adult dose coefficient (from DOE-STD-1196-2021) =	=	5.03E-05	mrem/pCi
Dose =		4.44	mrem

Data in red are from the Environmental Monitoring Program Subject Matter Expert

Email from Brian Price to Brooke Stagich (02/27/2024)

Data Table A-30a. Average Concentration in Composites used in the Dose Calculations (pCi/g) Data Table A-30a, Average Concentration in Composites used in the Dose Calculations (pCi/g) Page 1 of 3

Location	Species	Sr-89,90	Cs-137	I-129	Tc-99
Augusta	Bass				
Lock + Dam	Catfish	3.81E-03	3.53E-02		
	Flathead Catfish		2.47E-02		
U3R	Bass		3.04E-02		
Mouth	Catfish		4.18E-02		
	Flathead Catfish		1.79E-02		
	Panfish	3.85E-03	8.67E-02		
Fourmile	Bass		6.90E-02		
Branch Mouth	Catfish		2.29E-02		
	Flathead Catfish		3.12E-02		
	Panfish		1.86E-02		
Steel Creek	Bass		5.76E-02		
Mouth	Catfish		9.04E-02		
	Flathead Catfish		7.98E-02		
	Panfish		7.07E-02		
L3R	Bass		1.44E-01		
Mouth	Catfish		4.28E-02		
	Flathead Catfish		1.29E-01		
	Panfish		2.83E-02		
Hwy-301	Bass		1.56E-02		
Bridge Area	Catfish		1.21E-02		
	Flathead Catfish		2.32E-02		
	Panfish				

Note: Averages are based on three composites of up to five fish of each species from each location.

At least one of the three composite samples had to have a significant result for an average concentration to be reported. Refer to Data Table 5-16 for the radioanalytical results. Data Table A-30b. Total Dose from Consumption of 24 kg/y from Savannah River Fish (mrem)Data Table A-30b, Total Dose from Consumption of 24 kg/y from Savannah River FishPage 2 of
3

Location	Species	Sr-90	Cs-137	I-129	Тс-99	Total
Augusta	Bass					0.00E+00
Lock + Dam	Catfish	1.10E-02	4.23E-02			5.33E-02
	Flathead Catfish		2.96E-02			2.96E-02
U3R	Bass		3.64E-02			3.64E-02
Mouth	Catfish		5.01E-02			5.01E-02
	Flathead Catfish		2.15E-02			2.15E-02
	Panfish	1.11E-02	1.04E-01			1.15E-01
Fourmile	Bass		8.27E-02			8.27E-02
Branch Mouth	Catfish		2.74E-02			2.74E-02
	Flathead Catfish		3.74E-02			3.74E-02
	Panfish		2.23E-02			2.23E-02
Steel Creek	Bass		6.90E-02			6.90E-02
Mouth	Catfish		1.08E-01			1.08E-01
	Flathead Catfish		9.57E-02			9.57E-02
	Panfish		8.48E-02			8.48E-02
L3R	Bass		1.72E-01			1.72E-01
Mouth	Catfish		5.13E-02			5.13E-02
	Flathead Catfish		1.54E-01			1.54E-01
	Panfish		3.39E-02			3.39E-02
Hwy-301	Bass		1.87E-02			1.87E-02
Bridge Area	Catfish		1.44E-02			1.44E-02
	Flathead Catfish		2.78E-02			2.78E-02
	Panfish					0.00E+00

Note: Ingestion dose coefficients are from the DOE Derived Concentration Technical Standard (DOE-STD-1196-2021)

Data Table A-30c. Total Risk from Consumption of 24 kg/y from Savannah River Fish (risk/year)Data Table A-30c, Total Risk from Consumption of 24 kg/y from Savannah River FishPage 3 of
3(risk/year)3

Location	Species	Sr-90	Cs-137	I-129	Тс-99	Total
Augusta	Bass					0.00E+00
Lock + Dam	Catfish	8.71E-09	3.17E-08			4.04E-08
	Flathead Catfish		2.22E-08			2.22E-08
U3R	Bass		2.73E-08			2.73E-08
Mouth	Catfish		3.75E-08			3.75E-08
	Flathead Catfish		1.61E-08			1.61E-08
	Panfish	8.81E-09	7.78E-08			8.66E-08
Fourmile	Bass		6.19E-08			6.19E-08
Branch Mouth	Catfish		2.05E-08			2.05E-08
	Flathead Catfish		2.80E-08			2.80E-08
	Panfish		1.67E-08			1.67E-08
Steel Creek	Bass		5.17E-08			5.17E-08
Mouth	Catfish		8.11E-08			8.11E-08
	Flathead Catfish		7.16E-08			7.16E-08
	Panfish		6.35E-08			6.35E-08
L3R	Bass		1.29E-07			1.29E-07
Mouth	Catfish		3.84E-08			3.84E-08
	Flathead Catfish		1.15E-07			1.15E-07
	Panfish		2.54E-08			2.54E-08
Hwy-301	Bass		1.40E-08			1.40E-08
Bridge Area	Catfish		1.08E-08			1.08E-08
	Flathead Catfish		2.08E-08			2.08E-08
	Panfish					0.00E+00

Note: SRS estimated the potential risks using the cancer morbidity risk coefficients from Federal Guidance Report No. 13.

Radionuclide Groups (a)	Removable (b) dpm/100 cm2	Total (Fixed+Removable)(c) dpm/100 cm2	Volumetric (d) pCi/g
Group 1 Radium, Thorium, and Transuranics: 210Po, 210Pb, 226Ra, 228Ra, 228Th, 230Th, 232Th, 237Np, 239Pu, 240Pu, 241Am, 244Cm, and associated decay chains(e), and others(a)	20	500	3
Group 2 U-nat, 234U, 235U, 238U, and associated decay products(f): 14C, 22Na, 24Na, 32P, 35S, 36Cl, 45Ca, 51Cr, 54Mn, 55Fe, 59Fe, 58Co, 60Co, 63Ni, 65Zn, 89Sr, 90Sr, 94Nb, 99Tc, 106Ru, 110mAg, 109Cd, 111In, 124Sb, 125I, 129I, 131I, 134Cs, 137Cs, 144Ce, 147Pm, 152Eu, 154Eu, 192Ir, 198Au, 241Pu, and others(a)	1000	5000	30
Tritium and tritiated compounds(g)	10,000/100,000(h)	N/A	2000

Data Table A-31. SRS Supplemental Release Criteria Data Table A-31. SRS Supplemental Release Criteria

(a) To determine the specific group for radionuclides not shown, a comparison of the effective dose factors, by exposure pathway, listed in Table A.1 of NCRP Report No. 123

for the radionuclides in question and the radionuclides in the general groups above shall be performed and a determination of the proper group made, based on similarity of the factors.

(b) The amount of removable radioactive material per 100 cm2 of surface area should be determined by swiping the area with dry filter or soft absorbent paper, applying moderate pressure, and then assessing the amount of radioactive material on the swipe with an appropriate instrument of known efficiency. (Note - The use of dry material may not be appropriate for tritium). When removable contamination on objects of surface area less than 100 cm2 is determined, the activity per unit area shall be based on the actual area and the entire surface shall be wiped. It is not necessary to use swiping techniques to measure removable contamination levels if direct scan surveys indicate that the total residual surface contamination levels are within the limits for removable contamination.

(c) The levels may be averaged over one square meter provided the maximum surface activity in any area of 100 cm2 is less than three times the value specified. For purpose of

averaging, any square meter of surface shall be considered to be above the surface contamination value if: (1) from measurements of a representative number of sections it is determined that the average contamination exceeds the applicable value; or (2) it is determined that the sum of the activity of all isolated spots or particles in any 100 cm2 area exceeds three times the applicable value.

(d) Volume criteria will only be applied for the purpose of release of materials for disposal in a state, DOE, permitted or approved on-site landfill.

(e) For decay chains, the screening levels represent the total activity (i.e., the activity of the parent plus the activity of all progeny) present.

(f) Alpha component of activity

(g) Tritium contamination may diffuse into the volume or matrix of materials. Evaluation of surface contamination shall consider the extent to which such contamination may

migrate to the surface in order to ensure the surface contamination value is not exceeded. Once this contamination migrates to the surface, it may be removable, not fixed; therefore, a "Total" value does not apply. (h) The criterion of 10,000 dpm/100 cm2 will be used for release of material for unrestricted use (reuse or recycle). The criterion of 100,000 dpm/100 cm2 will be used for the

controlled on-site landfill disposal of material. (Note - DOE Suspension (July 2000) for recycle of metals will apply until rescinded). However, WSRC will only implement this more relaxed tritium surface criterion if a future exemption to 10CFR835 is granted.

Data Table A-32. Biota Dose Assessment

Data Table A-32, Biota Dose Assessment

Location	Sum-of-the-Fractions of BCGs
FM-2	0.0228
FM-2B	0.0386
FM-3A	0.0282
FM-6	0.0286
FM-A7	0.0262
L3R-1A	0.0012
L3R-3	0.0019
PB-3	0.0005
SC-2A	0.0022
SC-4	0.0025
TB-5	0.0026
U3R-1A	0.0018
U3R-3	0.0003
U3R-4	0.0068

Initial Level 1 Aquatic Systems Screen using Maximum Radionuclide Concentrations in Water and Sediment^(a,b)

Note: Values are provided in SRNL-L3220-2024-00003

Initial Level 1 Terrestrial Systems Screen using Maximum Radionuclide Concentrations in Soil^(a,b)

Location	Sum-of-the-Fractions of BCGs
F-Area	0.0054
H-Area	0.0059
Z-Area	0.0029
643-26E	0.0074
Burial Ground-North	0.0078

Note: Values are provided in SRNL-L3220-2024-00002

a. Soils and sediment are sampled on an annual basis. Stream water is generally sampled monthly.

b. Negative concentrations were assumed to be 0.

Include appendix material here if necessary. Use the "Heading 6" style for each appendix in order for captions to work correctly.

Distribution: Appropriate customer contacts should be added at author's discretion.